


VRF Indoor Unit 45VMW005---3 — High Wall



Submittal Data

Job Name _____ Location _____
Tag _____

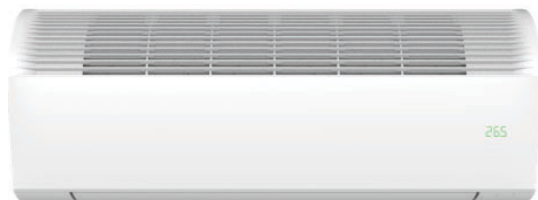

STANDARD FEATURES

- Dual Guided Air Design Provides Smoother and More Comfortable Air Flow
- Seven Fan Speeds
- Multi-Refrigerant Outlet Piping Methods - Left, Right or Rear
- Built in EXV (Electronic Expansion Valve) for Installation Ease
- Internally Installed A2L Refrigerant Leak Sensor

Indoor Unit Model		45VMW005---3
PERFORMANCE		
Total Cooling Capacity	Btu/h	5,000
Total Heating Capacity	Btu/h	6,000
Airflow (H / M / L)	CFM	249/241/233/ 225/217/209/ 201
Sound Pressure (H / M / L)	dBA	31/30.6/30/29.6/ 29.1/28.7/28
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Rated Motor (Output)	W	20
Minimum Circuit Amps	A	0.55
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA

Pipe Connection Size - Liquid	in.	1/4
Pipe Connection Size - Suction	in.	1/2
Pipe Connection Size - Drain	in.	5/8
Refrigerant		R-454B
Unit Width	in.	29-1/2
Unit Height	in.	11-5/8
Unit Depth	in.	10-7/16
Unit Net Weight	lb	23

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 45VM900001
☐ Wired Remote Controller - Non-Prog. 45VM900002

DIMENSIONAL DRAWING

INDOOR UNIT HIGH WALL 45VMW005---3

