

VRF Outdoor Unit 38VMA432HDS5-1 - Heat Pump



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



Heat Pump Features

- 6, 8, 10, and 12 ton modules available
- Modules have inverter-driven scroll compressors
- Direct-drive, inverter-driven outdoor motor
- Modules can be combined to form larger systems, up to 36 tons
- 3280 ft (1000 m) actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Up to 3937 ft (1200 m) control wiring between the outdoor units and indoor units
- Operating temperature range
 Cooling (db): 5° to 125°F
 (-15° to 52°C)
 Heating (wb): -5° to 64°F
 (-21° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	38VMA432HDS5-1	
Header Unit Model	38VMA144HDS5-1	
Follower Model	38VMA144HDS5-1	
Follower Model	38VMA144HDS5-1	
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	420,000
Nominal Heating Capacity	Btu/h	480,000
Maximum Total Connected Indoor Unit Capacity		50% to 135%
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/W·h	9.50/17.00
Power Consumption, Ducted FCUs	kW	40.30
EER/IEER, Ductless FCUs	Btu/W·h	9.50/17.00
Power Consumption, Ductless FCUs	kW	40.70
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.20
Power Consumption, Ducted FCUs	kW	38.50
COP at 47°F, Ductless FCUs		3.20
Power Consumption, Ductless FCUs	kW	38.90
Fan Type (Qty)		Propeller (6)
Airflow, Standard Range	CFM	8830 + 8830 + 8830
Sound Pressure	dBA	69
External Static Pressure*	in. wg	0.24
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/3/60
Minimum Circuit Amps (MCA)	A	70 + 70 + 70
Recommended Fuse Size	A	80 + 80 + 80

COMPRESSORS		
Type (Number)		Inverter Hermetic Scroll (6)
FAN MOTOR		
Motor Type (Steps)		Inverter Direct Driven (13)
Motor Output	kW	0.34 (X3) + 0.30 (X3)
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)**	in.	3/4 (Brazed)
Pipe Connection Size - Gas (Low Pressure)**	in.	1-3/8 (Brazed)
Balance	in.	1/4 (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	3 X 37.5
Unit Width	in.	3 X 52-3/4
Unit Height	in.	64-3/8
Unit Depth	in.	31-1/8
Net Weight	lb	780 + 780 + 780
REQUIRED ACCESSORY		
Twinning Kit		40VM900022

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
 Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

**Main pipe size leaving twinning kit.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.



LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING


OUTDOOR UNIT COMBINATION 38VMA432HDS5-1

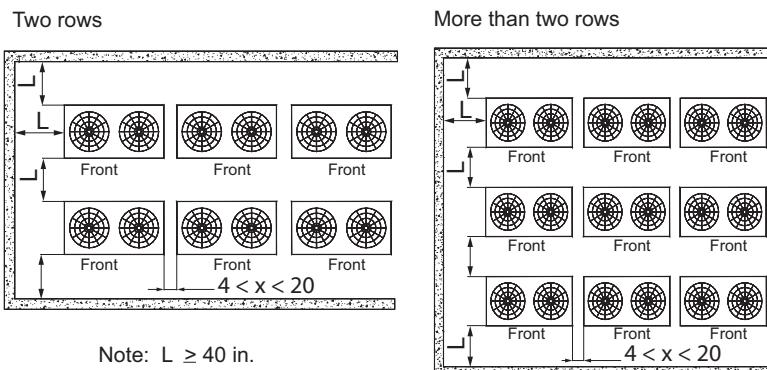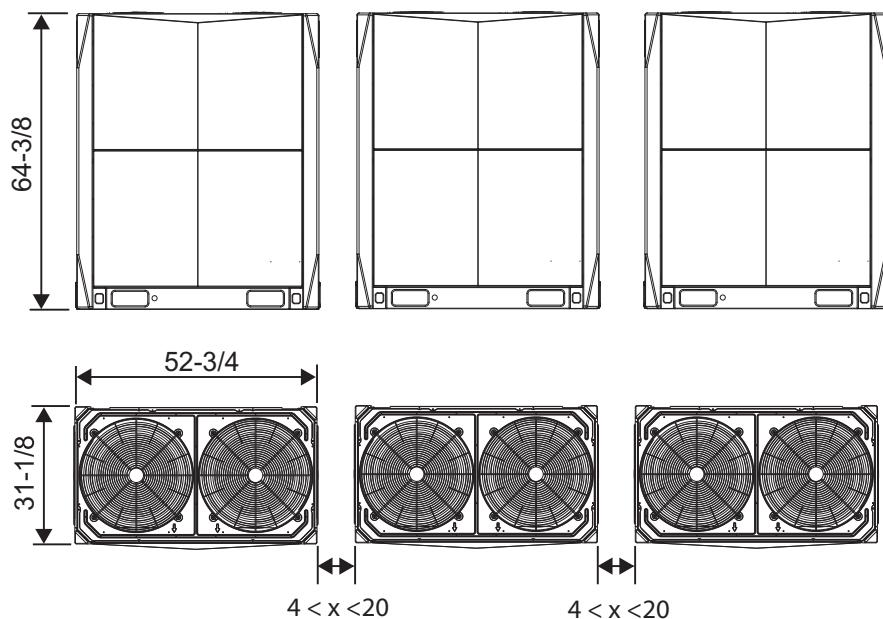

Note: All dimensions are shown in inches.

Model Name	Outdoor Unit		
	Header Unit	Follower Unit	Follower Unit
38VMA432HDS5-1	38VMA144HDS5-1	38VMA144HDS5-1	38VMA144HDS5-1

**DIMENSIONAL DRAWING
OUTDOOR SINGLE UNIT 38VMA144HDS5-1**

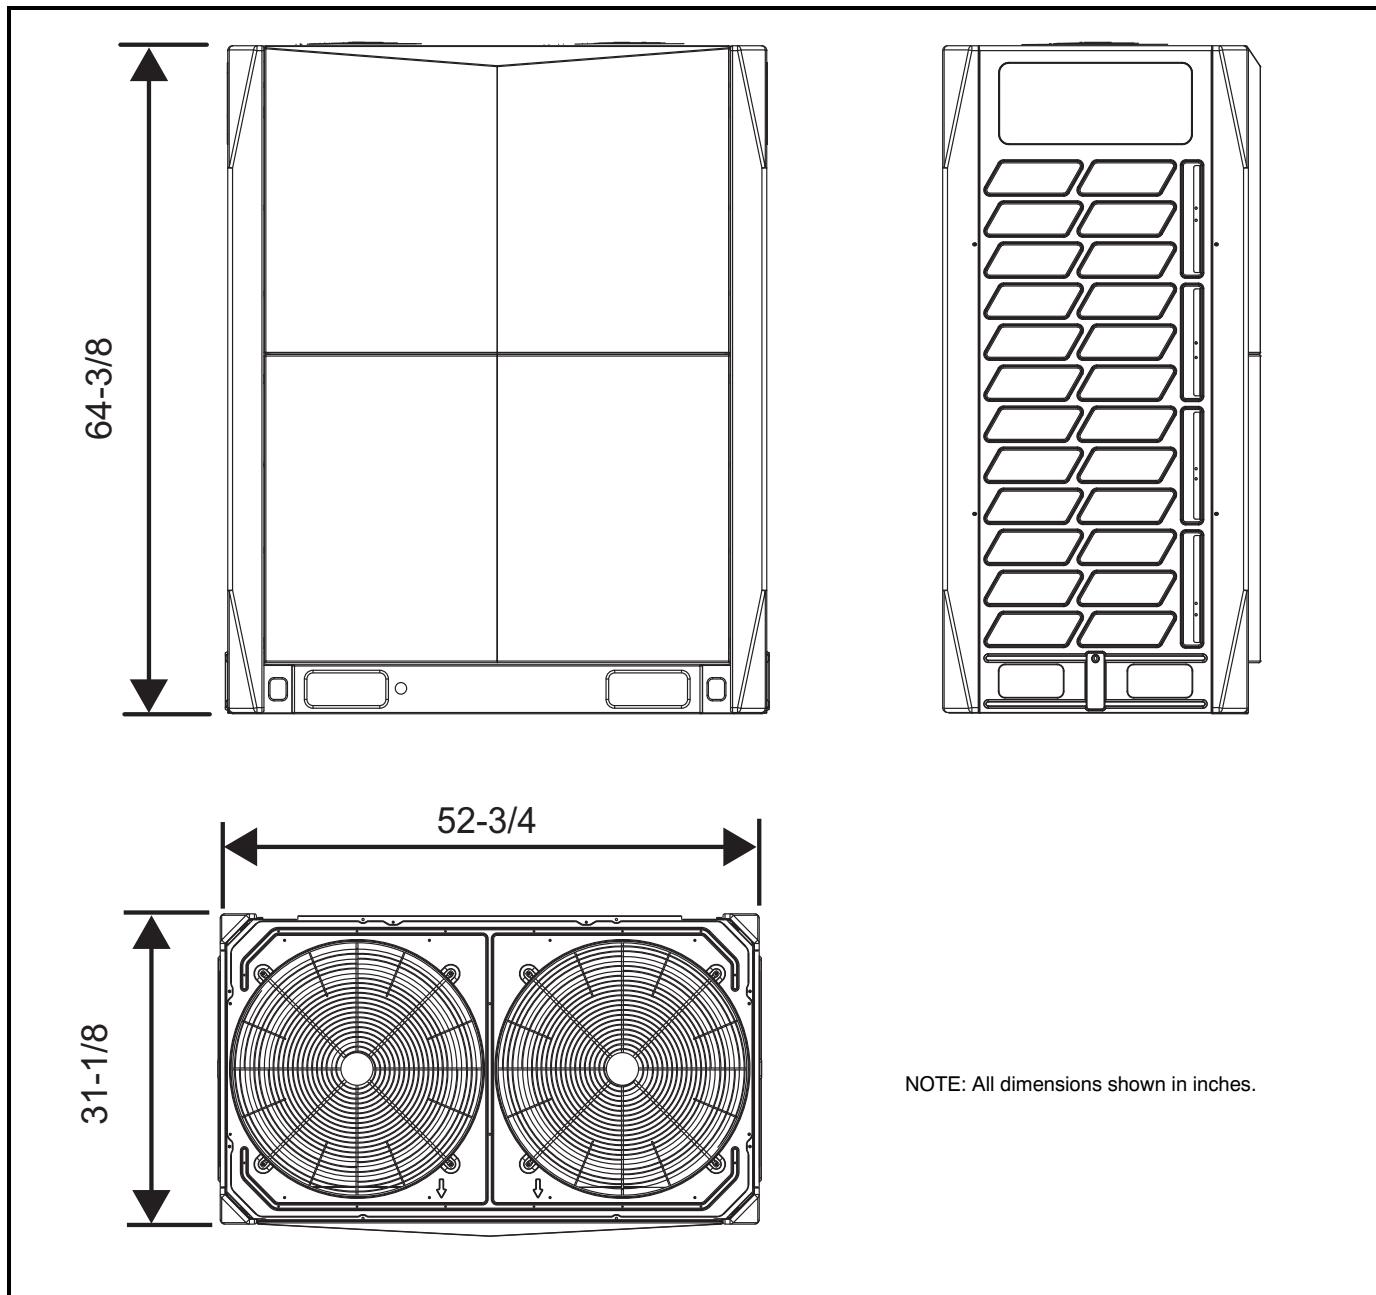

© Carrier Corporation 2018



Printed in U.S.A.

Form 38VMH4325-C-2SD

Pg 3

08-18

Replaces: 38VMH4325-C-1SD

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.