

VRF Indoor Unit 40VMU036---3 — Under Ceiling / Floor



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds – High, Medium and Low
- Louver Control (Fixed or Swing)
- Knockout for Outside Air
- Built-in IR Receiver and Display Panel
- Built-in EXV (Electronic Expansion Valve) for Installation Ease

Indoor Unit Model		40VMU036---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	40,000
Airflow (H / M / L)	CFM	1094 / 976 / 906
Sound Pressure (H / M / L)	dBA	52.1 / 49.3 / 47.7
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	134
Minimum Circuit Amps	A	1.80
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	66
Unit Height	in.	27
Unit Depth	in.	10
Unit Net Weight	lbs.	106

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Centralized Controller 40VM900004
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING
INDOOR UNIT UNDER CEILING / FLOOR 40VMU036---3

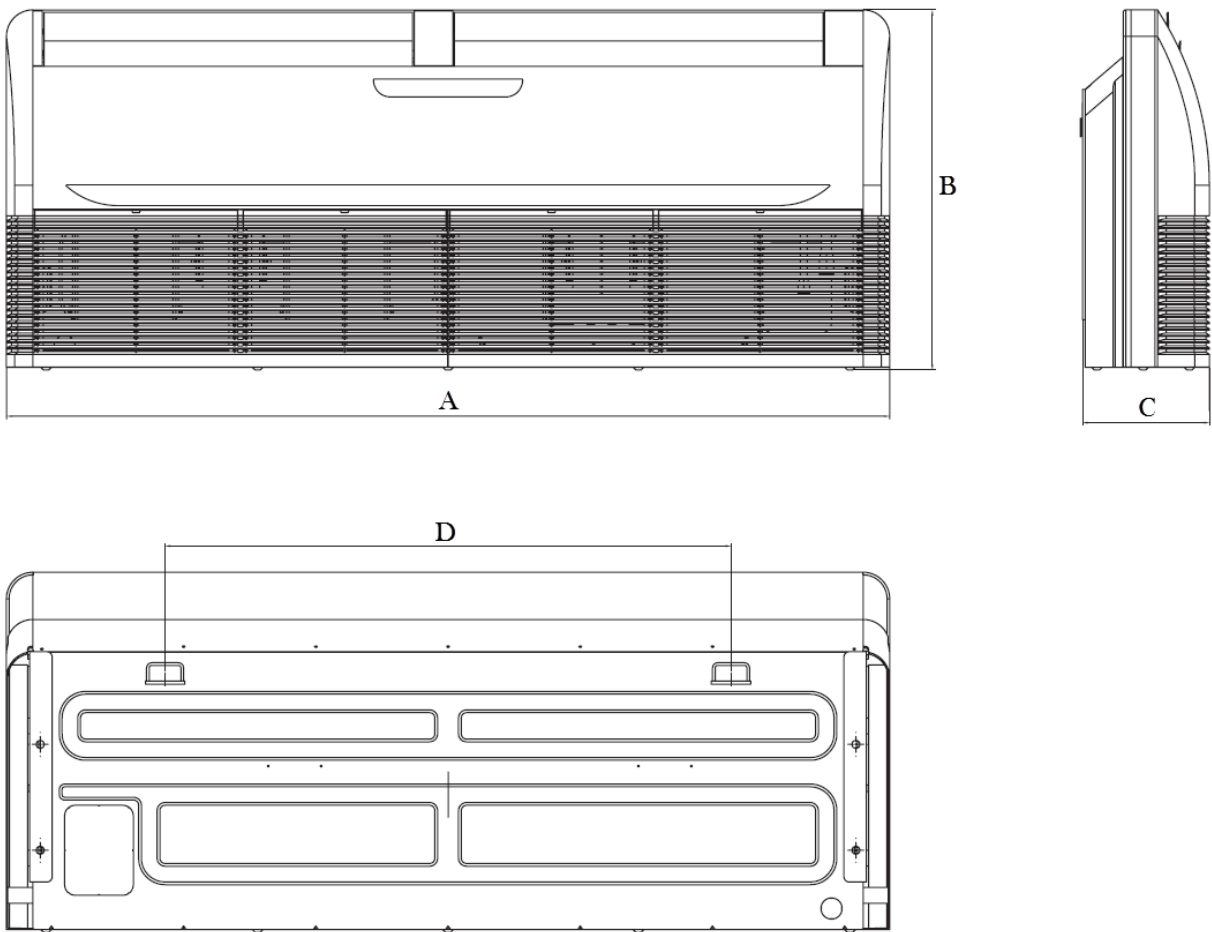

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
036	66	27	10	42-1/8

NOTE: All dimensions shown in inches.

