


VRF Indoor Unit 40VMZ018---3—Reheat Unit



Submittal Data

Job Name _____ Location _____
Tag _____

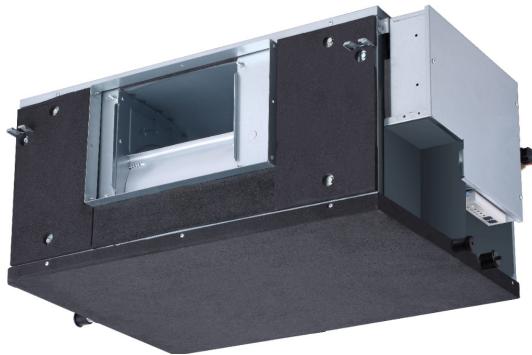

STANDARD FEATURES

- Ducted Supply and Return Opening
- Three Fan Speeds - High, Medium, and Low
- Built in EXV (Electronic Expansion Valve) for Install Ease

INDOOR UNIT MODEL	40VMZ018---3	
-------------------	--------------	--

PERFORMANCE

Heating Rated Capacity	Btu/h	18,000
Airflow (H / M / L)	CFM	1059 / 971 / 882
Sound Pressure (H / M / L)	dBA	44.5 / 43.8 / 42.2

ELECTRICAL

Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	141
Minimum Circuit Amps (MCA)	A	1.9
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006


PHYSICAL DATA

Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Minimum External Static Pressure (ESP) (Factory Default)	in. wg	0.2
Maximum External Static Pressure (ESP)	in. wg	1.0
Refrigerant		R-410A
Unit Width	in.	37-1/2
Unit Height	in.	16-1/2
Unit Depth	in.	27-3/16
Net Unit Weight	lb	112



DIMENSIONAL DRAWING
INDOOR REHEAT UNIT 40VMZ018---3

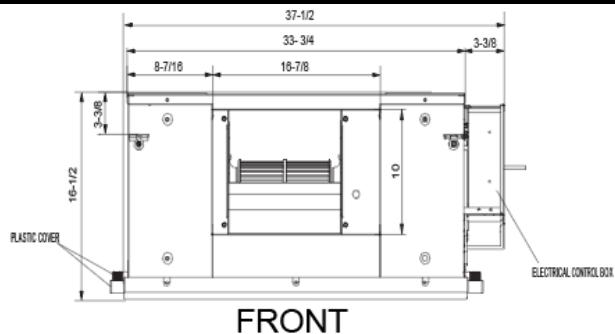


FRONT

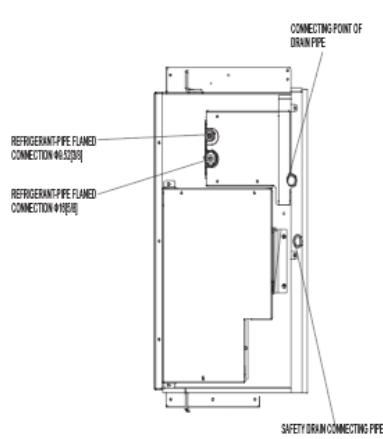

RIGHT SIDE

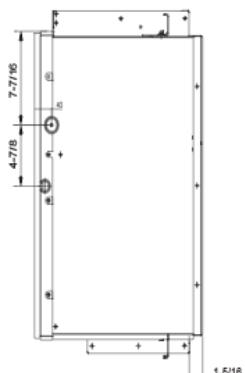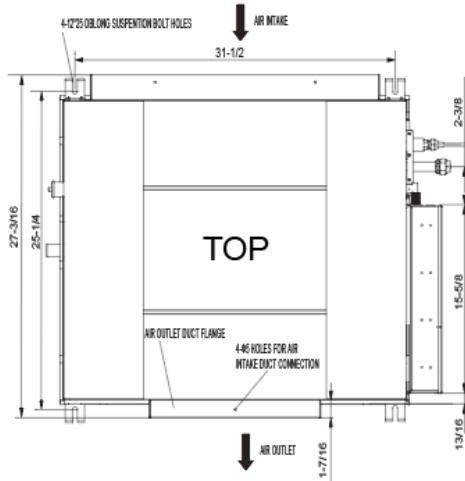

LEFT SIDE

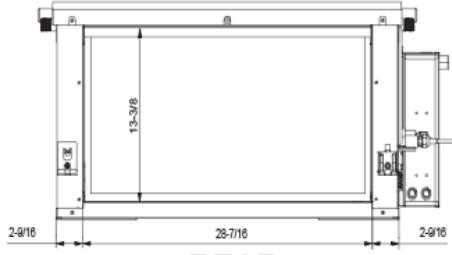

REAR

Unit: inches (mm)

**SERVICE CLEARANCE
INDOOR REHEAT UNIT 40VMZ018---3**

