


SHRMe RBM-Y0613FUL—Single Port Flow Selector

TOSHIBA
Carrier

Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____

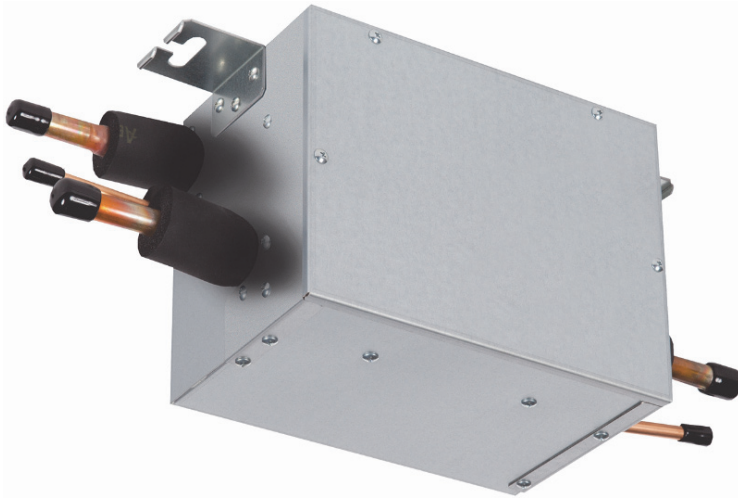

Single Port Flow Selector Features

- Maximum piping length between port and indoor unit is 49 ft.
- Single port flow selector is powered by its indoor unit. Power and control wiring included with unit.
- Multiple indoor units can be connected to one box.


MODEL NAME	RBM-Y0613FUL	
POWER SUPPLY	208-230/1/60	
Current Draw	A	<1
MOCP	A	15
Number of Connectable Indoor Units	8	
Connectable indoor unit capacity	kBtu/h	38 to 61
DIMENSIONS	Height (in)	7.49
	Width (in)	9.77
	Depth (in)	6.3
TOTAL WEIGHT	lbs	13
Connecting Port Diameter (Indoor Unit Side)	Liquid Side (in)	3/8
	Gas Side (in)	5/8
Connecting Port Diameter (Outdoor Unit Side)	Liquid Side (in)	3/8
	Discharge Gas Side (in)	1/2
	Suction Gas Side (in)	5/8
Connection	Braze	

LEGEND


MOCP — Maximum Over Current Protection

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

SINGLE PORT FLOW SELECTOR (RBM-Y0613FUL)

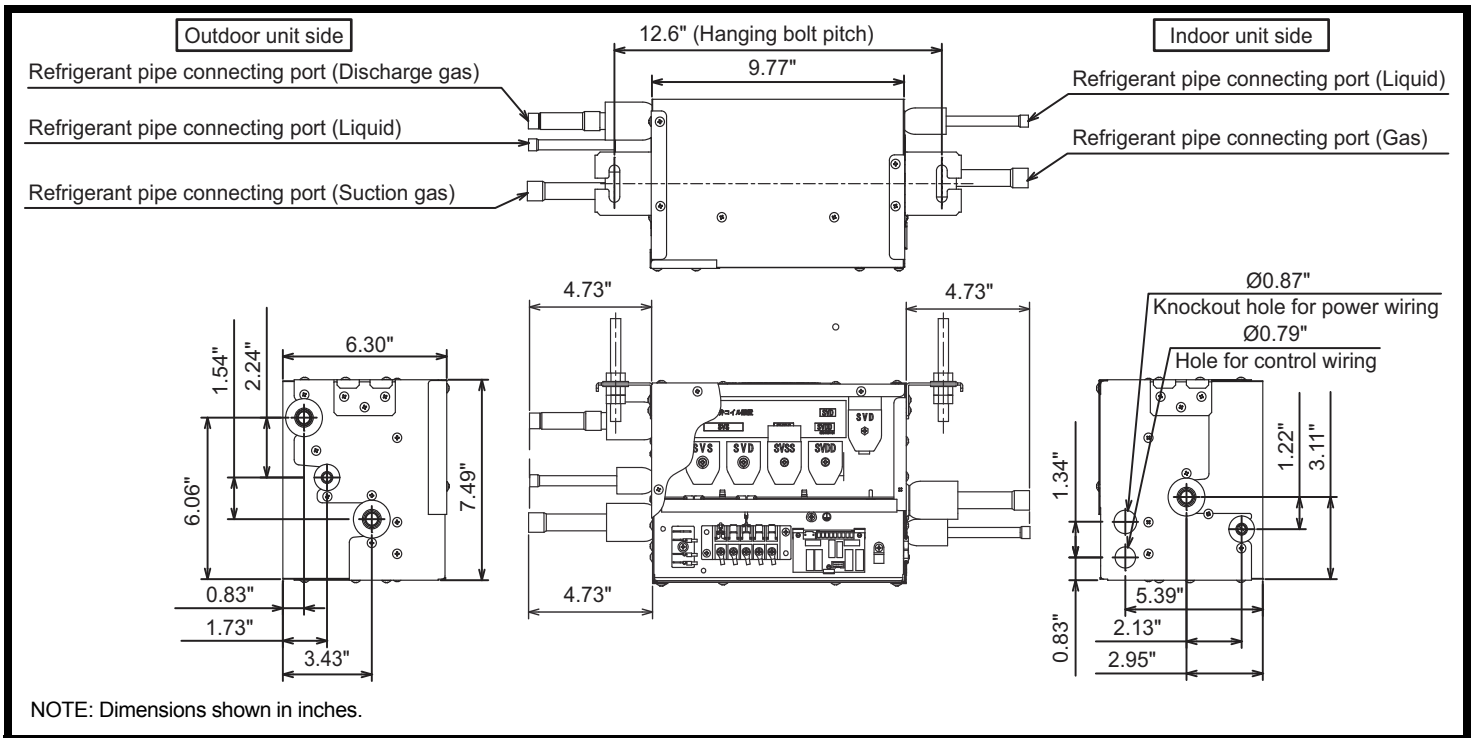


SINGLE PORT FLOW SELECTOR (RBM-Y0613FUL) WIRING DIAGRAM

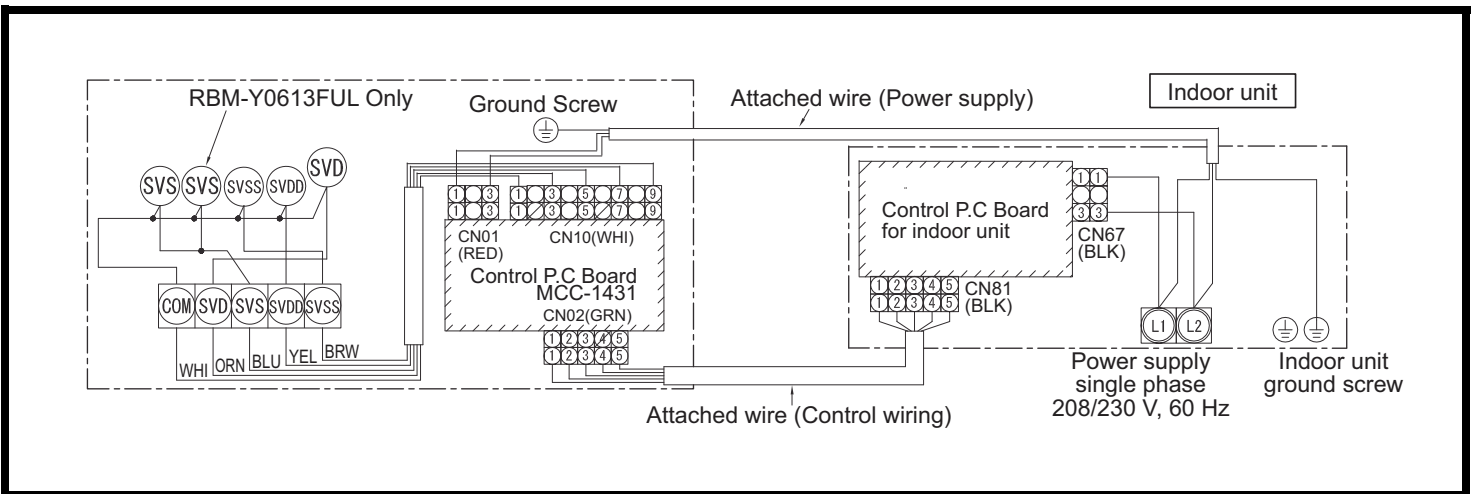

SINGLE PORT FLOW SELECTOR (RBM-Y0613FUL) SERVICE CLEARANCE

RBM-Y0613FUL

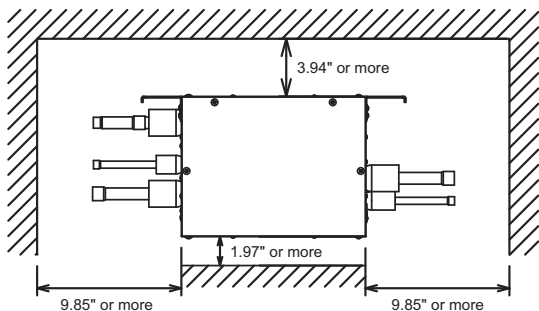

NOTE: Dimensions shown in inches.

