

# VRF Outdoor Unit 38VMA216HDS6-1 - Heat Pump



## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### Heat Pump Features

- 6, 8, 10, and 12 ton modules available
- Modules have inverter-driven scroll compressors
- Direct-drive, inverter-driven outdoor motor
- Modules can be combined to form larger systems, up to 36 tons
- 3280 ft (1000 m) actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Up to 3937 ft (1200 m) control wiring between the outdoor units and indoor units
- Operating temperature range  
 Cooling (db): 5° to 125°F  
 (-15° to 52°C)  
 Heating (wb): -5° to 64°F  
 (-21° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	38VMA216HDS6-1	
Header Unit Model	38VMA120HDS6-1	
Follower Model	38VMA096HDS6-1	
<b>PERFORMANCE</b>		
Nominal Cooling Capacity	Btu/h	205,800
Nominal Heating Capacity	Btu/h	234,000
Maximum Total Connected Indoor Unit Capacity		50% to 135%
<b>COOLING EFFICIENCY†</b>		
EER/IEER, Ducted FCUs	Btu/Wh	11.30/21.30
Power Consumption, Ducted FCUs	kW	16.60
EER/IEER, Ductless FCUs	Btu/Wh	11.70/20.50
Power Consumption, Ductless FCUs	kW	15.30
<b>HEATING EFFICIENCY†</b>		
COP at 47°F, Ducted FCUs		3.54
Power Consumption, Ducted FCUs	kW	17.80
COP at 47°F, Ductless FCUs		3.62
Power Consumption, Ductless FCUs	kW	16.70
Fan Type (Qty)	Propeller (4)	
Airflow, Standard Range	CFM	8250 + 7650
Sound Pressure	dBA	65
External Static Pressure*	in. wg	0.08
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)	A	25 + 25
Recommended Fuse Size	A	30 + 30

### COMPRESSORS

Type (Number)		Inverter Hermetic Scroll (2)
---------------	--	------------------------------

### FAN MOTOR

Motor Type (Steps)	Inverter Direct Driven (13)	
Motor Output	kW	4 X 0.27

### PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)**	in.	5/8 (Brazed)
-------------------------------------------------	-----	--------------

Pipe Connection Size - Gas (Low Pressure)**	in.	1-1/8 (Brazed)
---------------------------------------------	-----	----------------

Balance	in.	1/4 (Brazed)
---------	-----	--------------

Refrigerant	R-410A	
-------------	--------	--

Factory Charge††	lb	2 X 37.5
------------------	----	----------

Unit Width	in.	2 X 52-3/4
------------	-----	------------

Unit Height	in.	64-3/8
-------------	-----	--------

Unit Depth	in.	31-1/8
------------	-----	--------

Net Weight	lb	2 X 659
------------	----	---------

### REQUIRED ACCESSORY

Twinning Kit	40VM900021	
--------------	------------	--

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db  
 Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

\*Requires setting by menu functions.

\*\*Main pipe size leaving twinning kit.



††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.



### LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb


**DIMENSIONAL DRAWING**  
**OUTDOOR UNIT COMBINATION 38VMA216HDS6-1**

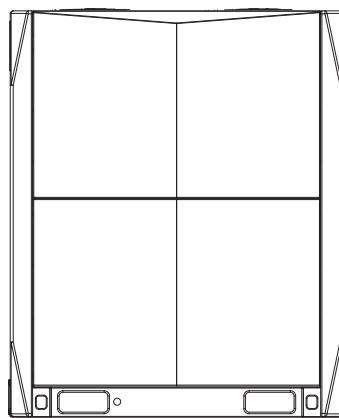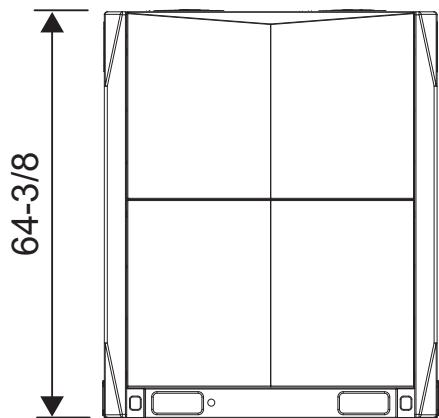

Two rows

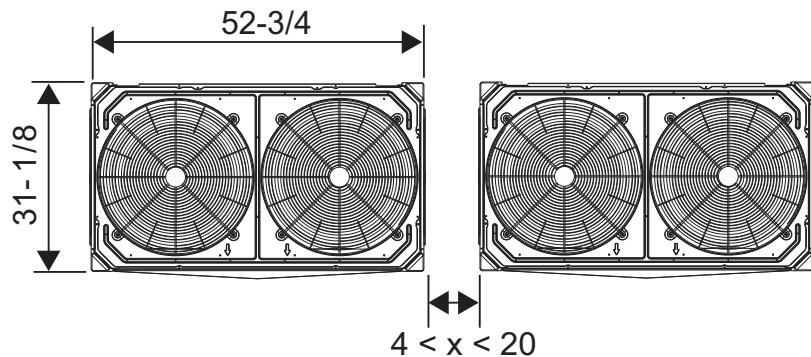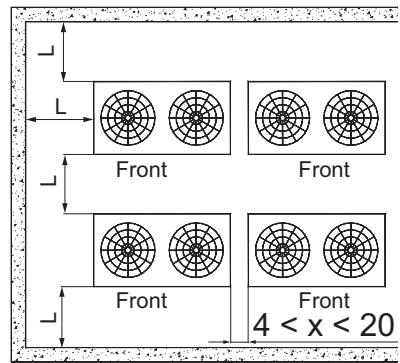


More than two rows

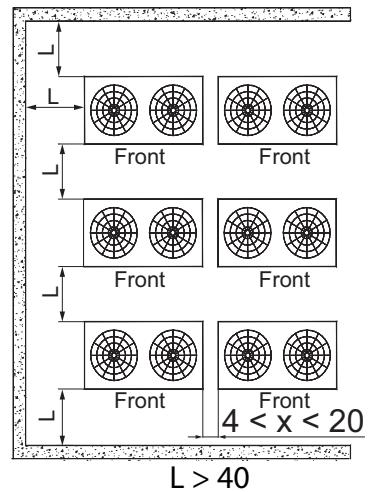

NOTE: All dimensions shown in inches.

MODEL NAME	OUTDOOR UNIT	
	HEADER UNIT	FOLLOWER UNIT
38VMA216HDS6-1	38VMA120HDS6-1	38VMA096HDS6-1

**DIMENSIONAL DRAWING**  
**OUTDOOR SINGLE UNIT 38VMA120HDS6-1 and 38VMA096HDS6-1**

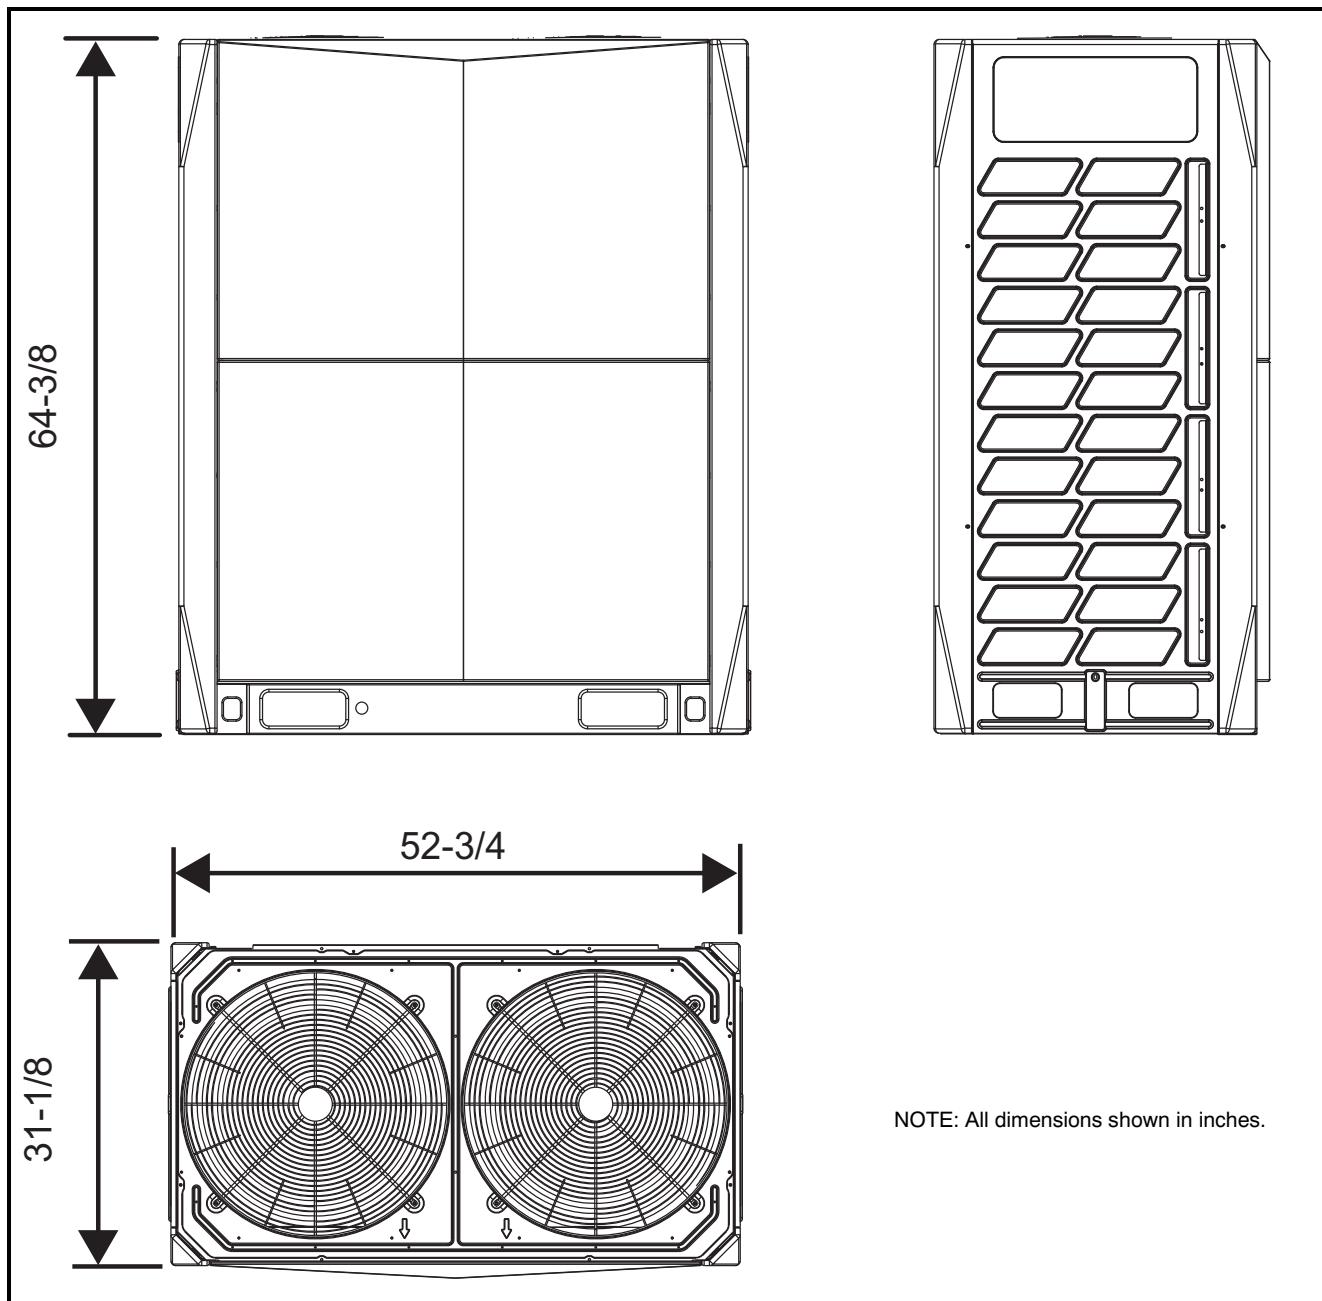

NOTE: All dimensions shown in inches.



© Carrier Corporation 2018



Printed in U.S.A.

Form 38VMH2166-C-2SD

Pg 3

08-18

Replaces: 38VMH2166-C-1SD

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.