

SMMSu / SHRMu VRF Indoor Unit MMD-UP0121BHP-UL—Concealed Duct

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____



A210775

SMMSu / SHRMu CONCEALED DUCT FEATURES

- R-410A Refrigerant
- Twelve sizes from 7,500 to 54,000 Btu/h
- Standard condensate pump with 24.3 in. lift capability
- Quiet operation, as low as 30 dBA
- Rear return configurable for bottom return
- Auto or manually set three fan speeds
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMD-UP0121BHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	12,000
Heating Rated Capacity	Btu/h	13,500
Fan Type (Qty)		Centrifugal (1)
External Static Pressure (ESP)	in. WG	0.4 (Factory default) 0.6 (Max)
Standard Airflow (H / M / L)	CFM	589 / 489 / 394
Sound Pressure (H / M / L)*	dBA	44 / 41 / 35
FILTER (Standard)		
Type		Washable
Quantity		1
MERV Corresponding Value		5
Dimensions (W x L x D)	in.	10-5/8 x 27-5/8 x 5/8
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.09
Full Load Amps (FLA)	A	0.88
Minimum Circuit Amps (MCA)	A	1.10
Maximum Overcurrent Protection (MOCP)	A	15.0


MOTOR		
Motor Type	DC Inverter Driven	
Motor Watts		150
PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (Flare)
Pipe Connection Size - Suction	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Zinc Hot Dipped Steel Plate	
Unit Width	in.	39-3/8
Unit Height	in.	10-7/8
Unit Depth	in.	29-5/8
Net Weight	lb	73

ACCESSORIES

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL / RBC-AWSU52-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- ☐ Remote Sensor TCB-TC41U-UL
- ☐ Auxiliary OA Flange TCB-FF151US-UL
- ☐ Zoning Duct Flange TCB-SF56C6BP-UL
- ☐ Filter Kit TCB-FW561DP-UL

* The actual values in an external operating environment are generally higher than the indicated values due to ambient noise.

DIMENSIONAL DRAWING **CONCEALED DUCT MMD-UP0121BHP-UL**

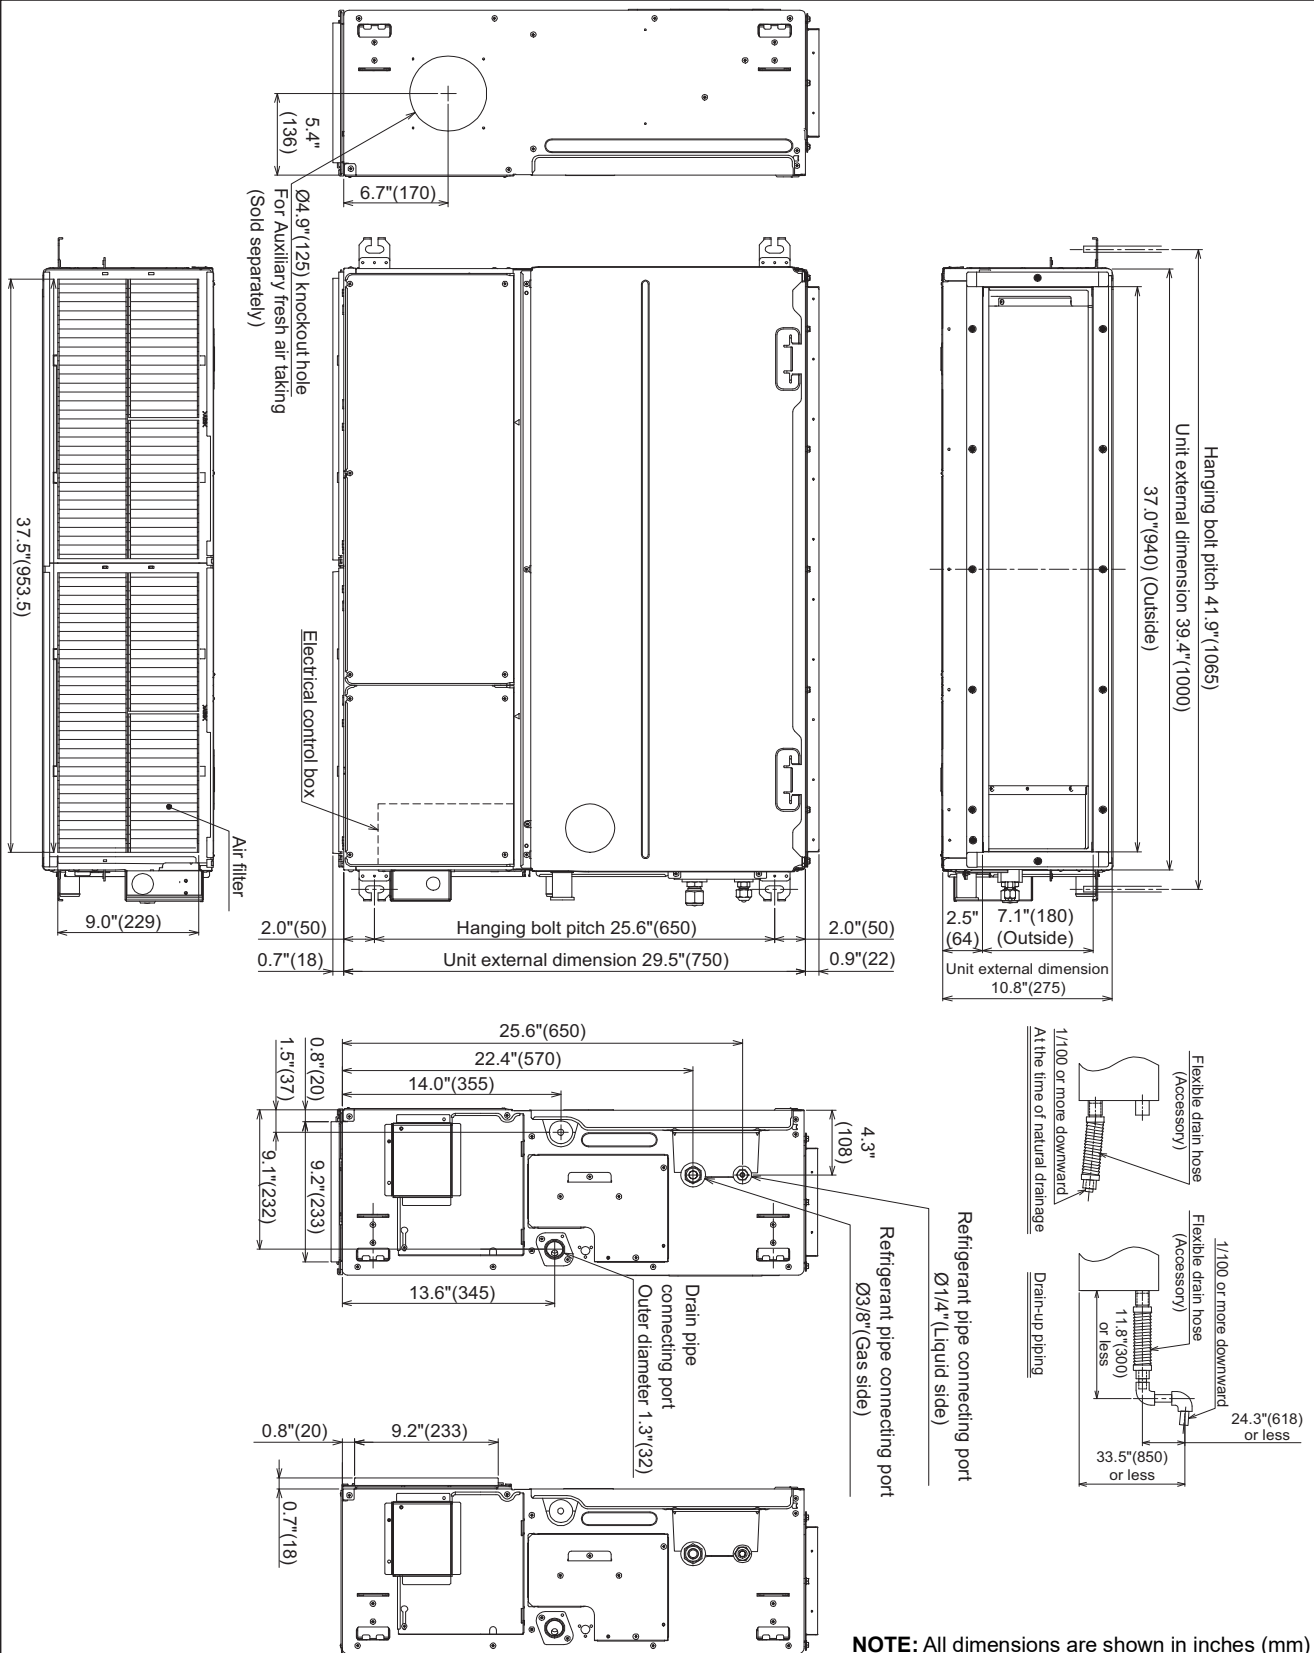

DIMENSIONAL DRAWING

CONCEALED DUCT MMD-UP0121BHP-UL (Cont.)

