


VRF Outdoor Unit MMY-MUP1921FT6P-UL - Heat Recovery

TOSHIBA
Carrier

Submittal Data

Job Name _____
Tag _____

Location _____

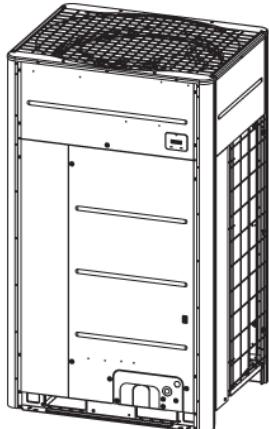

A210612

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range
Cooling (db): -10° to 125°F
(-15° to 52°C)
Heating (wb): -22° to 60°F
(-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Header Unit Model		MMY-MUP1921FT6P-UL	
PERFORMANCE			
Nominal Cooling Capacity	Btu/h	192,000	
Nominal Heating Capacity	Btu/h	216,000	
Maximum Number of Indoor Units		34	
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†			
SCHE, Ducted FCUs		29.5	
SCHE, Ductless FCUs		30.5	
COOLING EFFICIENCY†			
EER/IEER, Ducted FCUs	Btu/Wh	10.7/20.7	
Power Consumption, Ducted FCUs	kW	15.30	
EER/IEER, Ductless FCUs	Btu/Wh	10.7/21.4	
Power Consumption, Ductless FCUs	kW	16.78	
HEATING EFFICIENCY†			
COP at 47°F, Ducted FCUs		3.37	
Power Consumption, Ducted FCUs	kW	16.02	
COP at 47°F, Ductless FCUs		3.64	
Power Consumption, Ductless FCUs	kW	16.17	
Fan Type (Qty)		Propeller (2)	
Airflow, Standard Range	CFM	9712	
Sound Pressure	dBA	68.0	
External Static Pressure*	in. wg	0.321	
LEGEND			
db	— Dry Bulb		
COP	— Coefficient of Performance		
EER	— Energy Efficiency Ratio		
FCU	— Fan Coil Unit		
IEER	— Integrated Energy Efficiency Ratio		
wb	— Wet Bulb		
SCHE	— Simultaneous Cooling and Heating Efficiency		

ELECTRICAL

Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)	A	31.8
Maximum Overcurrent Protection (MOCP)	A	45

COMPRESSORS

Type (Number)		Hermetic Twin Rotary (2)
---------------	--	--------------------------

FAN MOTOR

Motor Output	kW	0.73 x 2
--------------	----	----------

PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 (Brazed)

Discharge - Gas (High/Low Pressure)		7/8 (Brazed)
-------------------------------------	--	--------------

Refrigerant		R-410A
-------------	--	--------

Factory Charge††	lb	19.8
Unit Width	in.	51-1/2
Unit Height	in.	66-1/2
Unit Depth	in.	31-1/4
Net Weight	lb	829

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

DIMENSIONAL DRAWING

OUTDOOR UNIT MMY-MUP1921FT6P-UL

Note)

1. If there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 78.7in [2000mm] apart from the obstacle.
2. Draw out the pipe procured locally to the front of the outdoor unit horizontally, and keep 19.7in [500mm] or more between the outdoor unit and traversing pipe if placing pipe transversely.

