

Submittal Data

Job Name _____ Location _____
Tag _____





Dx Interface Pulse Motor Valve (PMV) kit Features

- Kit enables connection of 3rd-party unit to Toshiba Carrier VRF system
- Integral Pulse Motor Valve (PMV)
- Simple installation via 2 brazed refrigerant connections
- Controller Options:
 - Return Air (RA) Control (TCB-IFDA1GUL)

MODEL NAME	RBM-A0121GUL	
MAX. CAPACITY	kBtu/h	12
PIPING CONNECTION SIZE	in	1/4
COMMUNICATION CABLE	AWG	20 or (22 x 6)
POWER SUPPLY	Powered by Dx-Controller (12VDC)	
DIMENSIONS	Height (in)	15.7
	Width (in)	9.8
	Depth (in)	3.2
NET WEIGHT	lbs	6
CONNECTION	Brazed	
MAX. PIPING DISTANCE		
Dx-PMV kit to IDU	ft	Max. 16
ODU to IDU RA CONTROL	ft	Refer to Toshiba Carrier Selection Software

NOTE: Wiring from Dx Controller to PMV kit is field-supplied.

Dimensional Drawing
Dx Pulse Motor Valve (PMV) Kit (RBM-A0121GUL)

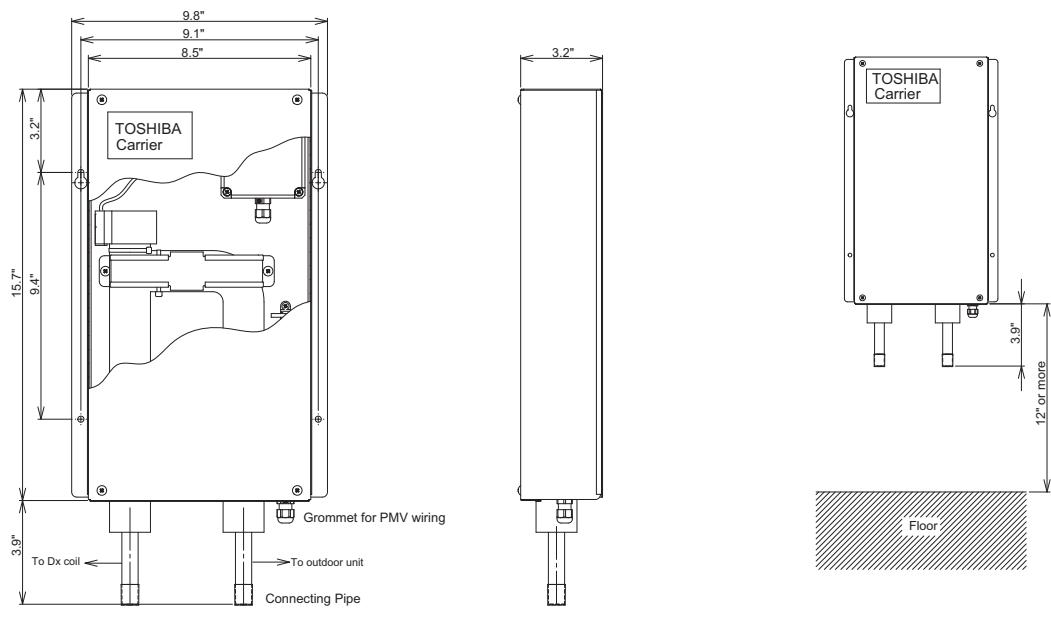

NOTE: Dimensions shown in inches.

PIPING AND WIRING LAYOUT

Dx-Pulse Motor Valve (PMV) Kit (RBM-A0121GUL)

