


SHRMe RBM-Y0384FUL–Single Port Flow Selector (Long)

TOSHIBA
Carrier

Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____

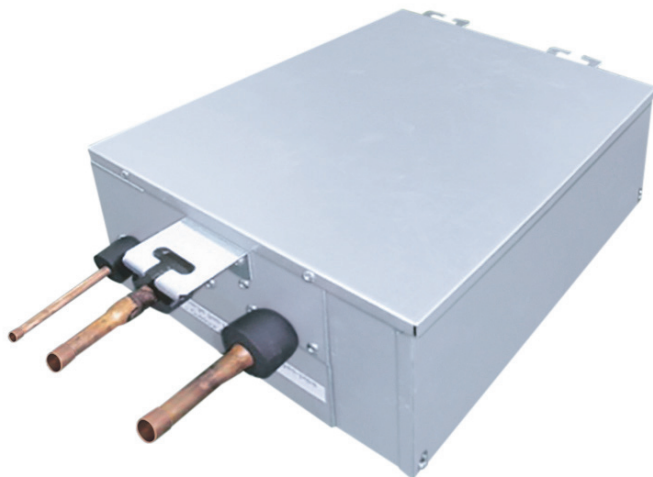

Single Port Flow Selector (Long) Features

- Maximum piping length between port and indoor unit is 164 ft.
- Power and control cable are field supplied and installed.
- Multiple indoor units can be connected to one box.

MODEL NAME	RBM-Y0384FUL	
POWER SUPPLY	208-230/1/60	
Current Draw	A	<1
MOCP	A	15
Number of Connectable Indoor Units	5	
Connectible indoor unit capacity/port	kBtu/h	Below 38
DIMENSIONS	Height (in)	7.10
	Width (in)	16.80
	Depth (in)	11.80
TOTAL WEIGHT	lbs	27
Connecting Port Diameter (Indoor Unit Side)	Liquid Side (in)	3/8
	Gas Side (in)	5/8
Connecting Port Diameter (Outdoor Unit Side)	Liquid Side (in)	3/8
	Discharge Gas Side (in)	1/2
	Suction Gas Side (in)	5/8
Connection	Braze	


LEGEND

MOCP — Maximum Over Current Protection


Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

SINGLE PORT FLOW SELECTOR CLEARANCE (RBM-Y0384FUL)

Installation space

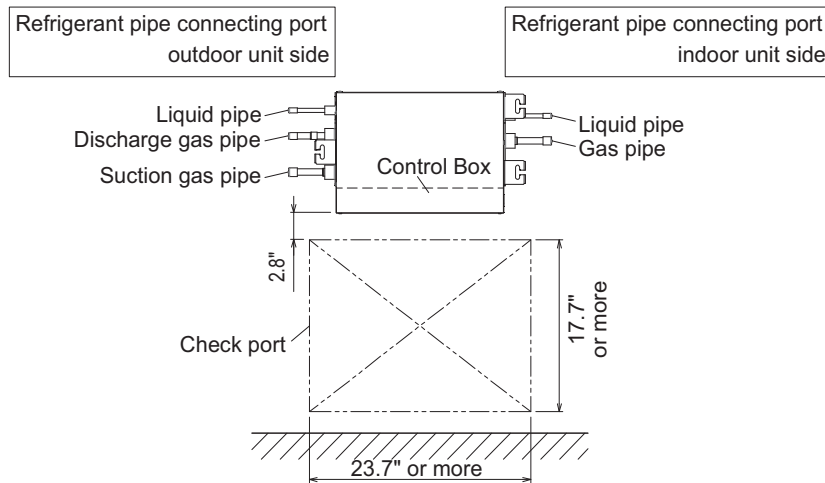


When attached pipes are used

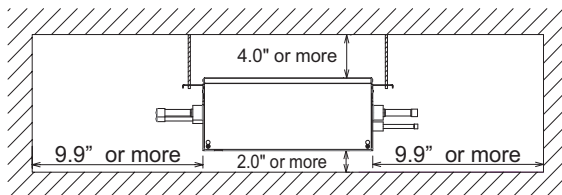


* In case of using the attached pipe (accessory) ;
13.8" (For Y0384FUL)

NOTE: Dimensions shown in inches.


SINGLE PORT FLOW SELECTOR (RBM-Y0384FUL) WIRING DIAGRAM

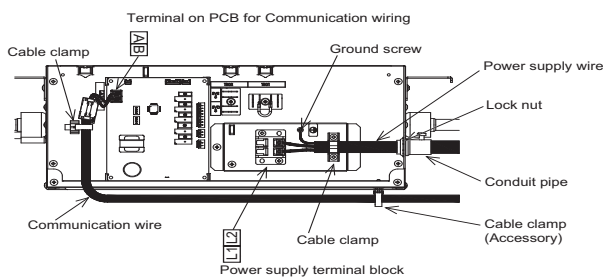

Communication Wiring

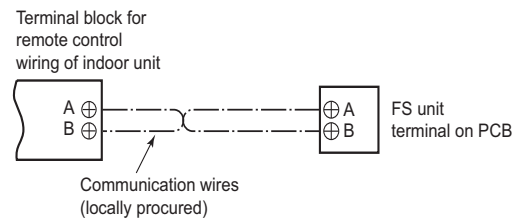

For communication wire, attach the Clamp filter (accessory) as shown in the picture below.

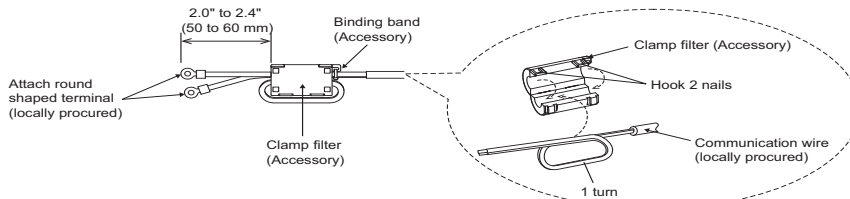

NOTE: Dimensions shown in inches.

SINGLE PORT FLOW SELECTOR (RBM-Y0384FUL) DIMENSIONS

