

VRF Indoor Unit 40VMC007---3 — Compact 4-Way Cassette



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Delivers air in all four directions
- Three Fan Speeds – High, Medium and Low
- Built-in Condensate Lift Mechanism
- Built-in EXV (Electronic Expansion Valve) for Installation Ease

Indoor Unit Model		40VMC007---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	7,000
Heating Rated Capacity	Btu/h	8,000
Airflow (H / M / L)	CFM	306 / 282 / 229
Sound Pressure (H / M / L)	dBA	40.4 / 38.5 / 34.7
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	16
Minimum Circuit Amps	A	0.38
Maximum Overcurrent Protection	A	15
Motor Type		DC



PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Refrigerant		R-410A
Unit Width	in.	24-13/16
Unit Height	in.	10-1/4
Unit Depth	in.	22-7/16
Unit Net Weight	lbs.	40
Panel Width	in.	25-1/2
Panel Height	in.	2
Panel Depth	in.	25-1/2
Panel Net	lbs.	5.5

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900012
- ☐ Wired Remote Controller - Prog. 40VM900013
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligation.

DIMENSIONAL DRAWING INDOOR UNIT COMPACT 4-WAY CASSETTE 40VMC007---3

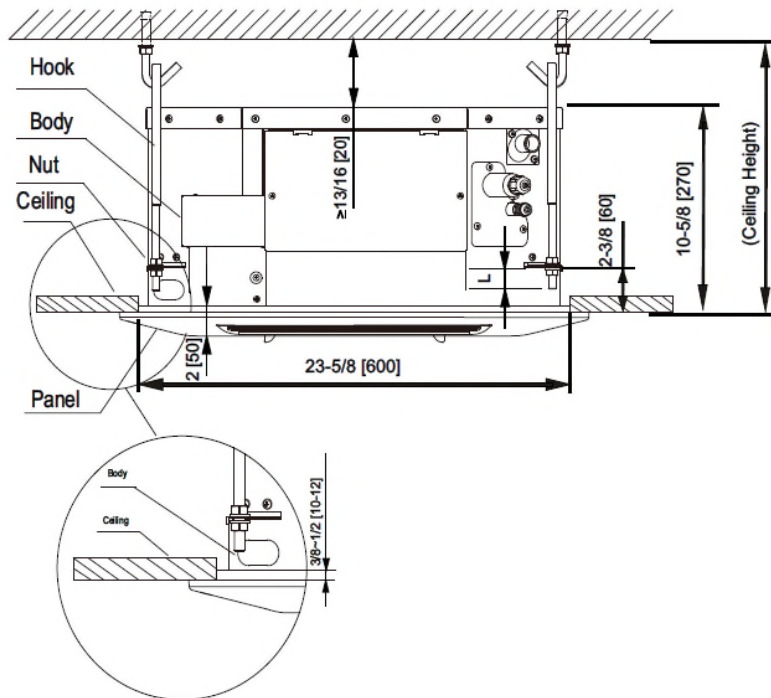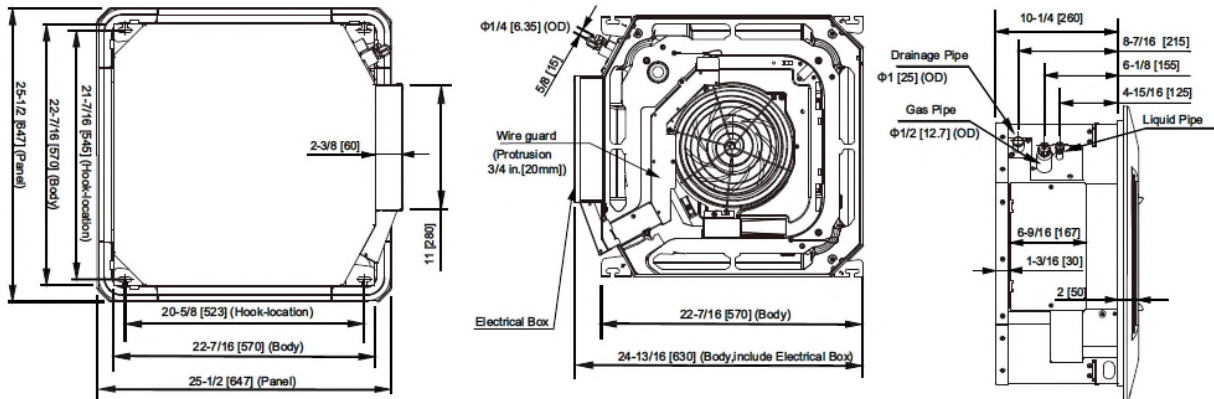

40VMC UNIT SIZE	DIMENSION (in.)
	L
007	1-3/16 ~ 1-1/2

NOTE: All dimensions shown in inches.

