

VRF Indoor Unit 40VMM007A--3—Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built in EXV (Electronic Expansion Valve) for Installation

INDOOR UNIT MODEL		40VMM007A--3	
PERFORMANCE			
Cooling Rated Capacity	Btu/h	7,000	
Heating Rated Capacity	Btu/h	8,000	
Airflow (H / M / L)	CFM	260 / 220 / 220	
Sound Pressure (H / M / L)	dBA	33.2 / 32.1 / 31.8	
ELECTRICAL			
Power Supply	V/Ph/Hz	208-230/1/60	
Indoor Fan Motor Power Consumption (Input)	W	50	
Minimum Circuit Amps (MCA)	A	1.25	
Maximum Overcurrent Protection	A	15	
Motor Type		DC	



PHYSICAL DATA			
Pipe Connection Size - Liquid	in.	1/4 (OD)	
Pipe Connection Size - Suction	in.	1/2 (OD)	
Pipe Connection Size - Drain	in.	3/4 NPT	
Maximum External Static Pressure (ESP)	in. wg	0.32	
Refrigerant		R-410A	
Unit Width	in.	39-1/4	
Unit Height	in.	8-1/4	
Unit Depth	in.	19-3/4	
Net Unit Weight	lb	50.7	

ACCESSORIES


- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING

INDOOR UNIT MEDIUM STATIC DUCT 40VMM007A--3

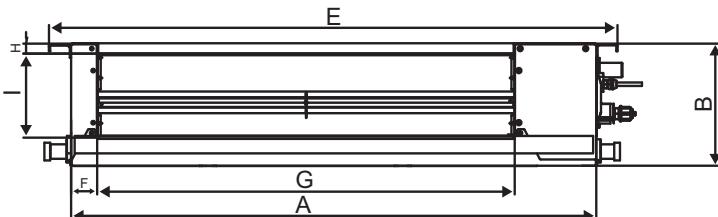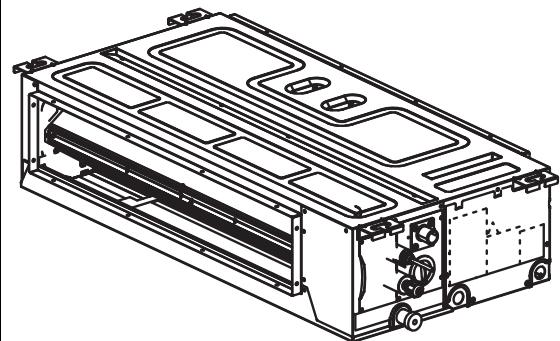


Front View

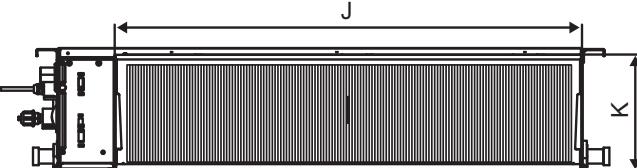


Rear View

Nameplate and other labels




Left Side View




Right Side View

Warning Labels

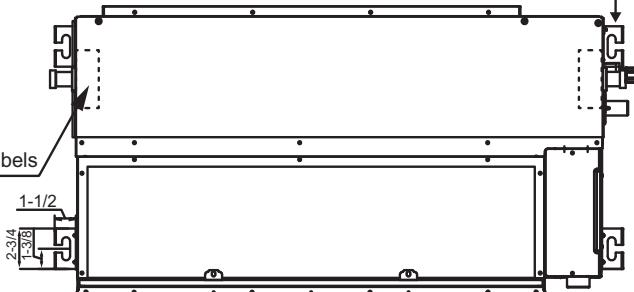

Bottom View

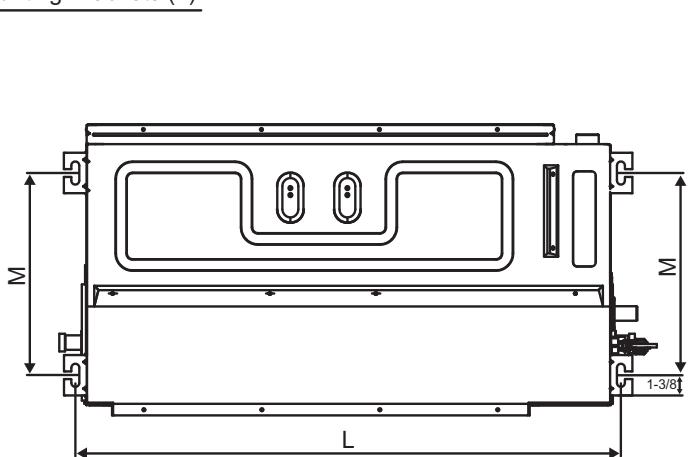

Top View

Note: All dimensions are shown in inches

40VMM UNIT SIZE	DIMENSION (in.)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
007	36 1/4	8 1/4	19 3/4	17 3/4	39 1/4	1 3/4	28 3/4	5/8	5 3/4	32 1/4	7 7/8	37 3/4	13 3/4

