


# VRF Indoor Unit 40VMZ024---3—Reheat Unit



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_

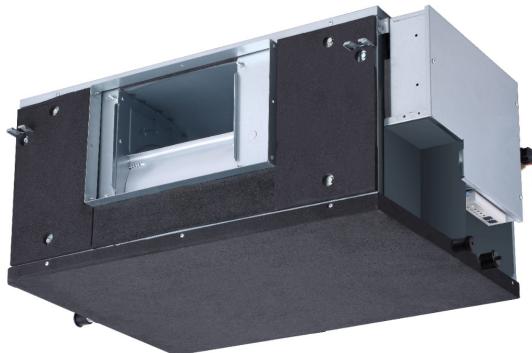

### STANDARD FEATURES

- Ducted Supply and Return Opening
- Three Fan Speeds - High, Medium, and Low
- Built in EXV (Electronic Expansion Valve) for Install Ease


INDOOR UNIT MODEL		40VMZ024---3	
<b>PERFORMANCE</b>			
Heating Rated Capacity	Btu/h	24,000	
Airflow (H / M / L)	CFM	1294 / 1176 / 1029	
Sound Pressure (H / M / L)	dBA	47.7 / 47.0 / 44.5	
<b>ELECTRICAL</b>			
Power Supply	V/Ph/Hz	208-230/1/60	
Indoor Fan Motor Power Consumption (Input)	W	189	
Minimum Circuit Amps (MCA)	A	2.5	
Maximum Overcurrent Protection	A	15.0	
Motor Type		DC	

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Minimum External Static Pressure (ESP) (Factory Default)	in. wg	0.2
Maximum External Static Pressure (ESP)	in. wg	1.0
Refrigerant		R-410A
Unit Width	in.	37-1/2
Unit Height	in.	16-1/2
Unit Depth	in.	27-3/16
Net Unit Weight	lb	112


### ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006


**DIMENSIONAL DRAWING**  
**INDOOR REHEAT UNIT 40VMZ024---3**

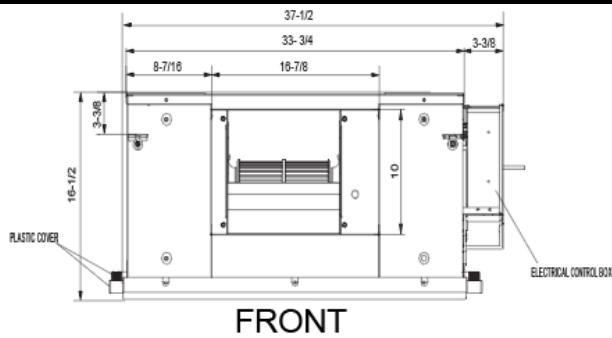


**FRONT**

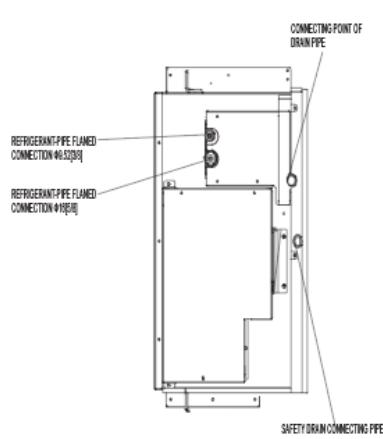


**RIGHT SIDE**

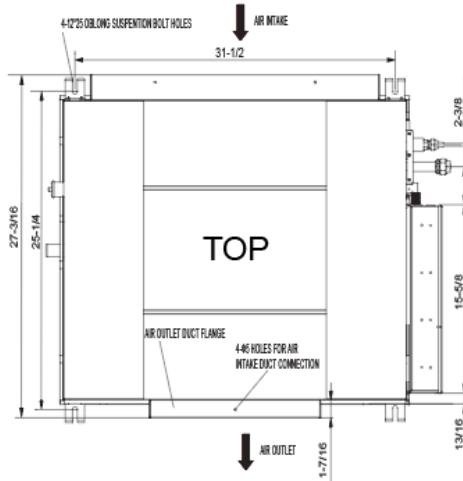

**TOP**

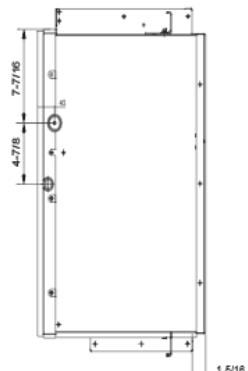

**LEFT SIDE**

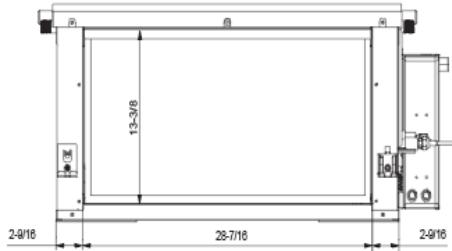

**REAR**

Unit: inches (mm)

**SERVICE CLEARANCE  
INDOOR REHEAT UNIT 40VMZ024---3**

