


# SHRMe RBM-Y0964FUL—Single Port Flow Selector (Long)

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_

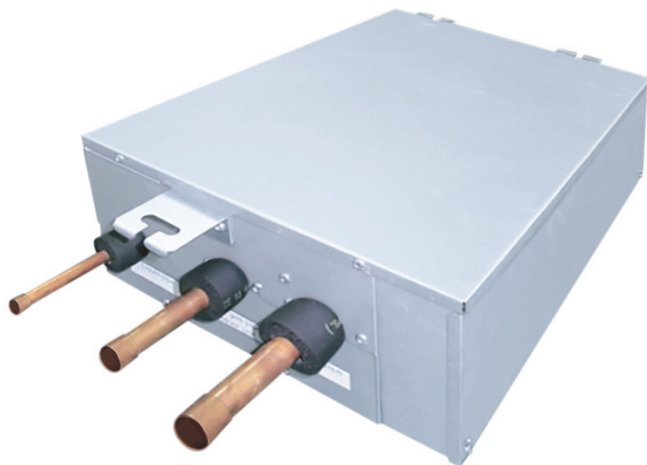

### Single Port Flow Selector Features

- Maximum piping length between port and indoor unit is 164 ft.
- Power and control cable are field supplied and installed.
- Multiple indoor units can be connected to one box.

|                                              |                         |       |
|----------------------------------------------|-------------------------|-------|
| MODEL NAME                                   | RBM-Y0964FUL            |       |
| POWER SUPPLY                                 | 208-230/1/60            |       |
| Current Draw                                 | A                       | <1    |
| MOCP                                         | A                       | 15    |
| Number of Connectable Indoor Units           | 8*                      |       |
| Connectable indoor unit capacity/port        | kBtu/h                  | 61~96 |
| DIMENSIONS                                   | Height (in)             | 7.10  |
|                                              | Width (in)              | 19.50 |
|                                              | Depth (in)              | 13.80 |
| TOTAL WEIGHT                                 | lbs                     | 38    |
| Connecting Port Diameter (Indoor Unit Side)  | Liquid Side (in)        | 1/2   |
|                                              | Gas Side (in)           | 7/8   |
| Connecting Port Diameter (Outdoor Unit Side) | Liquid Side (in)        | 1/2   |
|                                              | Discharge Gas Side (in) | 3/4   |
|                                              | Suction Gas Side (in)   | 7/8   |
| Connection                                   | Braze                   |       |

### LEGEND


**MOCP** — Maximum Over Current Protection

\* If using 2 remote controllers, maximum connectable indoor units is 7.


Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

## SINGLE PORT FLOW SELECTOR CLEARANCE (RBM-Y0964FUL)

### Installation space

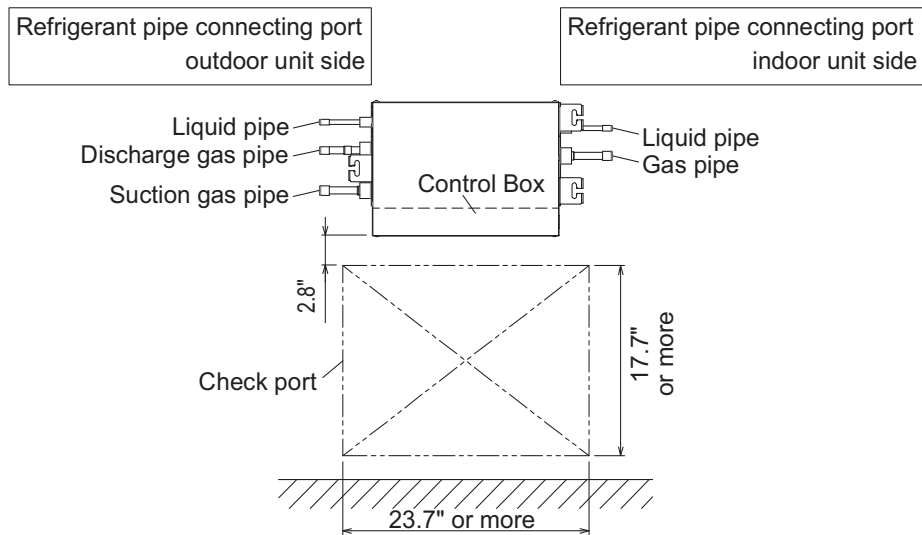


### When attached pipes are used

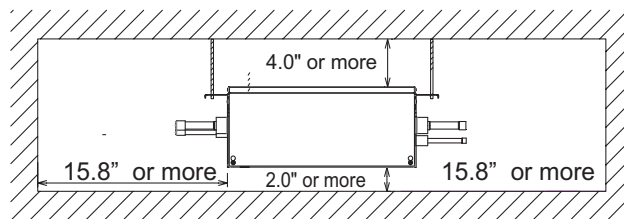


NOTE: Dimensions shown in inches.


## SINGLE PORT FLOW SELECTOR (RBM-Y0964FUL) WIRING DIAGRAM

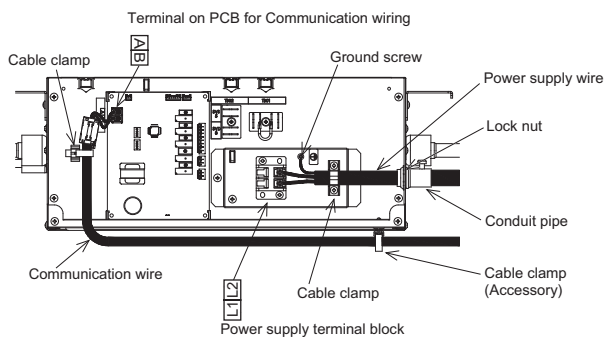

### Communication Wiring

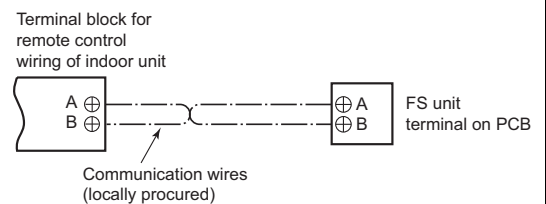


For communication wire, attach the Clamp filter (accessory) as shown in the picture below.

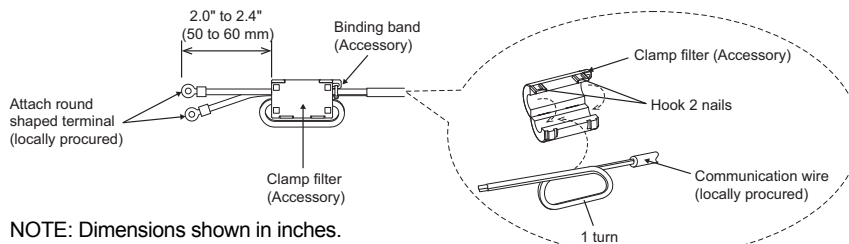

NOTE: Dimensions shown in inches.

# SINGLE PORT FLOW SELECTOR (RBM-Y0964FUL) DIMENSIONS

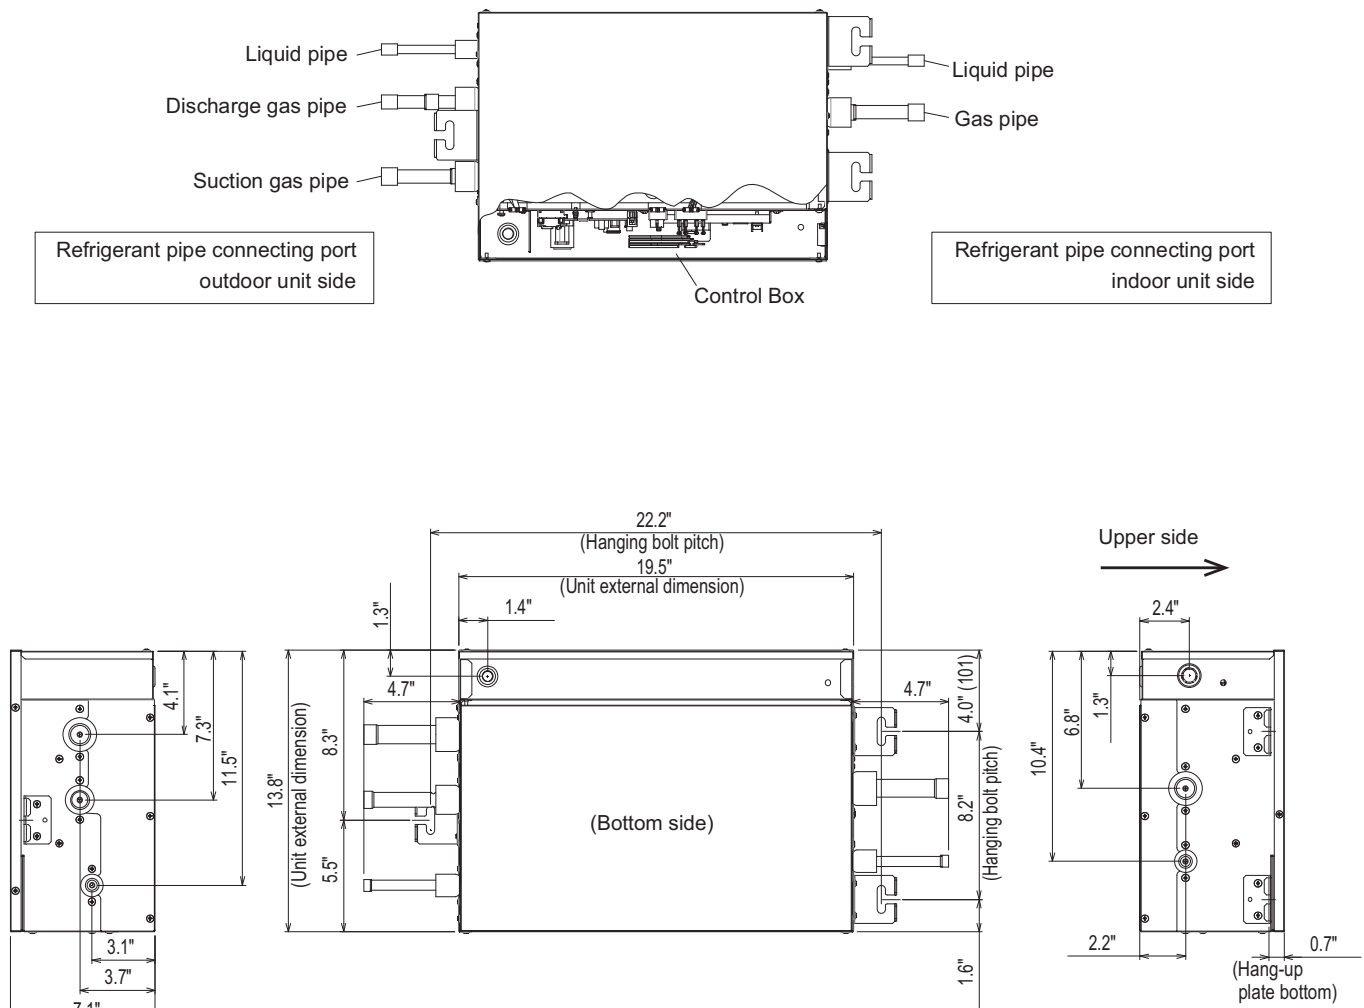

NOTE: Dimensions shown in inches.

