

# VRF Outdoor Unit 38VMA216RDS6-1 - Heat Recovery



## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### Heat Recovery Features

- Modules available from 6 to 28 tons
- Modules have inverter-driven scroll compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3280 ft (1000 m) actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Up to 3937 ft (1200 m) control wiring between the outdoor units and indoor units
- Operating temperature range  
 Cooling (db): 5° to 125°F  
 (-15° to 52°C)  
 Heating (wb): -13° to 64°F  
 (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Header Model	38VMA216RDS6-1	
<b>PERFORMANCE</b>		
Nominal Cooling Capacity	Btu/h	214,200
Nominal Heating Capacity	Btu/h	243,000
Maximum Total Connected Indoor Unit Capacity		50% to 150%
<b>SIMULTANEOUS COOLING AND HEATING EFFICIENCY†</b>		
SCHE, Ducted FCUs		26.50
SCHE, Ductless FCUs		27.30
<b>COOLING EFFICIENCY†</b>		
EER/IEER, Ducted FCUs	Btu/Wh	11.00/21.70
Power Consumption, Ducted FCUs	kW	17.90
EER/IEER, Ductless FCUs	Btu/Wh	11.20/23.00
Power Consumption, Ductless FCUs	kW	16.80
<b>HEATING EFFICIENCY†</b>		
COP at 47°F, Ducted FCUs		3.29
Power Consumption, Ducted FCUs	kW	19.10
COP at 47°F, Ductless FCUs		3.34
Power Consumption, Ductless FCUs	kW	18.00
Fan Type (Qty)		Propeller (2)
Airflow, Standard Range	CFM	12,300
Sound Pressure	dBA	67.10
External Static Pressure*	in. wg	0.24

ELECTRICAL		
Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)		38
Recommended Fuse Size		40
<b>COMPRESSORS</b>		
Type (Number)		Inverter Hermetic Scroll (2)
<b>FAN MOTOR</b>		
Motor Type (Steps)		Inverter Direct Driven (13)
Motor Output	kW	2 X 0.44
<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid (High Pressure)	in.	1-1/8 (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	44.2
Unit Width	in.	78-3/8
Unit Height	in.	64-3/8
Unit Depth	in.	31-1/8
Net Weight	lb	1137

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db  
 Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb


\*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

**LEGEND**  
 db — Dry Bulb  
 COP — Coefficient of Performance  
 EER — Energy Efficiency Ratio  
 FCU — Fan Coil Unit  
 IEER — Integrated Energy Efficiency Ratio  
 wb — Wet Bulb  
 SCHE — Simultaneous Cooling and Heating Efficiency

**DIMENSIONAL DRAWING  
OUTDOOR UNIT 38VMA216RDS6-1**

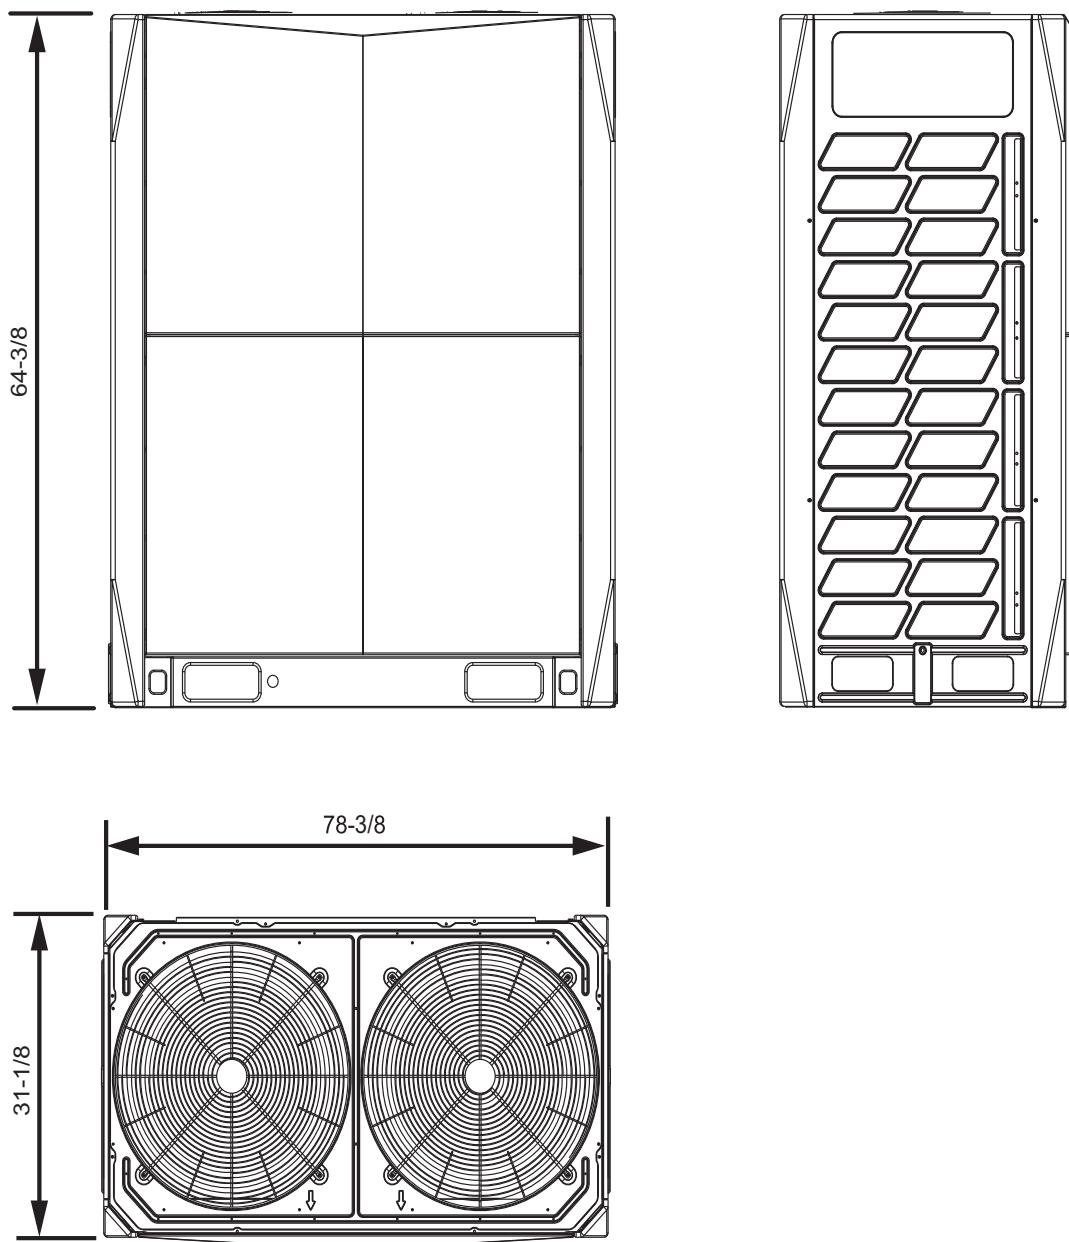

© Carrier Corporation 2018



Printed in U.S.A.

Form 38VMR2166-C-3SD

Pg 2

08-18

Replaces: 38VMR2166-C-2SD

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.