

VRF Indoor Unit 40VMU048---3—Under Ceiling / Floor



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds - High, Medium, and Low
- Louver Control (Fixed or Swing)
- Knockout for Outside Air
- Built-in IR Receiver and Display Panel
- Built in EXV (Electronic Expansion Valve) for Installation Ease


INDOOR UNIT MODEL		40VMU048---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	48,000
Heating Rated Capacity	Btu/h	54,000
Airflow (H / M / L)	CFM	1353 / 1000 / 929
Sound Pressure (H / M / L)	dBA	59.0 / 51.4 / 49.8
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	230
Minimum Circuit Amps (MCA)	A	2.80
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	66
Unit Height	in.	27
Unit Depth	in.	10
Net Unit Weight	lbs.	106

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006


**DIMENSIONAL DRAWING
INDOOR UNIT UNDER CEILING / FLOOR 40VMU048---3**

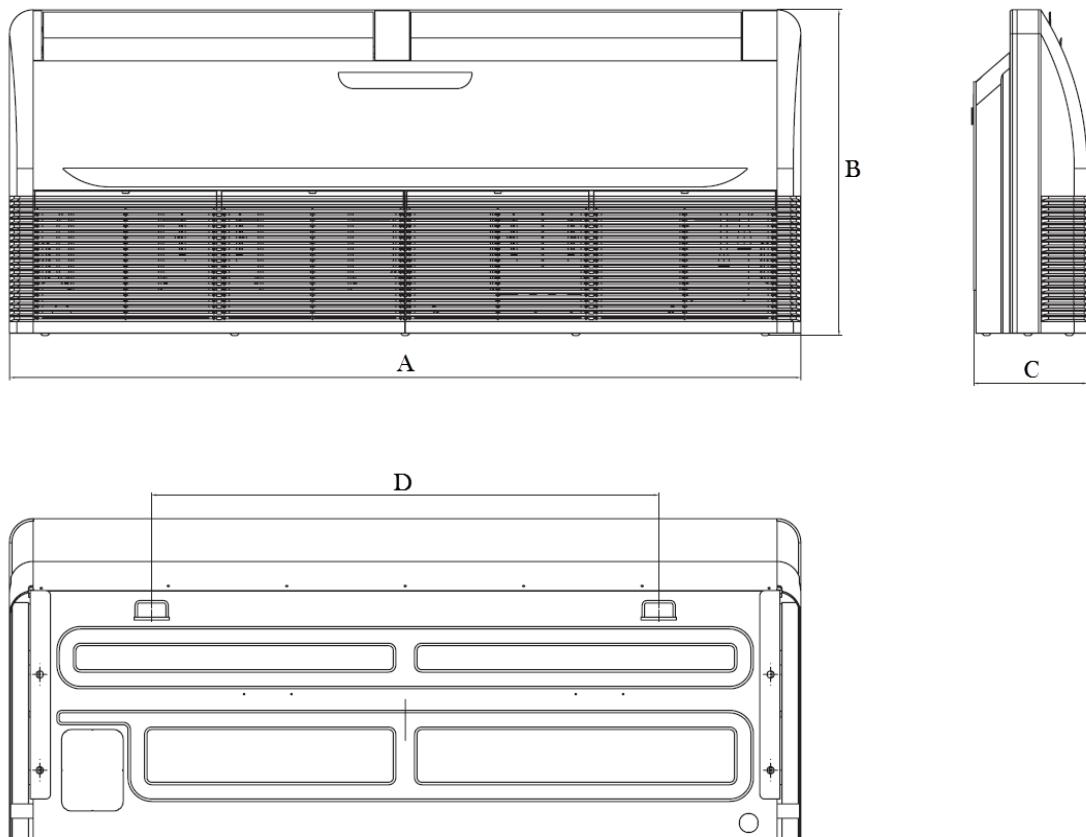

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
048	66	27	10	42-1/8

NOTE: All dimensions shown in inches.

Outside Air Opening Cutout Location

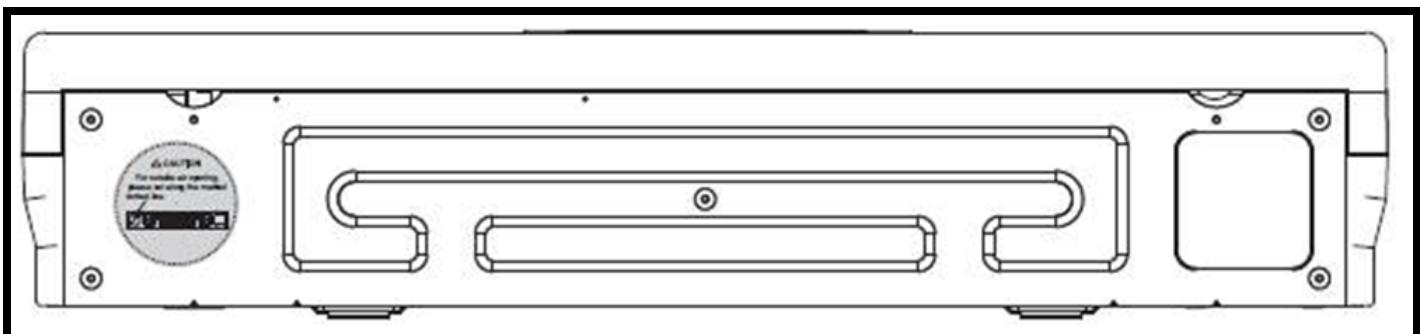

© Carrier Corporation 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
Printed in U.S.A. Form 40VMU048-C-2SD Pg 2 06-18 Replaces: 40VMU048-C-1SD