

CODE

CATALOG #



THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.


**BASE UNIT SIZE 2 AND 4
HOT WATER COILS
1 & 2 ROW**

45R


45R Unit Sizes 2 and 4

Hot Water Coils - 1 Row and 2 Row


SUBMITTAL SHEET

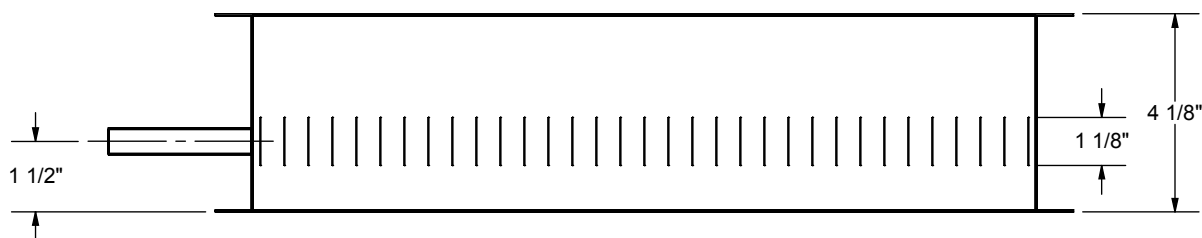

**1 ROW HOT WATER COIL
TOP VIEW**

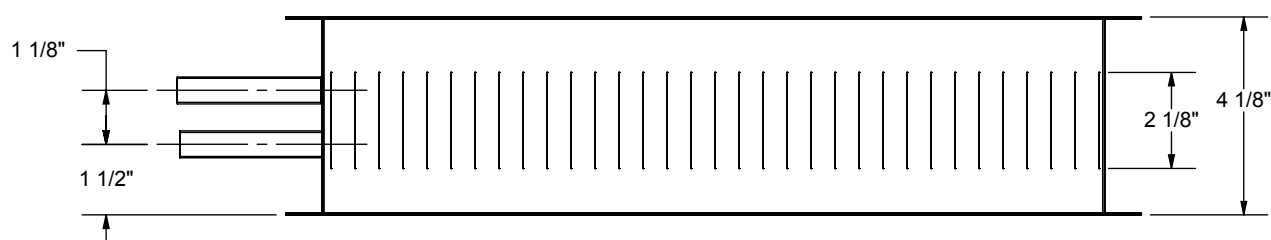

**2 ROW HOT WATER COIL
TOP VIEW**

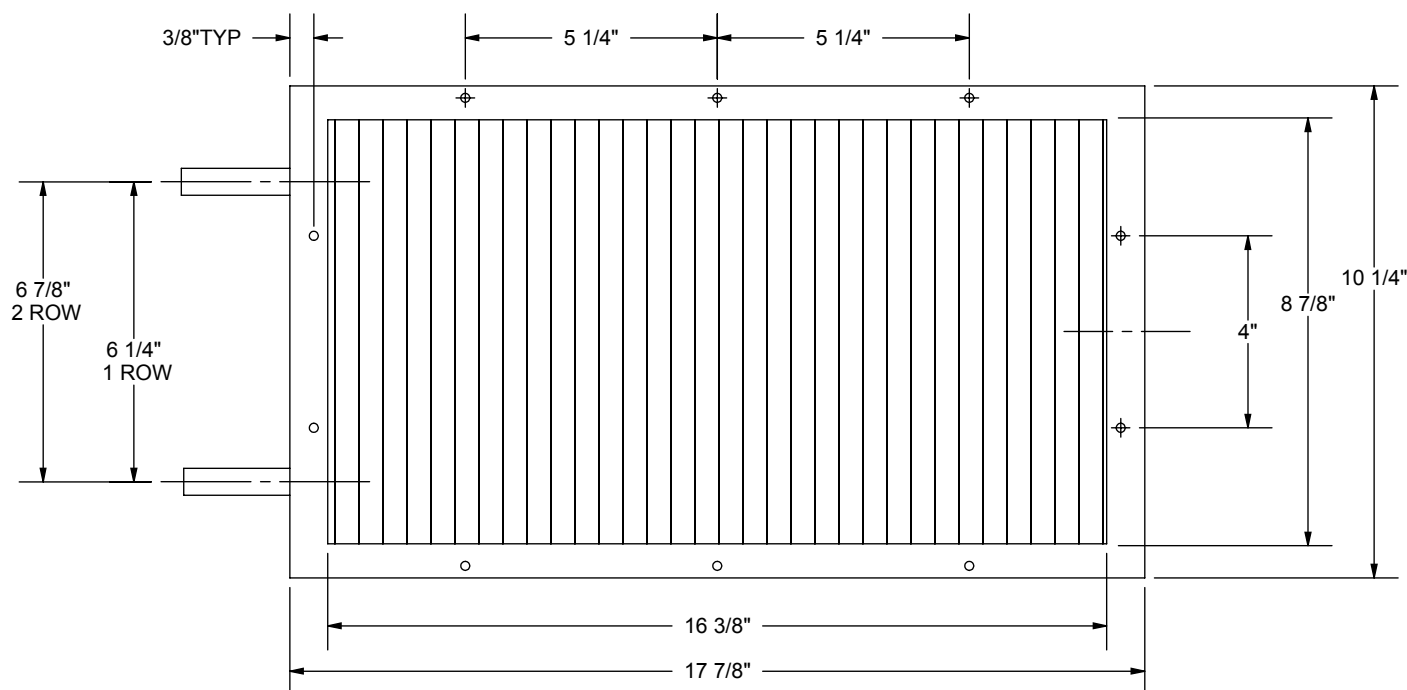

INLET VIEW

STANDARD FEATURES:

- Connection Tubing - 0.50" O.D. Male Fitting.
- Coil Casing - 20 Ga. Galvanized Steel.
- Coil Tubing - 0.50" Diameter x 0.016" Thick Copper.
- Coil Fins - 0.0045" Thick Aluminum, 10 per Inch Mechanically Bonded to Tubing.
- Coils are Leak Tested to 400 psi.
- Coils are Not for Steam Applications.

JOB NAME

JOB NUMBER

LOCATION

DRAWING NUMBER

BUYER

BUYER #

REVISION

B

SHEET

1 OF 1**45R-203-1**