

# VRF Indoor Unit 40VMU012---3—Under Ceiling / Floor



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds - High, Medium, and Low
- Louver Control (Fixed or Swing)
- Built-in IR Receiver and Display Panel
- Built in EXV (Electronic Expansion Valve) for Installation Ease


INDOOR UNIT MODEL		40VMU012---3	
<strong>PERFORMANCE</strong>			
Cooling Rated Capacity	Btu/h	12,000	
Heating Rated Capacity	Btu/h	13,500	
Airflow (H / M / L)	CFM	335 / 294 / 259	
Sound Pressure (H / M / L)	dBA	37.7 / 35.7 / 33.9	
<strong>ELECTRICAL</strong>			
Power Supply	V/Ph/Hz	208-230/1/60	
Indoor Fan Motor Power Consumption (Input)	W	24	
Minimum Circuit Amps (MCA)	A	0.44	
Maximum Overcurrent Protection	A	15	
Motor Type		DC	

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	39
Unit Height	in.	8
Unit Depth	in.	26
Net Unit Weight	lb	57

### ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

**DIMENSIONAL DRAWING  
INDOOR UNIT UNDER CEILING / FLOOR 40VMU012---3**

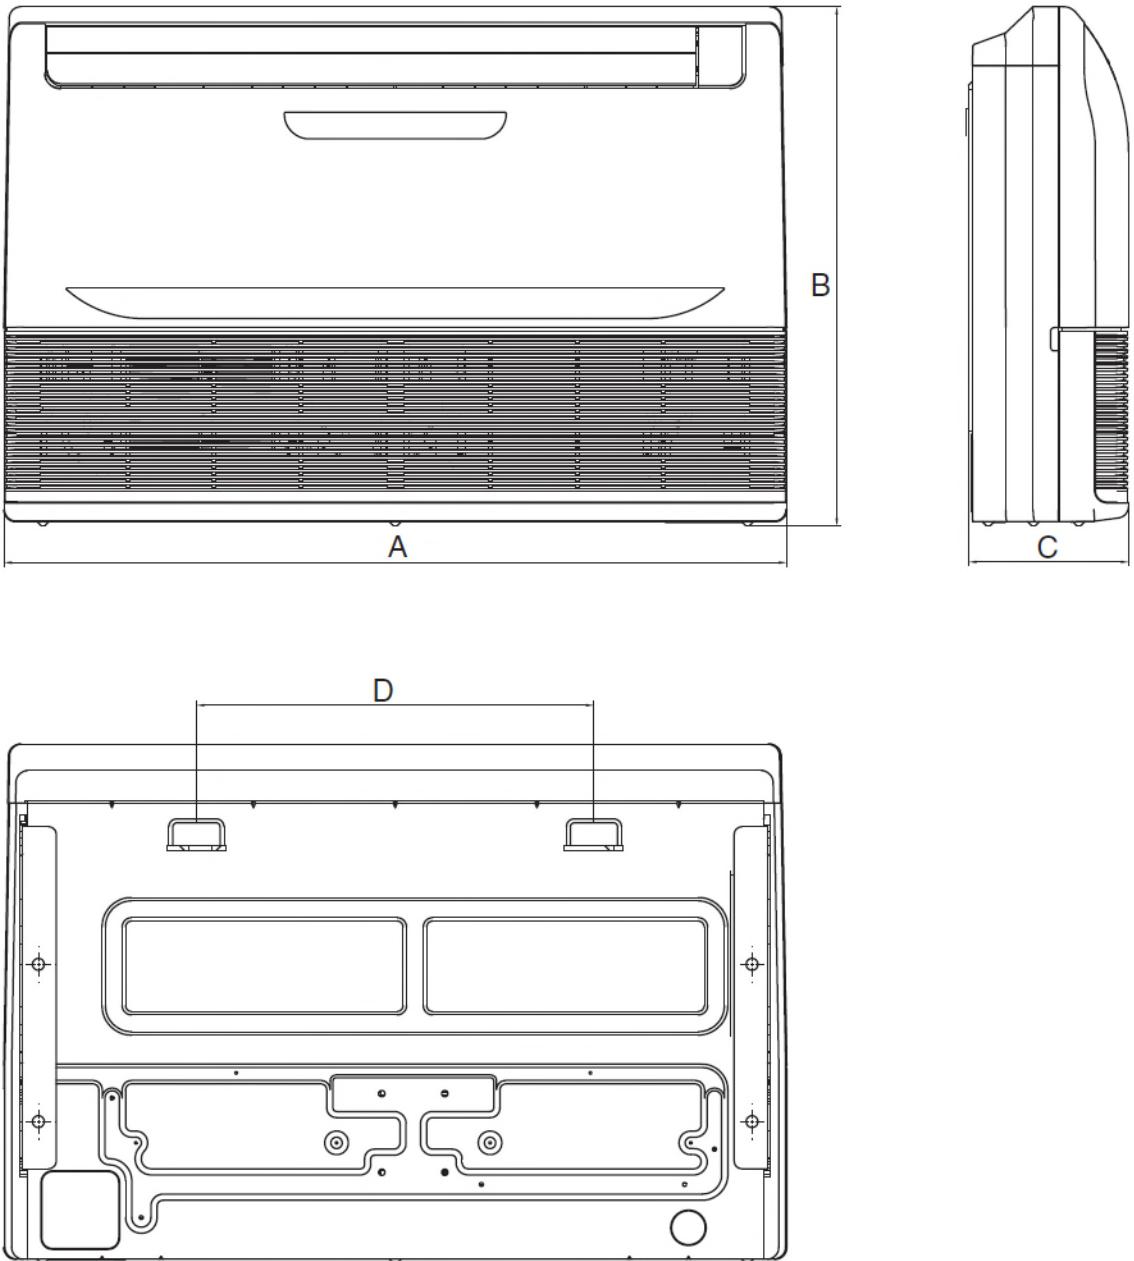

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
012	39	26	8	19-7/8

NOTE: All dimensions shown in inches.

