


VRF Indoor Unit 40VMV030---3 — Vertical AHU



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____

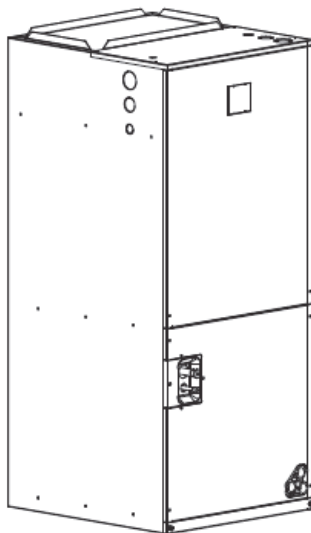

STANDARD FEATURES

- Dual Drainage Spouts
- Three Fan Speeds - High, Medium and Low
- Unit can be Installed Standing Vertically or Laid Horizontally
- DC Fan Motor
- Built in EXV (Electronic Expansion Valve) for Installation Ease
- Removable Front Panel Provides Easy Access

Indoor Unit Model		40VMV030---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	30,000
Heating Rated Capacity	Btu/h	34,000
Airflow (H / M / L)	CFM	1000 / 850 / 700
Sound Pressure (H / M / L)	dBA	52.2 / 48.4 / 44.4
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Motor Type		DC
Indoor Unit Fan Motor Power Consumption (Input)	W	151
Minimum Circuit Amps	A	3.8
Maximum Overcurrent Protection	A	15


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	3/4 (NPT)
Refrigerant		R-410A
Unit Width	in.	19-5/8
Unit Height	in.	46-1/2
Unit Depth	in.	21-5/8
Net Weight	lb	123

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING INDOOR UNIT VERTICAL AHU 40VMV030---3

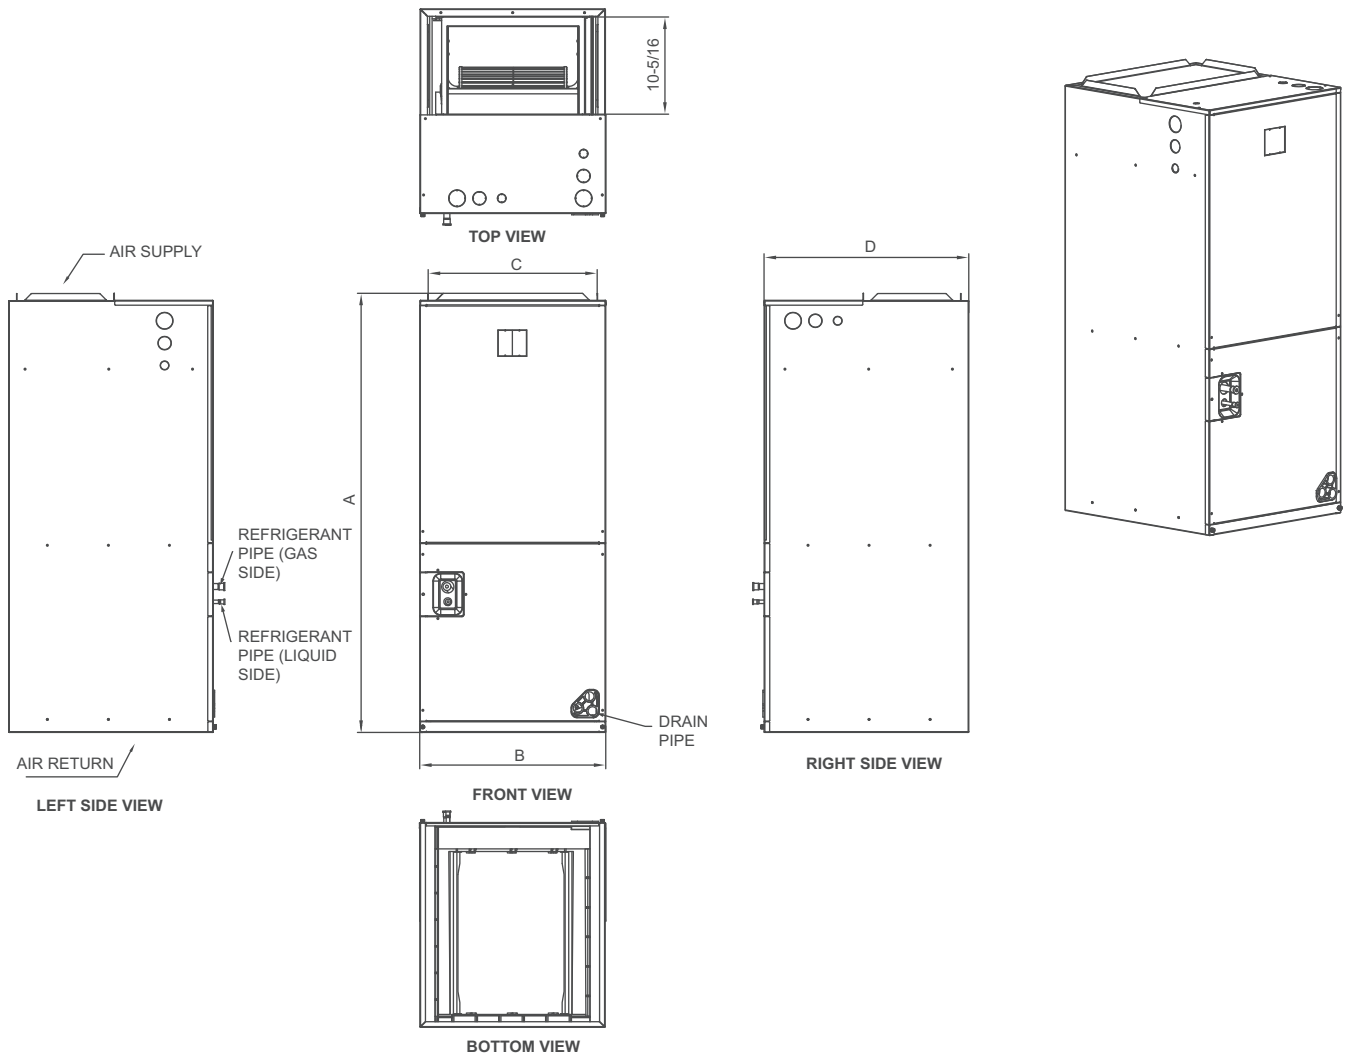

40VMV UNIT SIZE	DIMENSION			
	A	B	C	D
030	46-1/2	19-5/8	18	21-5/8

NOTE: All dimensions shown in inches.

