

CODE

CATALOG #




THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.

**HOT WATER
COILS 2 ROW
WITH ACCESS**

45J/M

HOT WATER COILS w/ ACCESS DOORS - 2 ROW

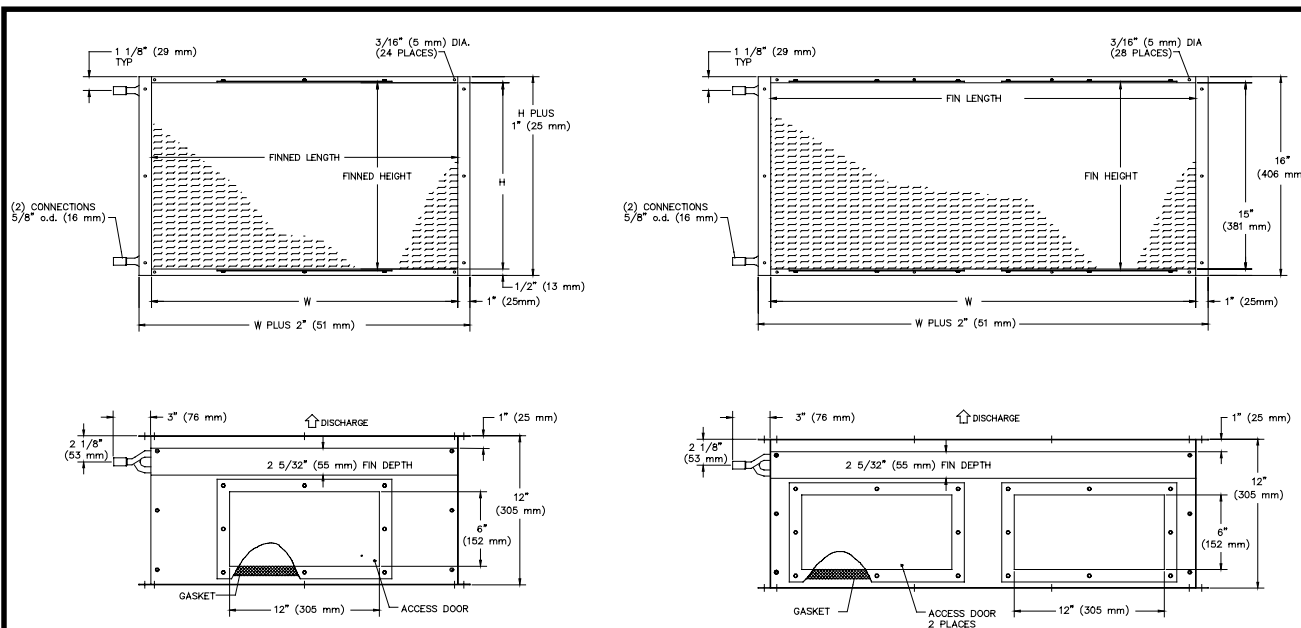

CONSTRUCTION TYPICAL OF UNIT SIZES 2 - 6

45J UNIT SIZE 7

MODEL	UNIT SIZE	W	H
45J 2 ROW	2	15" (381 mm)	12 1/2" (318 mm)
	3	15" (381 mm)	12 1/2" (318 mm)
	4	22" (559 mm)	12 1/2" (318 mm)
	5	22" (559 mm)	15" (381 mm)
	6	24 1/2" (622 mm)	15" (381 mm)
	7	34" (864 mm)	15" (381 mm)
45M 2 ROW	2	15" (381 mm)	12 1/2" (318 mm)
	3	15" (381 mm)	12 1/2" (318 mm)
	4	22" (559 mm)	12 1/2" (318 mm)
	5	22" (559 mm)	15" (381 mm)
	6	24 1/2" (622 mm)	15" (381 mm)
	7	24 1/2" (622 mm)	15" (381 mm)

STANDARD FEATURES:

- Connection Tubing - .63" diameter male fitting.
- Coil Casing - 20 Ga. Galvanized steel.
- Coil Tubing - .50" diameter x .017" thick copper.
- Coil Fins - .0045" thick aluminum, 10 per inch, mechanically bonded to tubing.
- Coils are leak tested to 400 psi
- Coils are not for steam applications.

OPTIONS:

- ☐ Coils are available with a vent and drain

NOTE: Dimensions are given in inches and (mm)

JOB NAME

JOB NUMBER

LOCATION

DRAWING NUMBER

BUYER

BUYER #

REVISION
BSHEET
1 OF 1

45J/M-203-4