




THIS DOCUMENT IS THE PROPERTY  
OF CARRIER CORPORATION AND IS  
DELIVERED UPON THE EXPRESS  
CONDITION THAT THE CONTENTS  
WILL NOT BE DISCLOSED OR USED  
WITHOUT CARRIER CORPORATION'S  
WRITTEN CONSENT.

SUBMISSION OF THESE  
DRAWINGS OR DOCU-  
MENTS DOES NOT  
CONSTITUTE PART PER-  
FORMANCE OR ACCEP-  
TANCE OF CONTRACT.


**DOAS UNIT SIZE 1 AND 2  
SENSIBLE COOLING COIL  
2 ROW, 4 ROW, & 6 ROW**

**45Q**

| MODEL | Number of Rows | A      | B      |
|-------|----------------|--------|--------|
| 45Q   | 2              | 7 7/8" | 2 1/8" |
|       | 4              | 7 7/8" | 4 3/8" |
|       | 6              | 10"    | 6 1/2" |

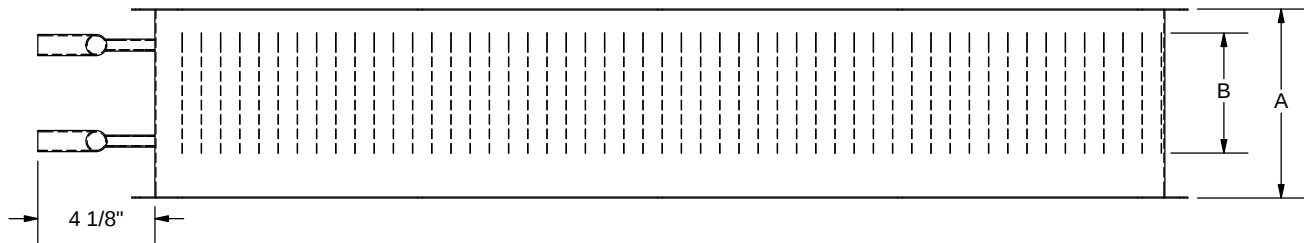

### TOP VIEW

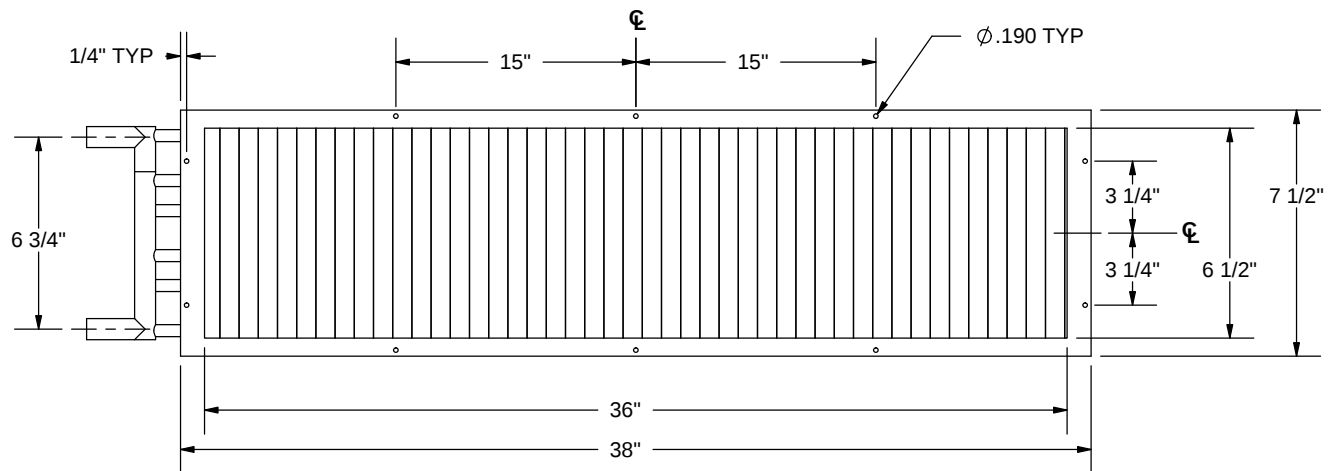

### INLET VIEW

## STANDARD FEATURES:

- Connection Tubing - 0.875" O.D. Male Fitting
- Coil Casing with Weep Holes- 20 Ga. Galvanized Steel
- Coil Tubing - 0.50" Diameter x 0.016" Thick Copper
- Coil Fins - 0.0045" Thick Aluminum, 10 per Inch Mechanically Bonded to Tubing
- Coils are Leak Tested to 400 psi.

NOTE: Entering Water Temperature Must be Above Dew Point to Prevent Condensation on Coil.  
Typical Design Entering Water Temperature for Cooling Coil Ranges 55°F to 60°F.

|          |            |                      |                        |                                         |
|----------|------------|----------------------|------------------------|-----------------------------------------|
| JOB NAME | JOB NUMBER | LOCATION             |                        | DRAWING NUMBER<br><br><b>45Q-202-31</b> |
| BUYER    | BUYER #    | REVISION<br><b>B</b> | SHEET<br><b>1 OF 1</b> |                                         |