


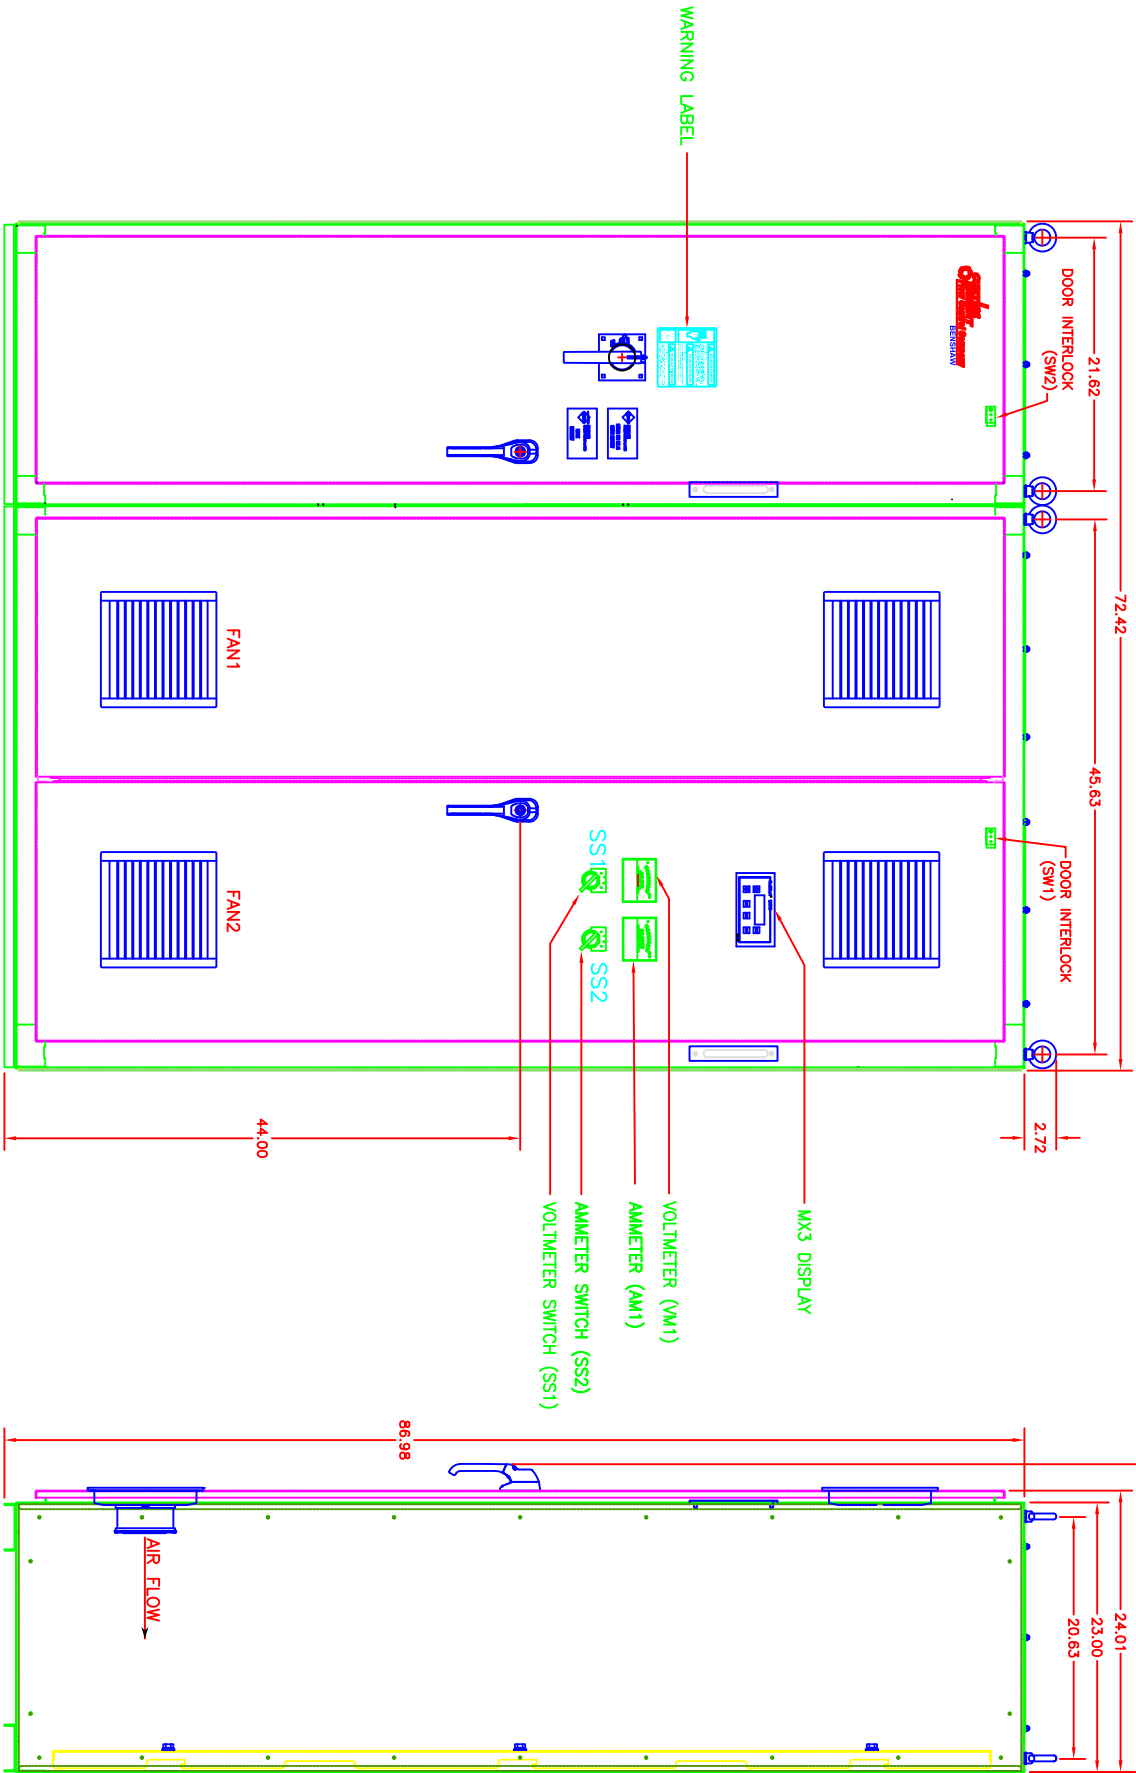

BENSHAW (SOLID STATE)		
STARTER	CIRCUIT BREAKER	
RLA	LUG CAPACITY (PER PHASE)	
# CONDUCTORS	CONDUCTOR RANGE	
741-1190	5	300-600 MCM.

NOTES:

- △ FREE STANDING FLOOR MOUNTED ENCLOSURE LAG BOLTED TO CONCRETE FLOOR RECOMMENDED.
- △ ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
- △ APPROXIMATE WEIGHT= 1000lbs.
- △ ENCLOSURE RATING=NEMA TYPE 12
- △ ENSURE LEFT DOOR IS HELD CLOSED BY RIGHT DOOR.

REVISIONS			
DO NOT SCALE DWG	THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES DECIMALS AND FRACTIONS PER ASME Y14.5M-1994	SIGNATURES
THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN, IS THE PROPERTY OF BENSHAW INC., AND ANY REUSE OR REPRODUCTION OF THIS DRAWING WITHOUT THE EXPRESS WRITTEN PERMISSION OF BENSHAW INC. IS PROHIBITED. IT IS PROVIDED SOLELY FOR THE CONVENIENCE OF THE USER AND SHALL BE RETURNED UPON REQUEST.		TOLERANCES: .XXX ± .02 ANGLES ± 1°	DATE
TITLE:		DRWN. BDA 2/22/12	CHKD.
ENCLOSURE OUTLINE		ENG. JAF 2/22/12	MFG.
SOLID STATE STARTER C74FSS1194A4601 CARRIER BSS/GLOBAL		SIZE DWG NO. D S201201231A-00	
PO. NO. 8600043568		BENSHAW 615 ALPHA DRIVE PITTSBURGH, PA 15236	
SCALE: NTS		SHEET 3 OF 4	