

VRF Indoor Unit 40VMR007---3—Floor Console



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Complete Hideaway Unit
- Three Fan Speeds - High, Medium, and Low
- Adjustable Filter Rack - up to 2"
- Max External Static Pressure (ESP) up to 0.15"
- Built in EXV (Electronic Expansion Valve) for Installation Ease

INDOOR UNIT MODEL		40VMR007---3	
PERFORMANCE			
Cooling Rated Capacity	Btu/h	7,000	
Heating Rated Capacity	Btu/h	8,000	
Airflow (H / M / L)	CFM	300 / 276 / 253	
Sound Pressure (H / M / L)	dBA	39.7 / 38.2 / 35.3	
ELECTRICAL			
Power Supply	V/Ph/Hz	208-230/1/60	
Power Consumption (Input)	W	19	
Minimum Circuit Amps (MCA)	A	0.55	
Maximum Overcurrent Protection	A	15.0	
Motor Type		DC	


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	35-1/4
Unit Height	in.	24
Unit Depth	in.	8-3/8
Net Unit Weight	lb	48.9

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING

INDOOR UNIT FLOOR CONSOLE RECESSED 40VMR007---3

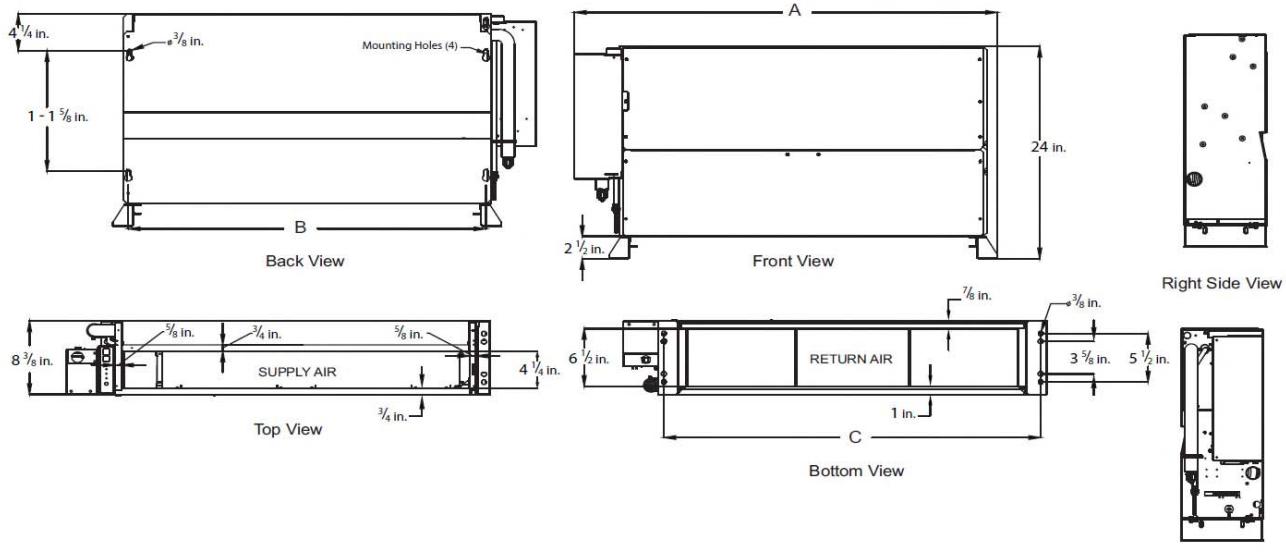

Left Side View

40VMR UNIT SIZE	DIMENSION (in.)		
	A	B	C
007	35-1/4	28-9/16	30-1/2

NOTE: All dimensions shown in inches.



© Carrier Corporation 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
 Printed in U.S.A. Form 40VMR007-C-2SD Pg 2 04-18 Replaces: 40VMR007-C-1SD