


Submittal Data

Job Name _____

Location _____

Tag _____

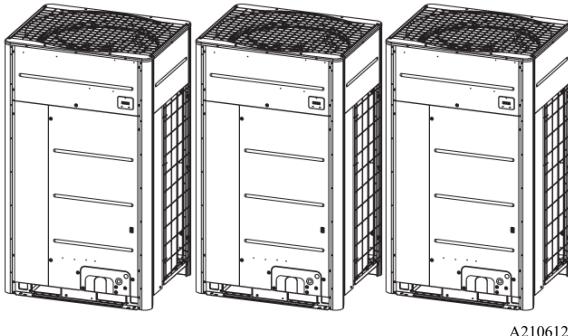

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range
 Cooling (db): -10° to 125°F
 (-15° to 52°C)
 Heating (wb): -22° to 60°F
 (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	MMY-UP3601FT6P-UL	
Header Unit Model	MUP1681FT6P-UL	
Follower Unit Model	MUP0961FT6P-UL	
Follower Unit Model	MUP0961FT6P-UL	
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	360,000
Nominal Heating Capacity	Btu/h	405,000
Maximum Number of Indoor Units		64
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†		
SCHE, Ducted FCUs		25.0
SCHE, Ductless FCUs		25.7
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	10.3/19.6
Power Consumption, Ducted FCUs	kW	30.17
EER/IEER, Ductless FCUs	Btu/Wh	10.6/20.5
Power Consumption, Ductless FCUs	kW	31.44
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.24
Power Consumption, Ducted FCUs	kW	31.88
COP at 47°F, Ductless FCUs		3.54
Power Consumption, Ductless FCUs	kW	31.14
Fan Type (Qty)		Propeller (4)
Airflow, Standard Range	CFM	8476 + (6357 x 2)
Sound Pressure	dBA	66.5
External Static Pressure*	in. wg	0.321

ELECTRICAL		
Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)	A	27.4 + (17.5 x 2)
Maximum Overcurrent Protection (MOCP)	A	40 + (20 x 2)
COMPRESSORS		
Type (Number)		Hermetic Triple Rotary (1) + Hermetic Twin Rotary (2)
FAN MOTOR		
Motor Output	kW	(0.48 x 2) + (0.66 x 2)
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	5/8 + (1/2 x 2) (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 + (7/8 x 2) (Brazed)
Discharge - Gas (High/Low Pressure)		7/8 + (3/4 x 2) (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	19.8 + (13.2 x 2)
Unit Width	in.	51-1/2 + (39-1/2 x 2)
Unit Height	in.	66-1/2 x 3
Unit Depth	in.	31-1/4 x 3
Net Weight	lb	776 + (552 x 2)

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
 Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb
SCHE	— Simultaneous Cooling and Heating Efficiency

DIMENSIONAL DRAWING

OUTDOOR UNIT MMY-UP3601FT6P-UL

