

VRF Indoor Unit 40VMR018---3 — Floor Console Recessed



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Complete Hideaway Unit
- Three Fan Speeds – High, Medium and Low
- Adjustable Filter Rack – up to 2"
- Max External Static Pressure (ESP) up to 0.15"
- Built-in EXV (Electronic Expansion Valve) for Installation Ease

Indoor Unit Model		40VMR018---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	20,000
Airflow (H / M / L)	CFM	488 / 418 / 365
Sound Pressure (H / M / L)	dBA	38.9 / 34.8 / 32.6
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	27
Minimum Circuit Amps	A	0.72
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	54-15/16
Unit Height	in.	24
Unit Depth	in.	8-3/8
Unit Net Weight	lbs.	69.2

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Centralized Controller 40VM900004
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING

INDOOR UNIT FLOOR CONSOLE RECESSED 40VMR018---3

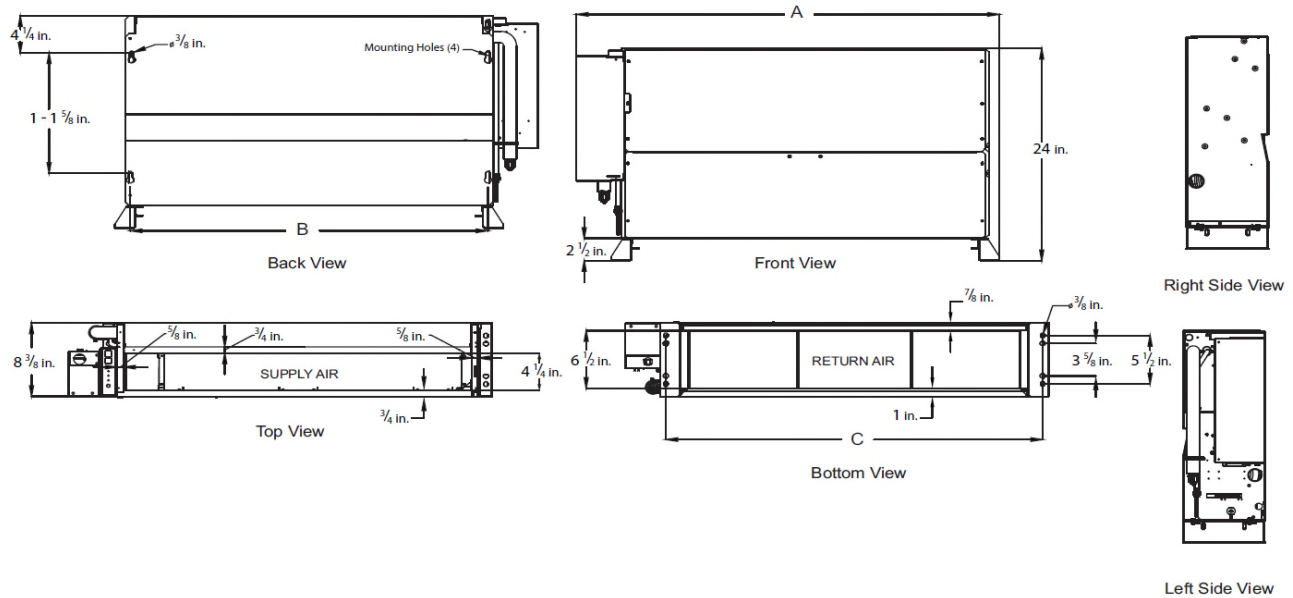

40VMR UNIT SIZE	DIMENSION (in.)		
	A	B	C
018	54-15/16	48-1/4	50-3/16

NOTE: All dimensions shown in inches.

