

VRF Indoor Unit 40VMU015---3—Under Ceiling / Floor



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds - High, Medium, and Low
- Louver Control (Fixed or Swing)
- Built-in IR Receiver and Display Panel
- Built in EXV (Electronic Expansion Valve) for Installation Ease

INDOOR UNIT MODEL		40VMU015---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	15,000
Heating Rated Capacity	Btu/h	17,000
Airflow (H / M / L)	CFM	441 / 412 / 359
Sound Pressure (H / M / L)	dBA	45.2 / 43.6 / 40.2
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	47
Minimum Circuit Amps (MCA)	A	0.73
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	39
Unit Height	in.	26
Unit Depth	in.	8
Net Unit Weight	lb	62

ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING INDOOR UNIT UNDER CEILING / FLOOR 40VMU015---3

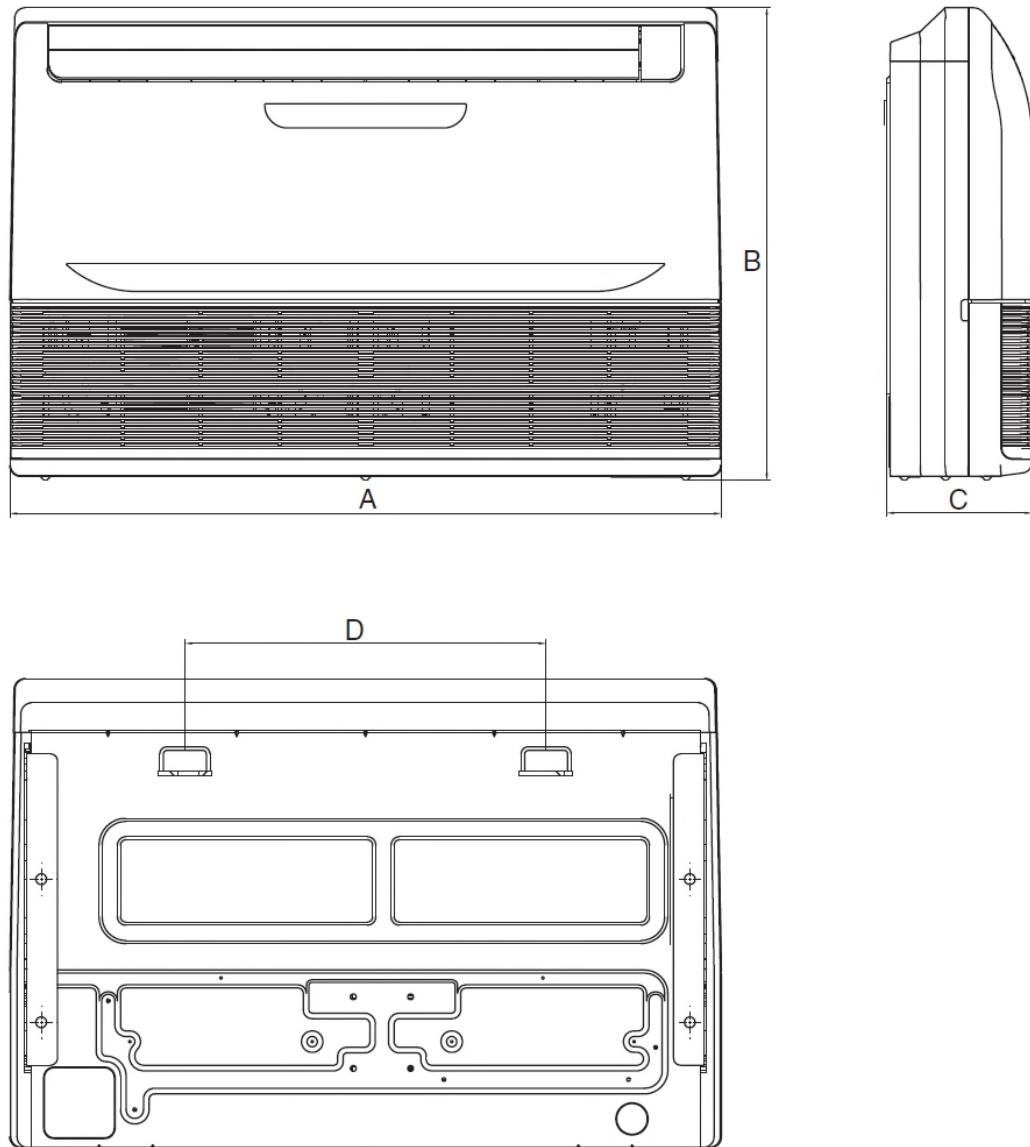

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
015	39	26	8	19-7/8

NOTE: All dimensions shown in inches.



© Carrier Corporation 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Printed in U.S.A.

Form 40VMU015-C-2SD

Pg 2

06-18

Replaces: 40VMU015-C-1SD