

VRF Indoor Unit 40VMU018---3—Under Ceiling / Floor



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds - High, Medium, and Low
- Louver Control (Fixed or Swing)
- Built-in IR Receiver and Display Panel
- Built in EXV (Electronic Expansion Valve) for Installation Ease

INDOOR UNIT MODEL		40VMU018---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	21,000
Airflow (H / M / L)	CFM	471 / 424 / 394
Sound Pressure (H / M / L)	dBA	46.3 / 44.2 / 42.3
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	53
Minimum Circuit Amps (MCA)	A	0.87
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	39
Unit Height	in.	26
Unit Depth	in.	8
Net Unit Weight	lbs.	62

ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING **INDOOR UNIT UNDER CEILING / FLOOR 40VMU018---3**

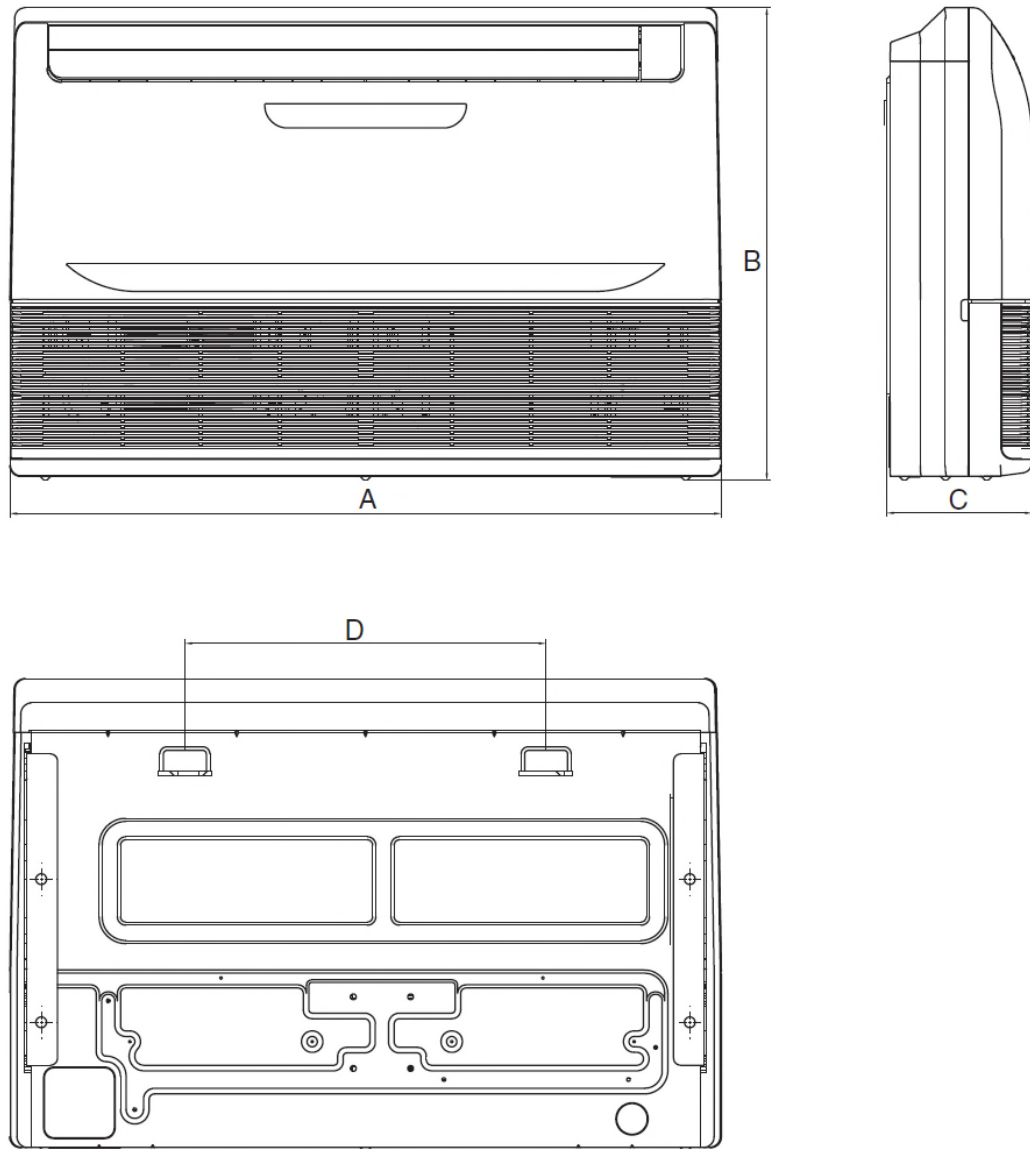

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
018	39	26	8	19-7/8

NOTE: All dimensions shown in inches.

