




S201300454-01
TON DWG

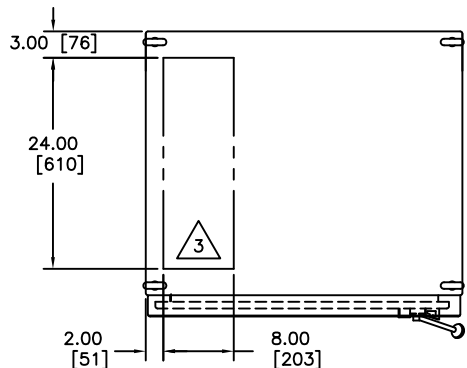


TOP VIEW

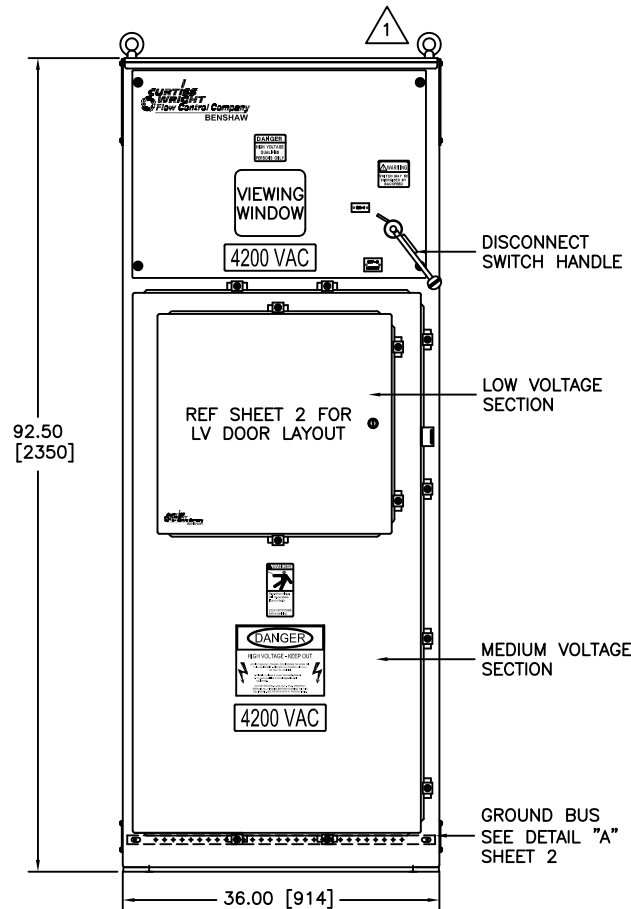


FRONT VIEW

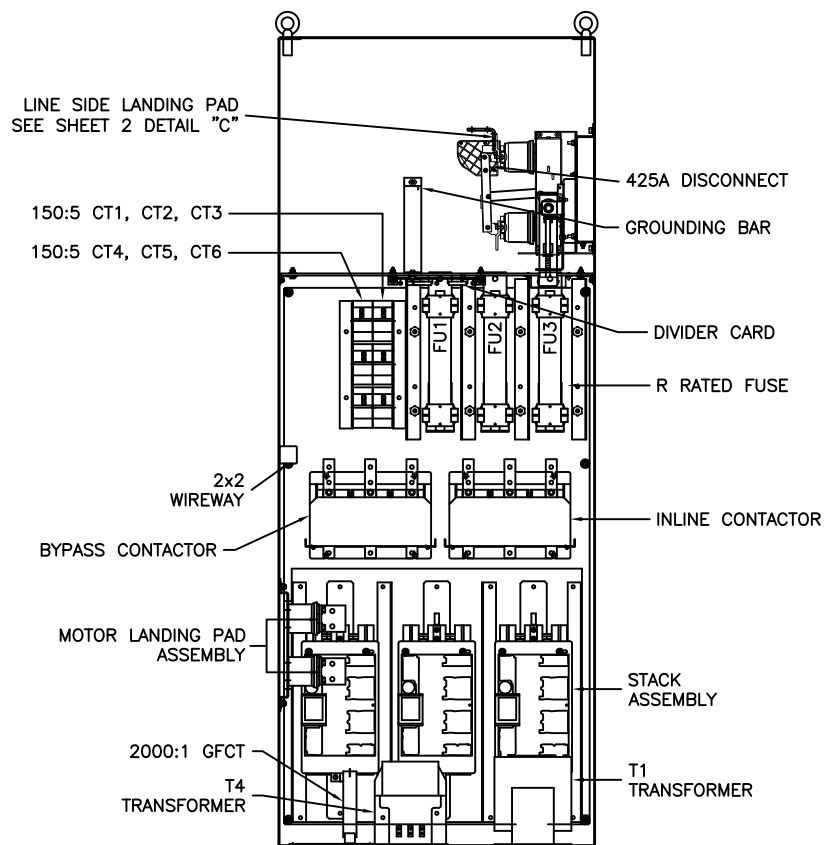

FRONT INTERIOR VIEW

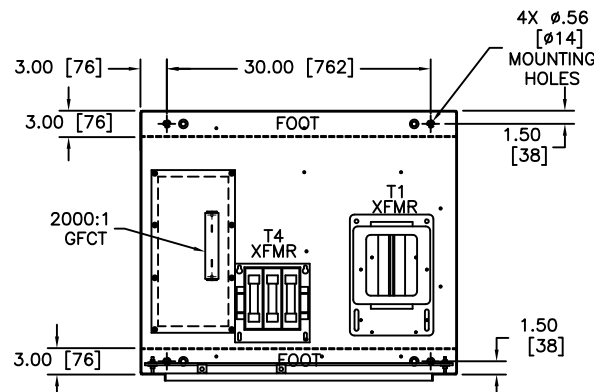

FRONT OF ENCLOSURE
PLAN VIEW

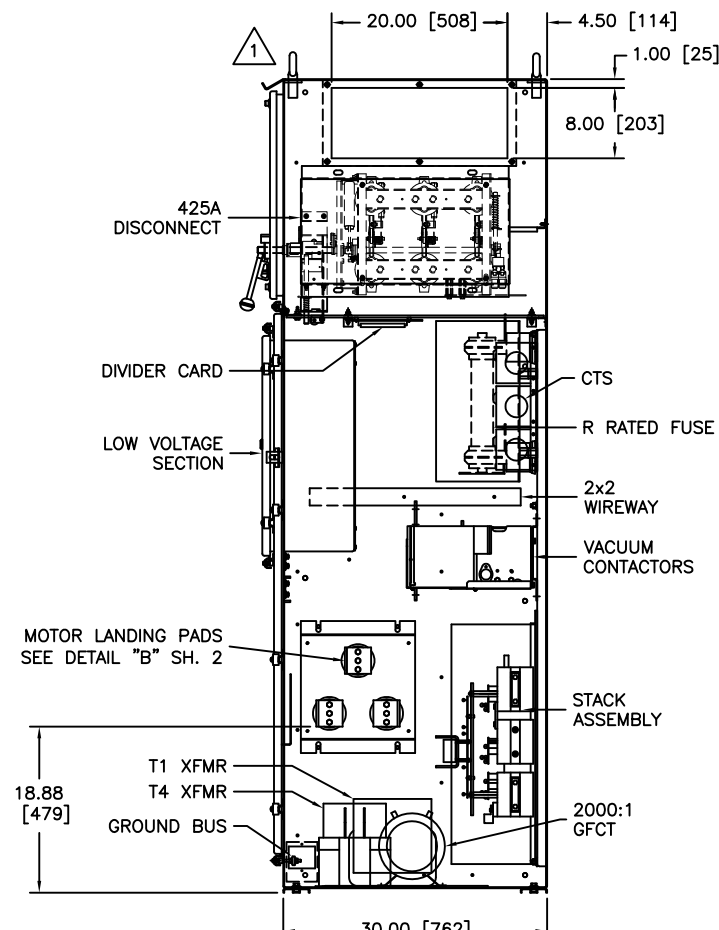

RIGHT SIDE INTERIOR VIEW

- NOTES:
- 1 REMOVABLE LIFTING EYEBOLTS
 - 2 N/A
 - 3 CABLE ENTRY/EXIT AREA. NO CUTOUT SUPPLIED. CUSTOMER TO CUT AS REQUIRED.
 - 4. ENCLOSURE COLOR: ANSI 61 GREY
 - 5. TIGHTEN BOLTS PER CHART BELOW

STEEL BOLT TORQUE IN POUND-FOOT [NEWTON-METER]				
1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
5 [6.8]	12 [16.3]	20 [27]	50 [67.8]	95 [128.8]

6. APPROXIMATE WEIGHT IS 1600LBS

RECORD
DRAWING

Carrier
A United Technologies Company

REVISION	DO NOT SCALE DWG	THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES (mm) INTERPRET DRAWING PER ASME Y14.5M-1994 TOLERANCES: .XX ± .02 .XXX ± .005 ANGLES ± 1° MATERIAL: FINISH:	SIGNATURES		DATE	TITLE: CFMVRMX18-1000-4160-12-CC SOLID STATE STARTER ENCLOSURE LAYOUT FOR: CARRIER CORP P.O. NO: 4500243976
				DRWN.	KJS		
				CHKD.			
				ENG.	JCS		
				MFG.			

CURTISS WRIGHT Flow Control Company BENSHAW		615 ALPHA DRIVE PITTSBURGH, PA. 15238 550 BRIGHT ST. E. LITTONWELL, ONTARIO N4W3W3	
SIZE	DWG NO.	REV	
D	S201300454-01	0	
SCALE: 3/32 : 1 SHEET 1 OF 7			