

VRF Indoor Unit 40VMI007---3—1-Way Cassette



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Three fan speeds - high, medium, and low
- Built-in condensate lift mechanism
- Condensate lift 27-1/2 inches
- Built in EXV (Electronic Expansion Valve) for installation ease
- No outside air connection
- Panel/grill (40VMI001----) - ordered separately


INDOOR UNIT MODEL		40VMI007---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	7,100
Sensible Cooling Capacity	Btu/h	5,530
Total Heating Rated Capacity	Btu/h	8,000
Airflow (H / M / L)	CFM	227 / 181 / 143
Sound Pressure (H / M / L)	dBA	35.4 / 33.0 / 29.4
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	10
Minimum Circuit Amps (MCA)	A	0.29
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Refrigerant		R-410A
Unit Width	in.	42
Unit Height	in.	6
Unit Depth	in.	16-3/4
Unit Net Weight	lbs.	28.00
Panel Width	in.	46-1/2
Panel Height	in.	1
Panel Depth	in.	18-1/4
Panel Net Weight	lbs.	7.75

ACCESSORIES


- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ 24V Controller 40VM900008
- ☐ Button Sensor 40VM900009

DIMENSIONAL DRAWING INDOOR UNIT 1-WAY CASSETTE 40VMI007---3

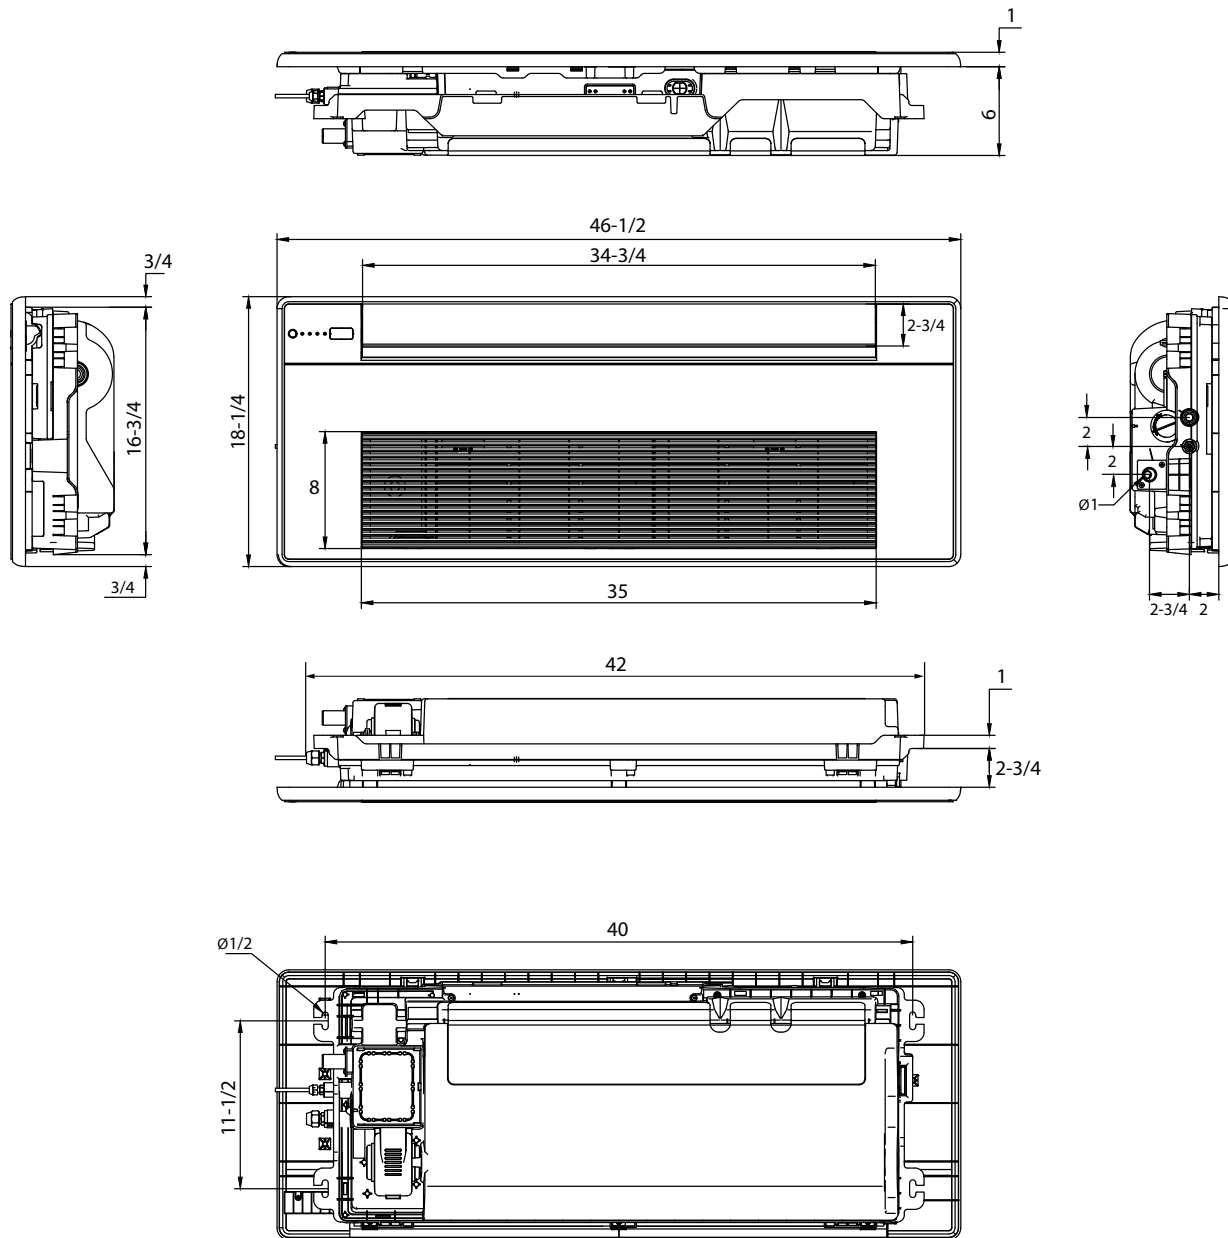

Dimensions are shown in inches.

Recommended Service / Maintenance Clearances

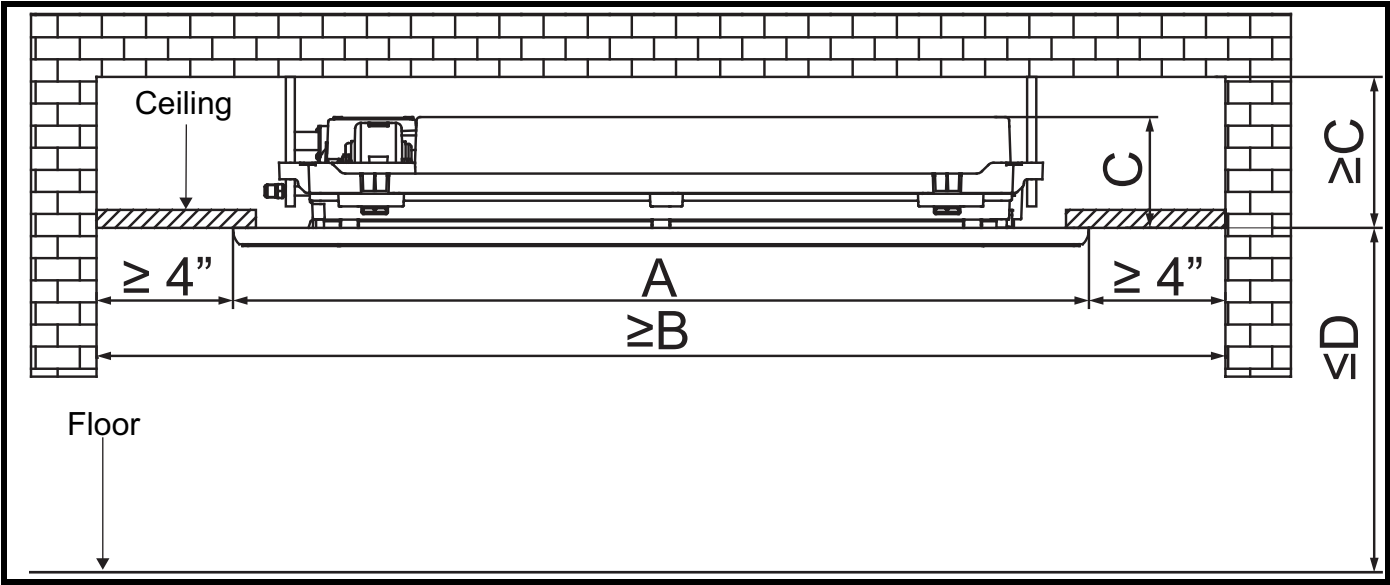

A	46-1/2
B	54-3/8
C	6
D	126

Distance from Wall or Obstruction

