

VRF Indoor Unit 40VMM036---3 — Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is optional
- Three Fan Speeds – High, Medium and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built-in EXV (Electronic Expansion Valve) for Installation

Indoor Unit Model	40VMM036---3	
-------------------	--------------	--

PERFORMANCE

Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	42,000
Airflow (H / M / L)	CFM	1117 / 888 / 751
Sound Pressure (H / M / L)	dBA	45.9 / 42.6 / 38.3

ELECTRICAL

Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	310
Minimum Circuit Amps	A	5.0
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA

Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	3/4 (OD)
Maximum External Static Pressure (ESP)	in. wg	0.6
Refrigerant		R-410A
Unit Width	in.	50-3/4
Unit Height	in.	11-7/8
Unit Depth	in.	34-1/8
Unit Net Weight	lbs.	124

ACCESSORIES (Optional)

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Centralized Controller 40VM900004
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING
INDOOR UNIT MEDIUM STATIC DUCT 40VMM036--3

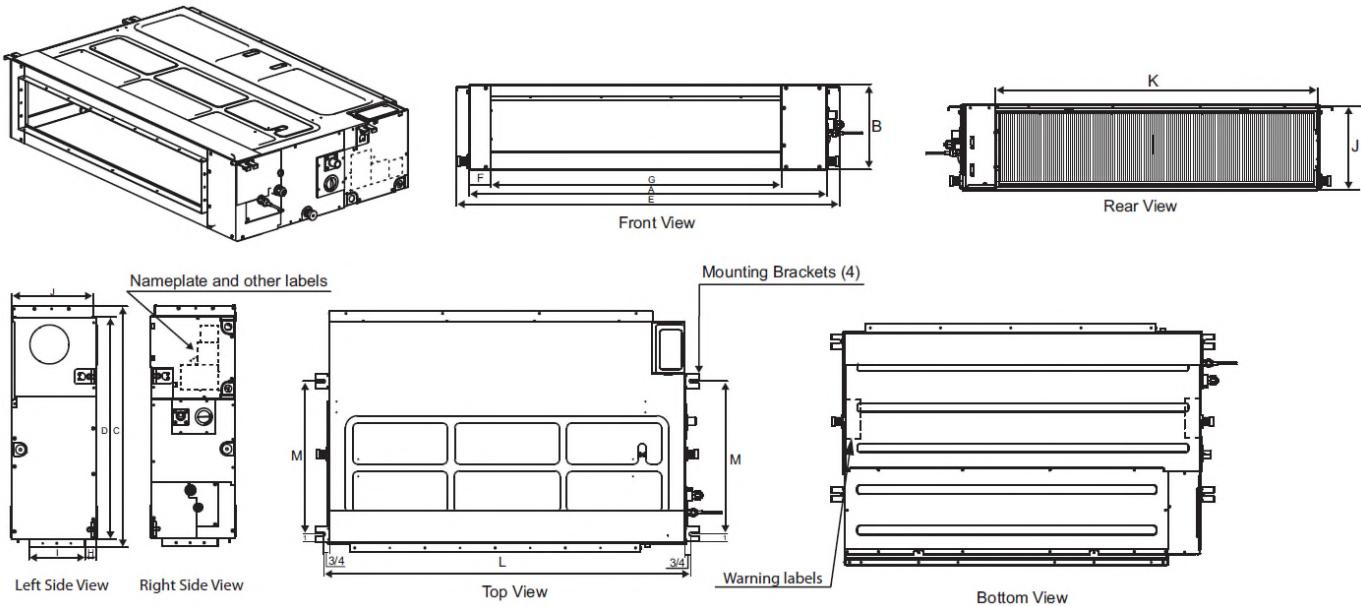

40VMM UNIT SIZE	DIMENSION (in.)													
	A	B	C	D	E	F	G	H	I	J	K	L	M	
036	47-1/8	11-7/8	34-1/8	31-1/2	50-3/4	3-1/8	37-7/16	1-1/2	8	11-3/8	43	48-7/8	19-5/8	

NOTE: All dimensions shown in inches.



© Carrier Corporation 2016

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
 Printed in U.S.A. Form 40VMM036-C-1SD Pg2 11-16 Replaces: NEW