


# VRF Outdoor Unit MMY-MUP096H1FT9PUL - Elite Heat Heat Recovery

**TOSHIBA**  
**Carrier**

## Submittal Data

Job Name \_\_\_\_\_  
Tag \_\_\_\_\_

Location \_\_\_\_\_

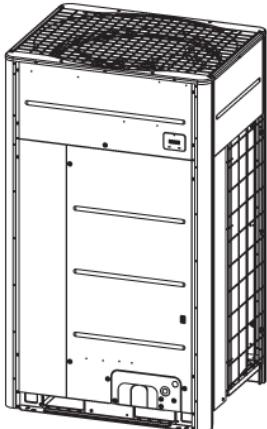

A210612

### Heat Recovery Features

- Modules and pairings available from 6 to 30 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range  
Cooling (db): -10° to 125°F  
(-15° to 52°C)  
Heating (wb): -30° to 60°F  
(-1° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Header Unit Model		MMY-MUP096H1FT9PUL		ELECTRICAL		
<b>PERFORMANCE</b>						
Nominal Cooling Capacity	Btu/h	96,000	Power Supply	V/Ph/Hz	208-230/3/60	
Nominal Heating Capacity	Btu/h	108,000	Minimum Circuit Amps (MCA)	A	52.3	
Maximum Number of Indoor Units		17	Maximum Overcurrent Protection (MOCP)	A	60	
<b>SIMULTANEOUS COOLING AND HEATING EFFICIENCY†</b>						
SCHE, Ducted FCUs		32.0	<b>COMPRESSORS</b>			
SCHE, Ductless FCUs		35.0	Type (Number)		Hermetic Triple Rotary (1)	
<b>COOLING EFFICIENCY†</b>						
EER/IEER, Ducted FCUs	Btu/Wh	12.2/21.6	<b>FAN MOTOR</b>			
Power Consumption, Ducted FCUs	kW	6.49	Motor Output	kW	0.38 x 2	
EER/IEER, Ductless FCUs	Btu/Wh	13.3/25.3	<b>PHYSICAL DATA</b>			
Power Consumption, Ductless FCUs	kW	6.72	Pipe Connection Size - Liquid (High Pressure)	in.	1/2 (Brazed)	
<b>HEATING EFFICIENCY†</b>			Pipe Connection Size - Gas (Low Pressure)	in.	7/8 (Brazed)	
COP at 47°F, Ducted FCUs		4.10	Discharge - Gas (High/Low Pressure)		3/4 (Brazed)	
Power Consumption, Ducted FCUs	kW	6.31	Refrigerant		R-410A	
COP at 47°F, Ductless FCUs		4.80	Factory Charge††	lb	19.8	
Power Consumption, Ductless FCUs	kW	6.10	Unit Width	in.	51-1/2	
Fan Type (Qty)		Propeller (2)	Unit Height	in.	66-1/2	
Airflow, Standard Range	CFM	7240	Unit Depth	in.	31-1/4	
Sound Pressure	dBA	61.0	Net Weight	lb	783	
External Static Pressure*	in. wg	0.321				

### LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb
SCHE	— Simultaneous Cooling and Heating Efficiency

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db  
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

\*Requires setting by menu functions.


††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

## **DIMENSIONAL DRAWING OUTDOOR UNIT MMY-MUP096H1FT9PUL**

### Note

1. If there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 78.7in [2000mm] apart from the obstacle.
2. Draw out the pipe procured locally to the front of the outdoor unit horizontally, and keep 19.7in [500mm] or more between the outdoor unit and traversing pipe if placing pipe transversely.

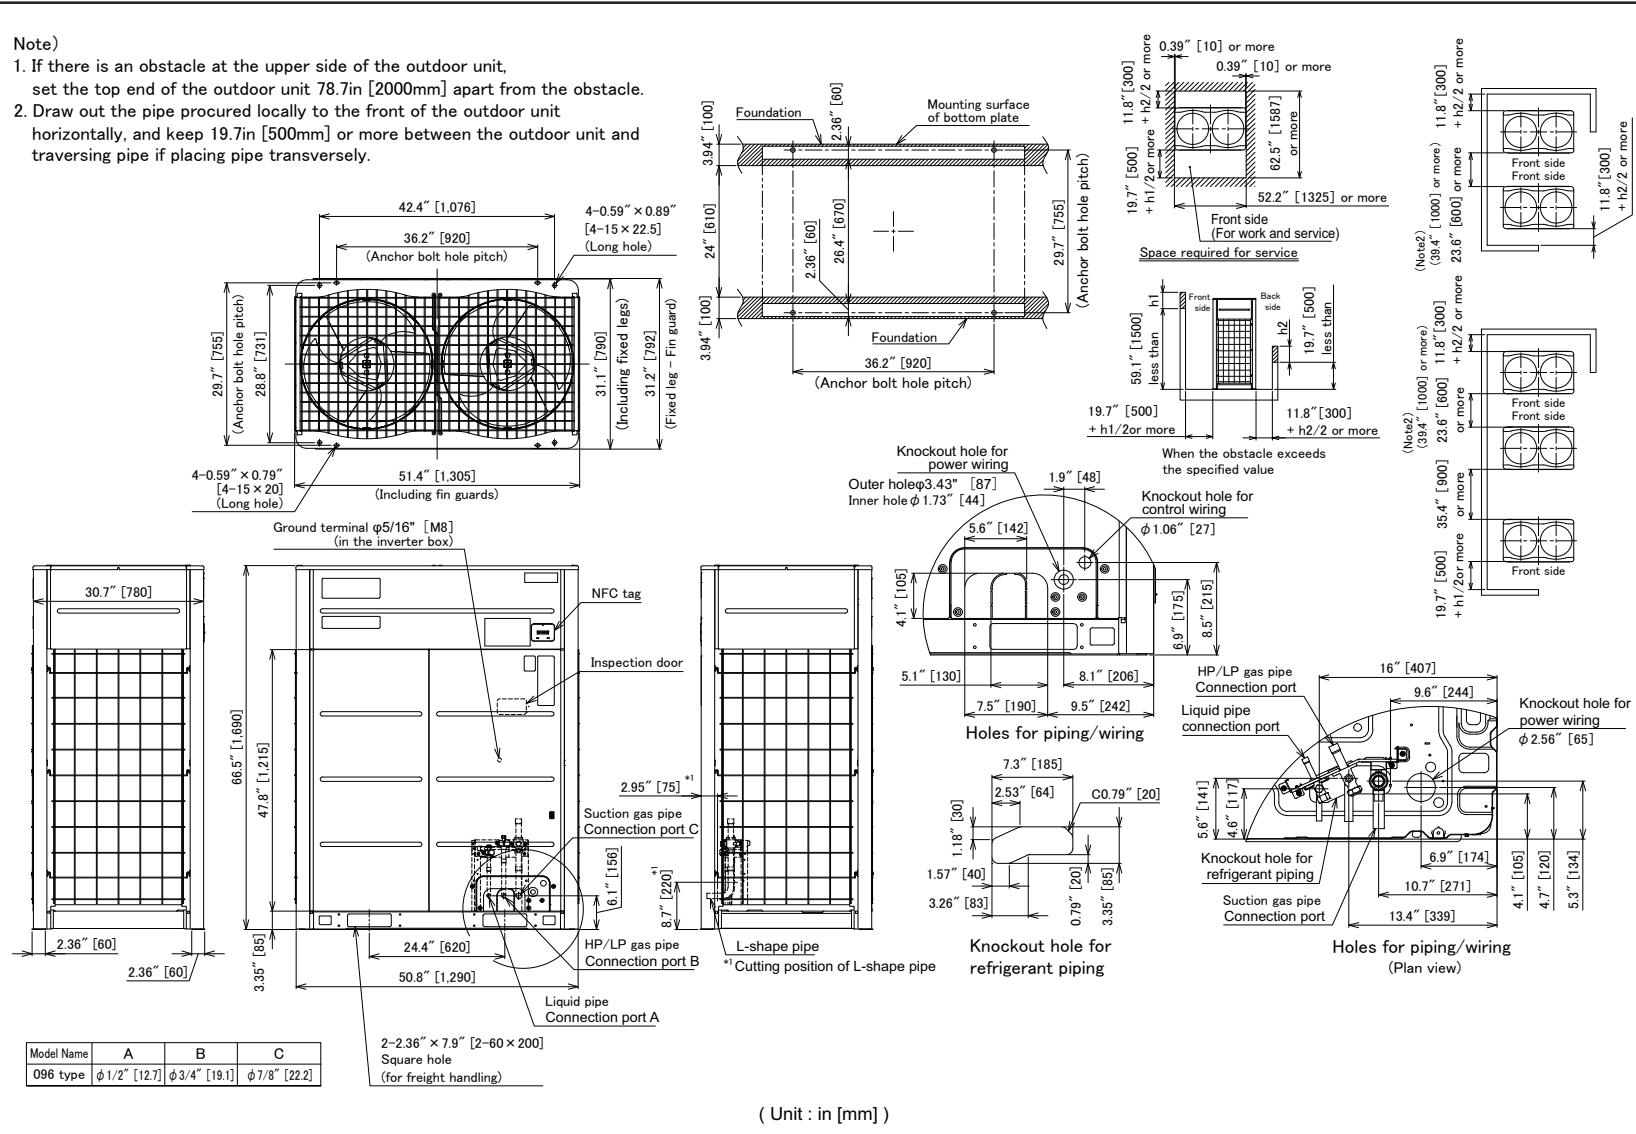

( Unit : in [mm] )



© 2024 Carrier. All rights reserved.

Edition Date: 05/24

Printed in U.S.A.

Form No: MMY-MUP096H1FT9PUL 02

Replaces: MMY-MUP096H1FT9PUL\_01

**Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.**