

VRF Outdoor Unit 38VMA192HDS5-1 - Heat Pump



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



Heat Pump Features

- 6, 8, 10, and 12 ton modules available
- Modules have inverter-driven scroll compressors
- Direct-drive, inverter-driven outdoor motor
- Modules can be combined to form larger systems, up to 36 tons
- 3280 ft (1000 m) actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Up to 3937 ft (1200 m) control wiring between the outdoor units and indoor units
- Operating temperature range
 Cooling (db): 5° to 125°F
 (-15° to 52°C)
 Heating (wb): -5° to 64°F
 (-21° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	38VMA192HDS5-1	
Header Unit Model	38VMA096HDS5-1	
Follower Model	38VMA096HDS5-1	
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	184,800
Nominal Heating Capacity	Btu/h	216,000
Maximum Total Connected Indoor Unit Capacity		50% to 135%
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	11.60/22.00
Power Consumption, Ducted FCUs	kW	14.50
EER/IEER, Ductless FCUs	Btu/Wh	12.30/21.50
Power Consumption, Ductless FCUs	kW	12.90
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.60
Power Consumption, Ducted FCUs	kW	16.10
COP at 47°F, Ductless FCUs		3.75
Power Consumption, Ductless FCUs	kW	14.70
Fan Type (Qty)	Propeller (4)	
Airflow, Standard Range	CFM	2 X 7650
Sound Pressure	dBA	65
External Static Pressure*	in. wg	0.08
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/3/60
Minimum Circuit Amps (MCA)	A	46 + 46
Recommended Fuse Size	A	50 + 50

COMPRESSORS

Type (Number)		Inverter Hermetic Scroll (2)
---------------	--	------------------------------

FAN MOTOR

Motor Type (Steps)	Inverter Direct Driven (13)	
Motor Output	kW	4 X 0.27

PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)**	in.	5/8 (Brazed)
---	-----	--------------

Pipe Connection Size - Gas (Low Pressure)**	in.	1-1/8 (Brazed)
---	-----	----------------

Balance	in.	1/4 (Brazed)
---------	-----	--------------

Refrigerant	R-410A	
-------------	--------	--

Factory Charge††	lb	2 X 37.5
------------------	----	----------

Unit Width	in.	2 X 52-3/4
------------	-----	------------

Unit Height	in.	64-3/8
-------------	-----	--------

Unit Depth	in.	31-1/8
------------	-----	--------

Net Weight	lb	2 X 659
------------	----	---------

REQUIRED ACCESSORY

Twinning Kit	40VM900021
--------------	------------

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

**Main pipe size leaving twinning kit.



††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.


LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb


DIMENSIONAL DRAWING
OUTDOOR UNIT COMBINATION 38VMA192HDS5-1

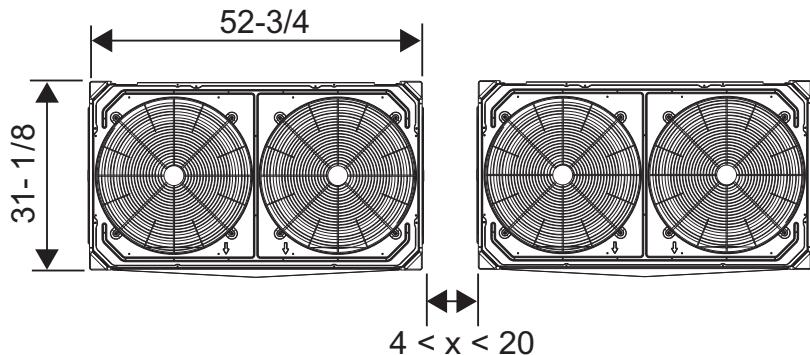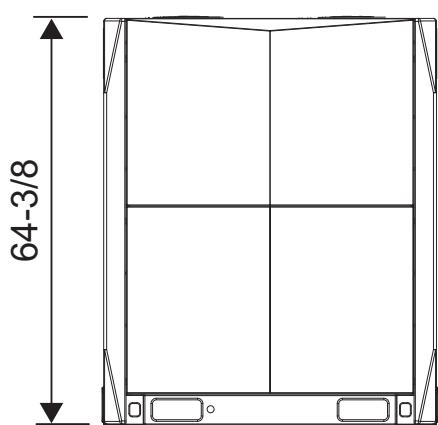

Two rows

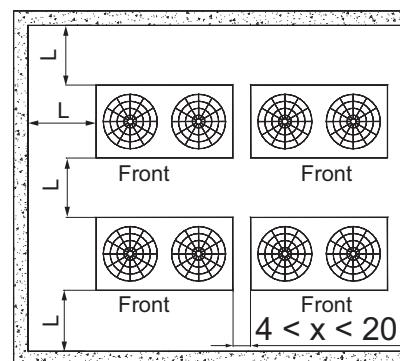


More than two rows

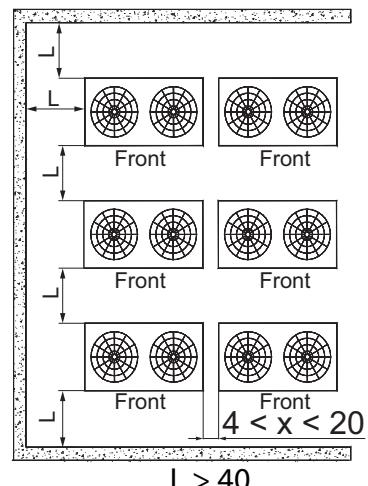

NOTE: All dimensions shown in inches.

MODEL NAME	OUTDOOR UNIT	
	HEADER UNIT	FOLLOWER UNIT
38VMA192HDS5-1	38VMA096HDS5-1	38VMA096HDS5-1

**DIMENSIONAL DRAWING
OUTDOOR SINGLE UNIT 38VMA096HDS5-1**

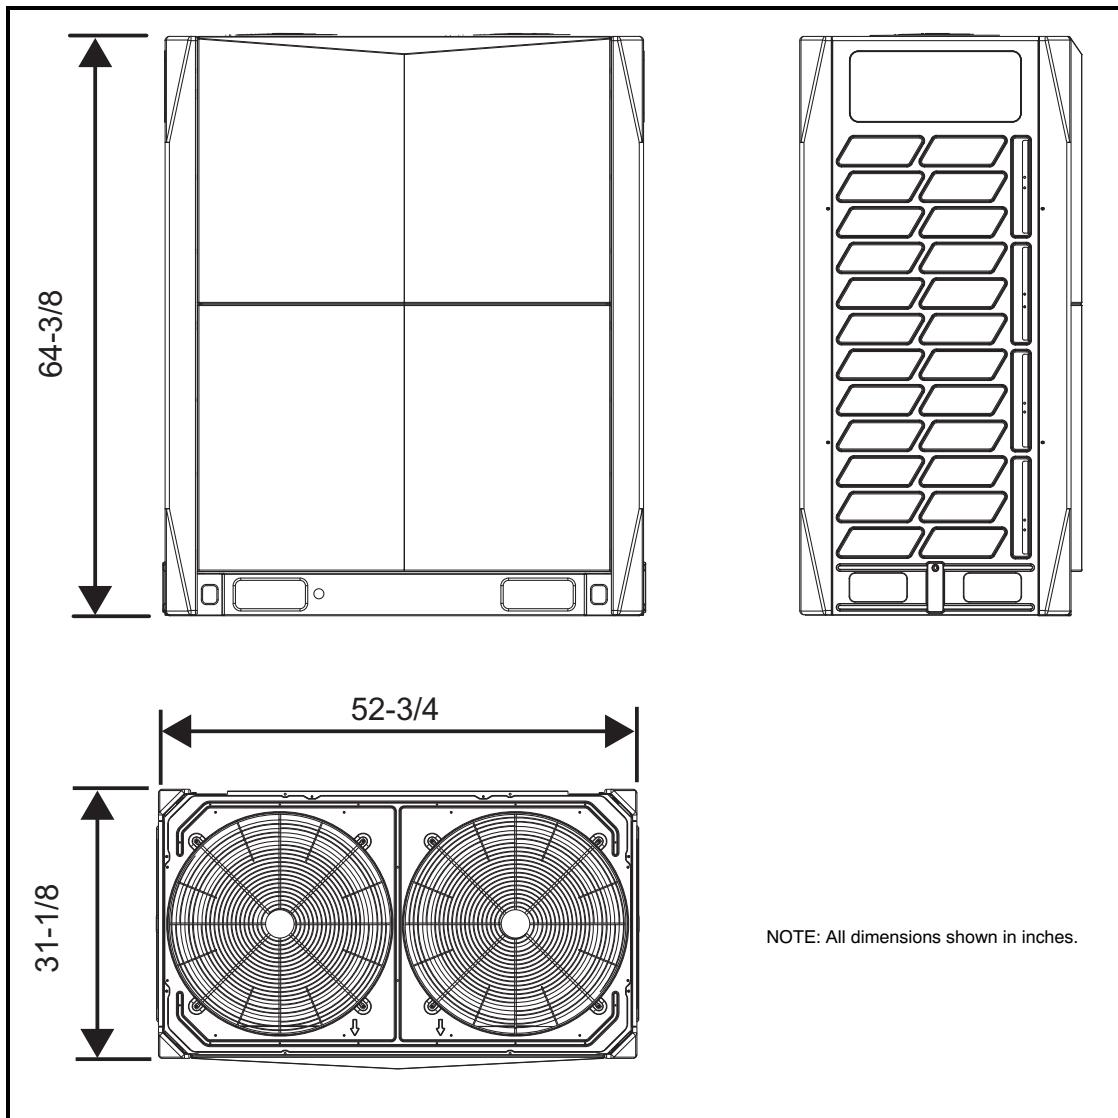

© Carrier Corporation 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
Printed in U.S.A. Form 38VMH1925-C-2SD Pg 3 08-18 Replaces: 38VMH1925-C-1SD