

VRF Indoor Unit 40VMM018A--3—Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built in EXV (Electronic Expansion Valve) for Installation




INDOOR UNIT MODEL		40VMM018A--3	
PERFORMANCE			
Cooling Rated Capacity	Btu/h	18,000	
Heating Rated Capacity	Btu/h	21,000	
Airflow (H / M / L)	CFM	640 / 540 / 480	
Sound Pressure (H / M / L)	dBA	38.6 / 33.6 / 31.9	
ELECTRICAL			
Power Supply	V/Ph/Hz	208-230/1/60	
Indoor Fan Motor Power Consumption (Input)	W	185	
Minimum Circuit Amps (MCA)	A	3.13	
Maximum Overcurrent Protection	A	15	
Motor Type		DC	

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	3/4 NPT
Maximum External Static Pressure (ESP)	in. wg	0.6
Refrigerant		R-410A
Unit Width	in.	48-1/2
Unit Height	in.	10-5/8
Unit Depth	in.	30-1/2
Net Unit Weight	lb	99.2


ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING
INDOOR UNIT MEDIUM STATIC DUCT 40VMM018A--3

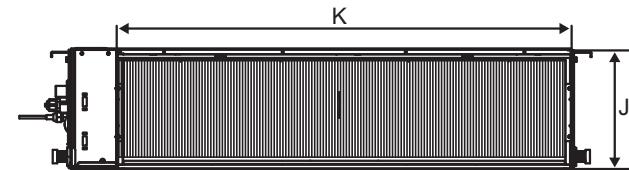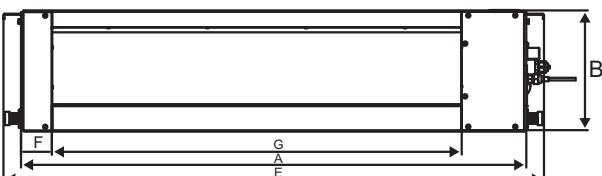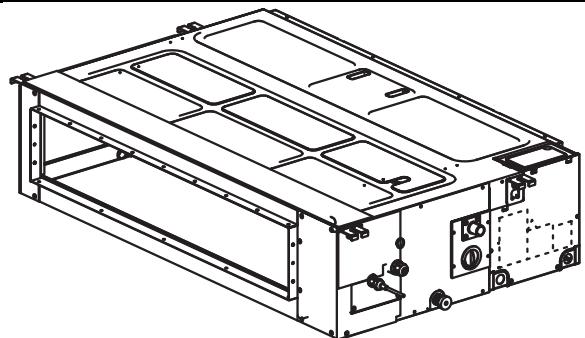


Front View

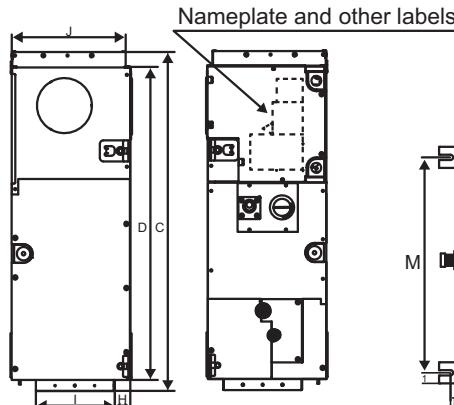


Left Side View

Right Side View

Mounting Brackets (4)

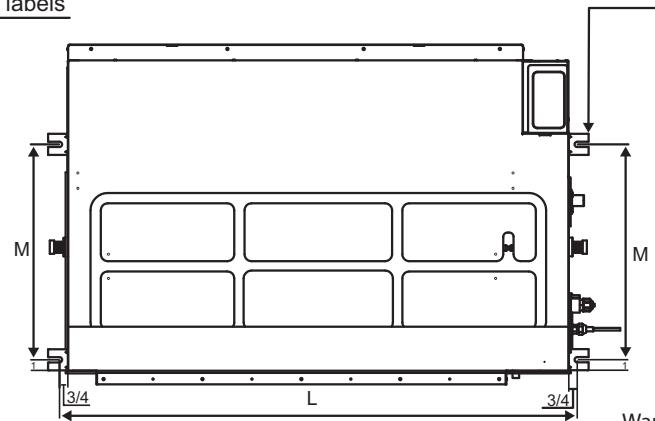

Top View

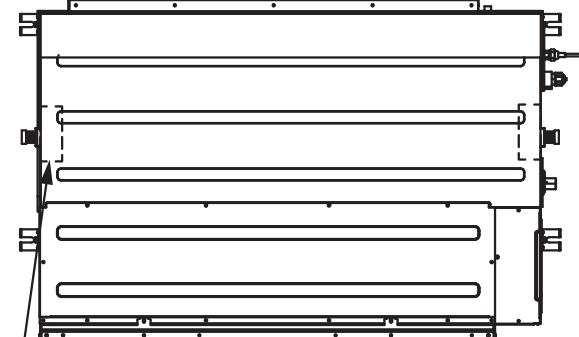

Bottom View

Warning labels

Note: All dimensions are shown in inches

40VMM UNIT SIZE	DIMENSION (in.)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
018	44 7/8	10 5/8	30 1/2	28	48 1/2	2 5/8	36 3/4	1 3/8	7	10 1/4	40 3/4	46 1/2	19 1/4



© Carrier Corporation 2018