




30GX080-265

AIR-COOLED LIQUID CHILLER

- PERFORMANCE DATA**
- CERTIFIED DIMENSION PRINT**
- FIELD WIRING DIAGRAM**



Date:	Supersedes:	30GX080-265 AIR-COOLED LIQUID CHILLER	30GX	Rev.: -4SB
JOB NAME:		LOCATION:		
BUYER:		BUYER P.O. #	CARRIER #	
UNIT NUMBER:		MODEL NUMBER:		
PERFORMANCE DATA CERTIFIED BY:			DATE:	

DESCRIPTION

Packaged air-cooled liquid chiller factory wired, piped, and charged with HFC-134a. Upward discharge airflow minimizes directional sound and dissipates heat away from surrounding areas.

FEATURES

Cooler is mechanically cleanable “flooded” shell-and-tube type with removable heads. It is tested and stamped in accordance with ASME Code for a refrigerant working side pressure of 220 psig (1517 kPa) and a maximum fluid side pressure of 300 psig (2068 kPa) (250 psig [1724 kPa] in Canada) and is insulated with ¾-in. (19 mm) closed-cell polyvinyl chloride foam.

Cooler can be equipped with electric heater to help protect against cooler freeze-up (use of inhibited glycol anti-freeze recommended for freeze protection).

Compressor is semi-hermetic twin screw design with refrigerant gas cooled motor and integral oil filter and discharge gas muffler. Complete thermal and electrical protection is provided.

Air-cooled condenser is constructed of fins mechanically bonded to seamless copper tubes. Coils are leak and pressure tested at 450 psig (3103 kPa).

Condenser fans are direct driven 11-blade, shrouded axial type, statically and dynamically balanced, discharging air vertically upward, protected by coated steel wire safety guards.

Condenser fan motors are totally enclosed 3-phase with permanently lubricated bearings and Class F insulation (except speed control motors).

Each refrigerant circuit includes oil separator, high side pressure relief device, liquid and discharge line shutoff valve, filter drier, moisture indicating sight glass, expansion/level control device.

Microprocessor control includes keypad with diagnostic display displaying set points, time, system status (including temperatures, pressures and % loading) and the alarm conditions.

Automatic compressor lead/lag.

Capacity control based on leaving chilled water temperature with return water temperature sensing.

7-Day time scheduling of pump(s) and chiller.

60-Hz Models: 080, 090, 106, 115, 125, 136, 151, 161, 176, 206, 226, 251, and 265.

50-Hz Models: 080, 090, 105, 106, 115, 125, 136, 150, 160, 161, 175, 205, 225, 226, 250, and 265.

PERFORMANCE DATA

UNIT

Capacity _____

Compressor Input Power _____ kW

Unit Input Power _____ kW

Minimum Outdoor Operating Temperature _____

Capacity Control Steps _____

Minimum Capacity % _____ %

EER _____

Entering Air Temperature _____

Weight _____

COOLER

Cooler Fluid _____

Entering Fluid Temperature _____

Leaving Fluid Temperature _____

Flow Rate _____

Pressure Drop _____

Fouling Factor _____

ELECTRICAL DATA

Power Supply to Unit _____ Volts _____ Ph _____ Hz

Power Supply to Control Circuit _____ Volts _____ Ph _____ Hz

Minimum Amps Circuit 1 _____ Amps

Maximum Fuse Amps Circuit 1 _____ Amps

Control Circuit Fuse Amps _____ Amps

Maximum Instantaneous Current Flow _____ Amps

Minimum Amps Circuit 2 _____ Amps

Maximum Fuse Amps Circuit 2 _____ Amps

OPTIONS

- | | |
|--------------------------------|--------------------------------|
| ☐ _____ | ☐ _____ |
| ☐ _____ | ☐ _____ |
| ☐ _____ | ☐ _____ |
| ☐ _____ | ☐ _____ |

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES
CARRIER


P O BOX 4808
SYRACUSE N. Y.
13221

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS
PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED
OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE
WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT

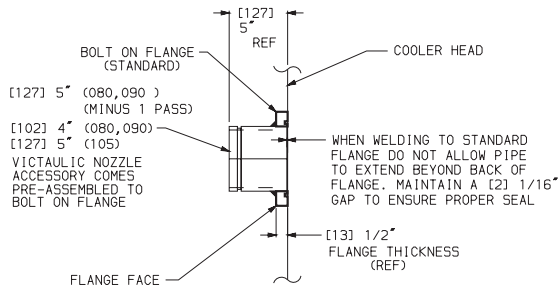




DETAIL "A"
NOZZLE CONNECTIONS

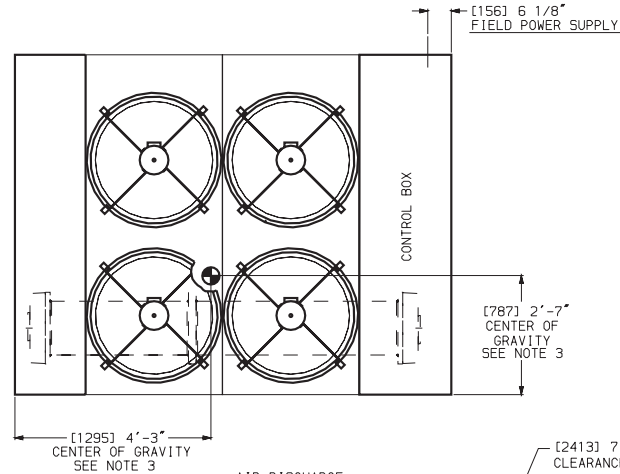

UNIT	TOTAL OPERATING WEIGHT - AL	TOTAL OPERATING WEIGHT - CU
30GX080	6313 LB	6988 LB
30GX090	6333 LB	7008 LB
30GX105	6809 LB	7484 LB

NOTES:

- UNIT MUST HAVE CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1524 MM] 5 FT (FROM SOLID SURFACE)
SIDES - [1829 MM] 6 FT
- UNIT WITH SOUND HOODS REQUIRES CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1829 MM] 6 FT
SIDES - [2134 MM] 7 FT
- CENTER OF GRAVITY SHOWN IS FOR ALUMINUM FIN COIL.
SEE INSTALLATION INSTRUCTIONS FOR ALL OTHER VALUES.

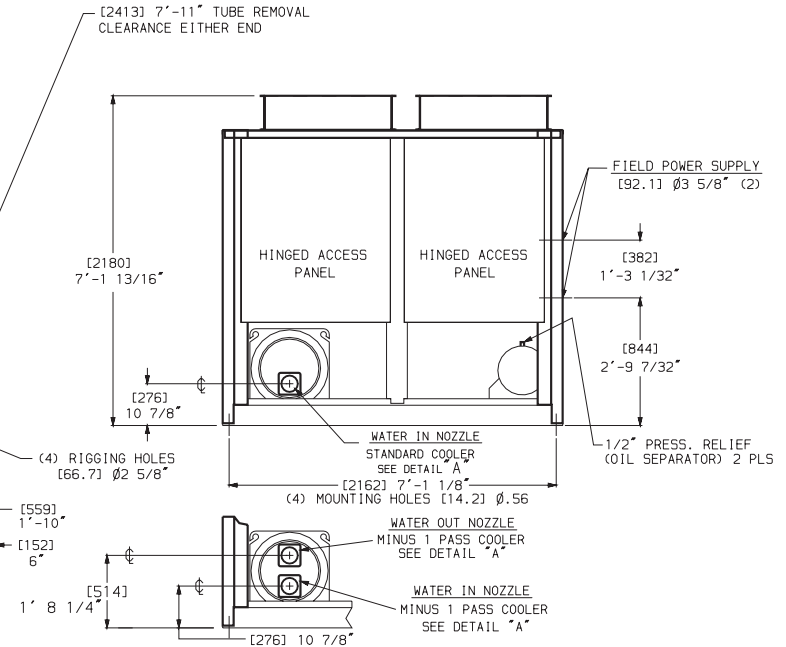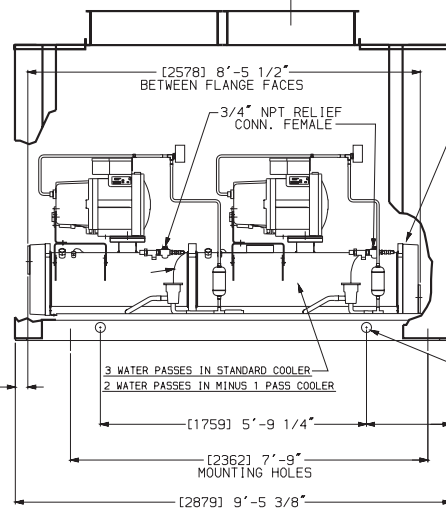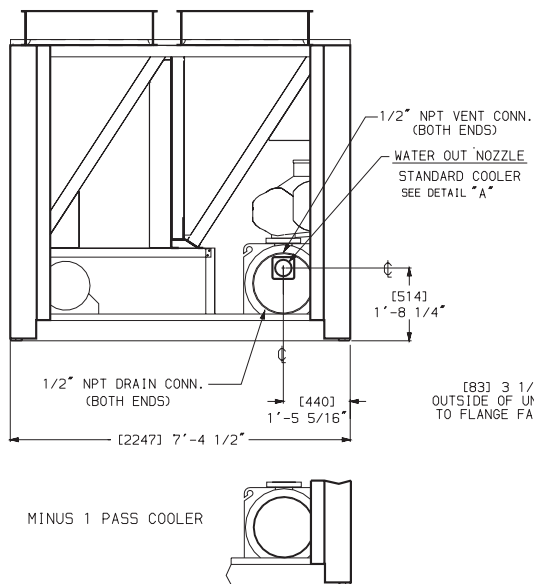

DATE 11/11/97
SUPERSEDES 11/04/96

30GX080-105 AIR COOLED CHILLERS

30GX501580

REV A

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES
CARRIER

P O BOX 4808
SYRACUSE N. Y.
13221

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS
PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED
OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE
WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT

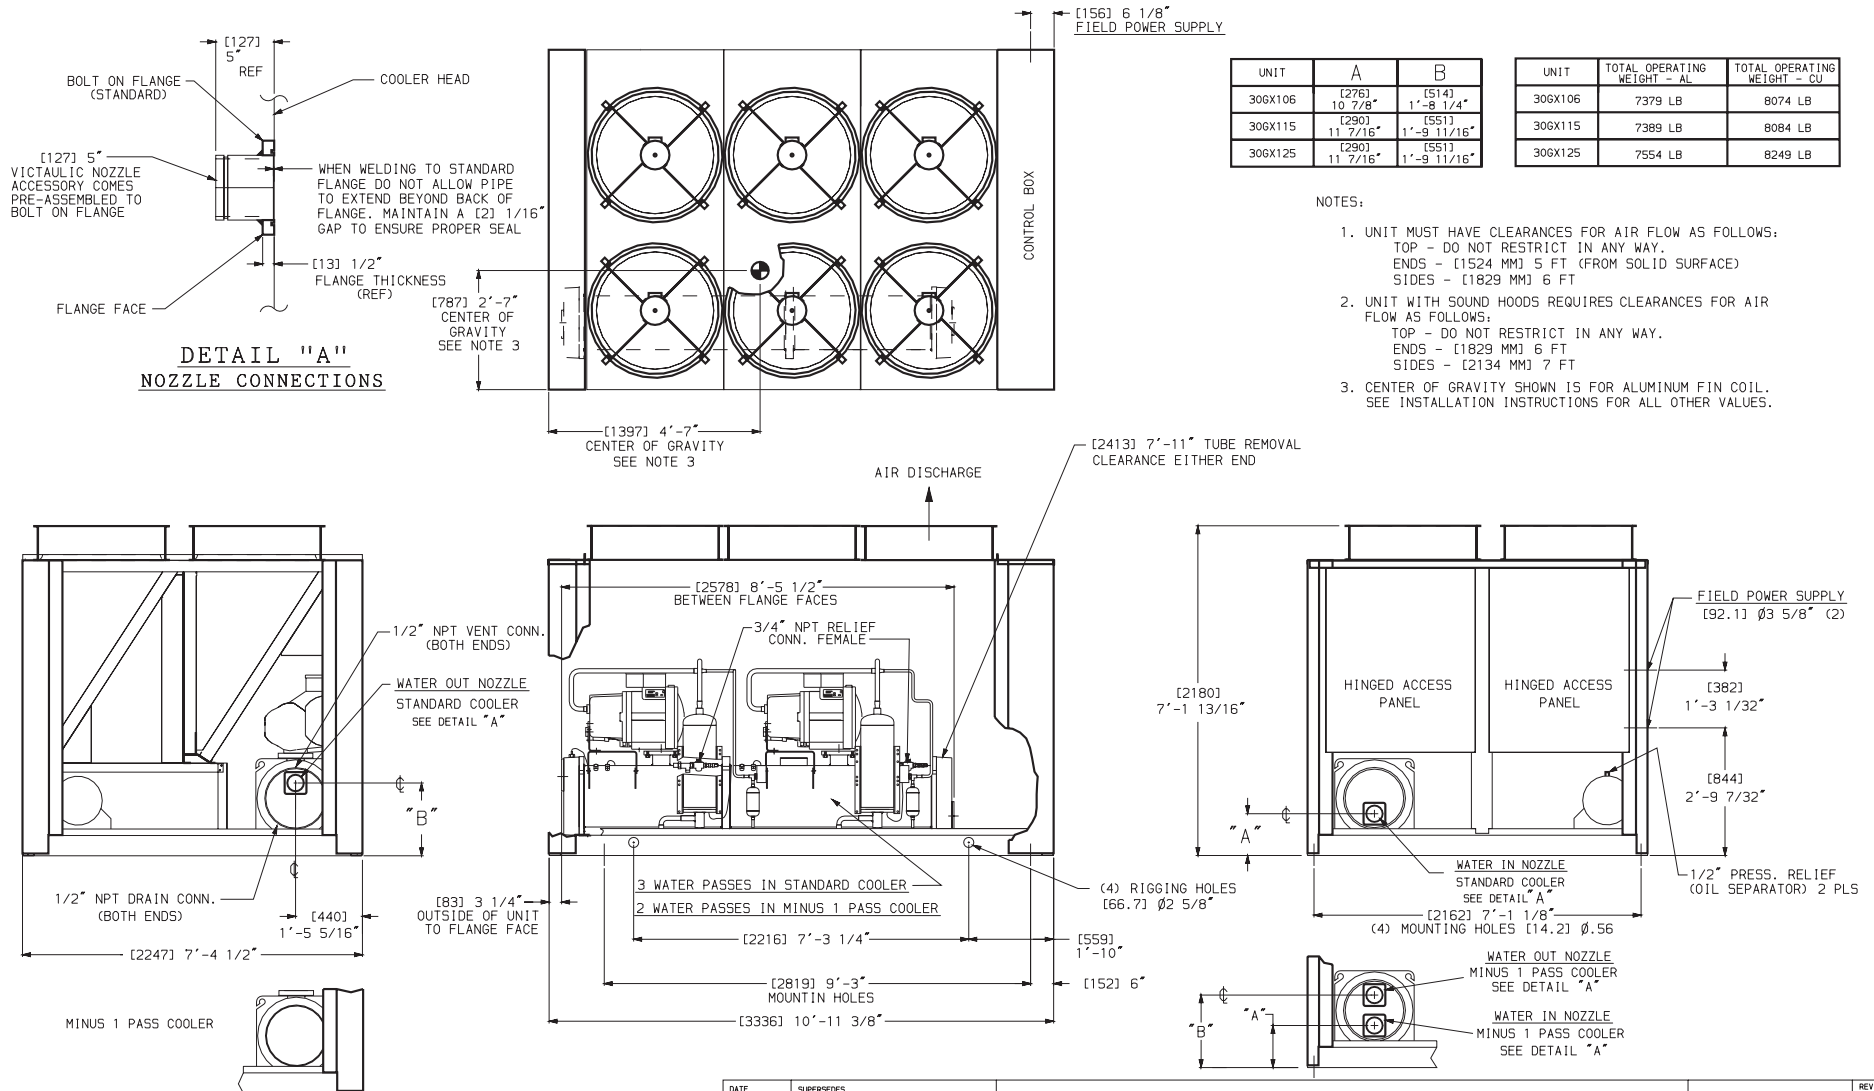

DATE 11/11/97 SUPERSEDES 11/04/96

30GX106-125 AIR COOLED CHILLERS

30GX501581

REV A

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES
CARRIER

P O BOX 4808
SYRACUSE N. Y.
13221

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS
PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED
OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE
WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT

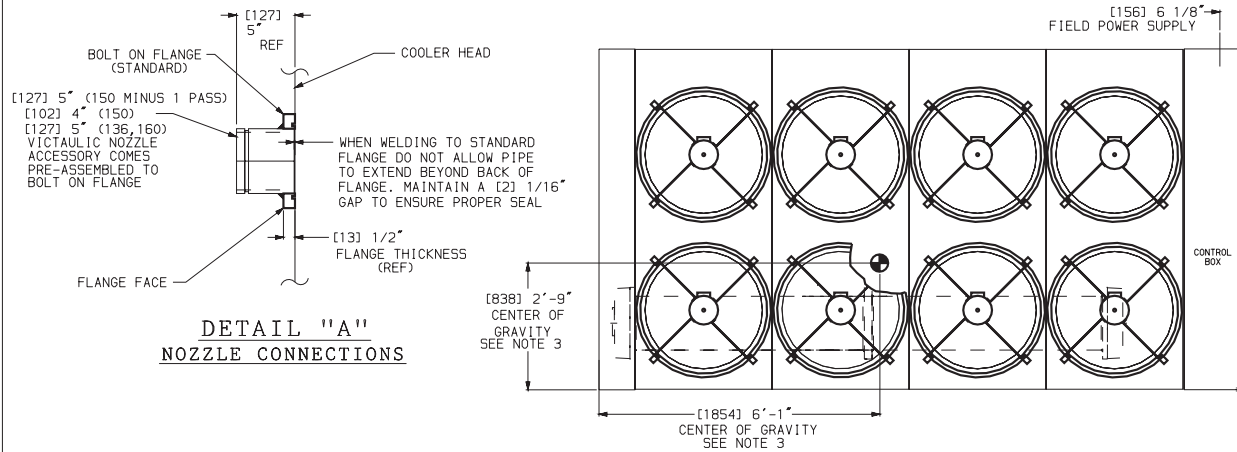


DETAIL "A"
NOZZLE CONNECTIONS

UNIT	A	B	C	B	C	D	E
		STANDARD COOLER	STANDARD COOLER	MINUS 1 PASS COOLER	MINUS 1 PASS COOLER		
30GX136	[83] 3 1/4"	[290] 11 7/16"	[551] 1'-9 11/16"	[290] 11 7/16"	[551] 1'-9 11/16"	3	2
30GX150	[92] 3 5/8"	[276] 10 7/8"	[514] 1'-8 1/4"	-	[395] 1'-3 1/2"	2	1
30GX160	[92] 3 5/8"	[290] 11 7/16"	[551] 1'-9 11/16"	-	[420] 1'-4 1/2"	2	1

UNIT	TOTAL OPERATING WEIGHT - AL	TOTAL OPERATING WEIGHT - CU
30GX136	8717 LB	9797 LB
30GX150	8550 LB	9630 LB
30GX160	8873 LB	9958 LB

NOTES:

- UNIT MUST HAVE CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1524 MM] 5 FT (FROM SOLID SURFACE)
SIDES - [1829 MM] 6 FT
- UNIT WITH SOUND HOODS REQUIRES CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1829 MM] 6 FT
SIDES - [2134 MM] 7 FT
- CENTER OF GRAVITY SHOWN IS FOR ALUMINUM FIN COIL.
SEE INSTALLATION INSTRUCTIONS FOR ALL OTHER VALUES.

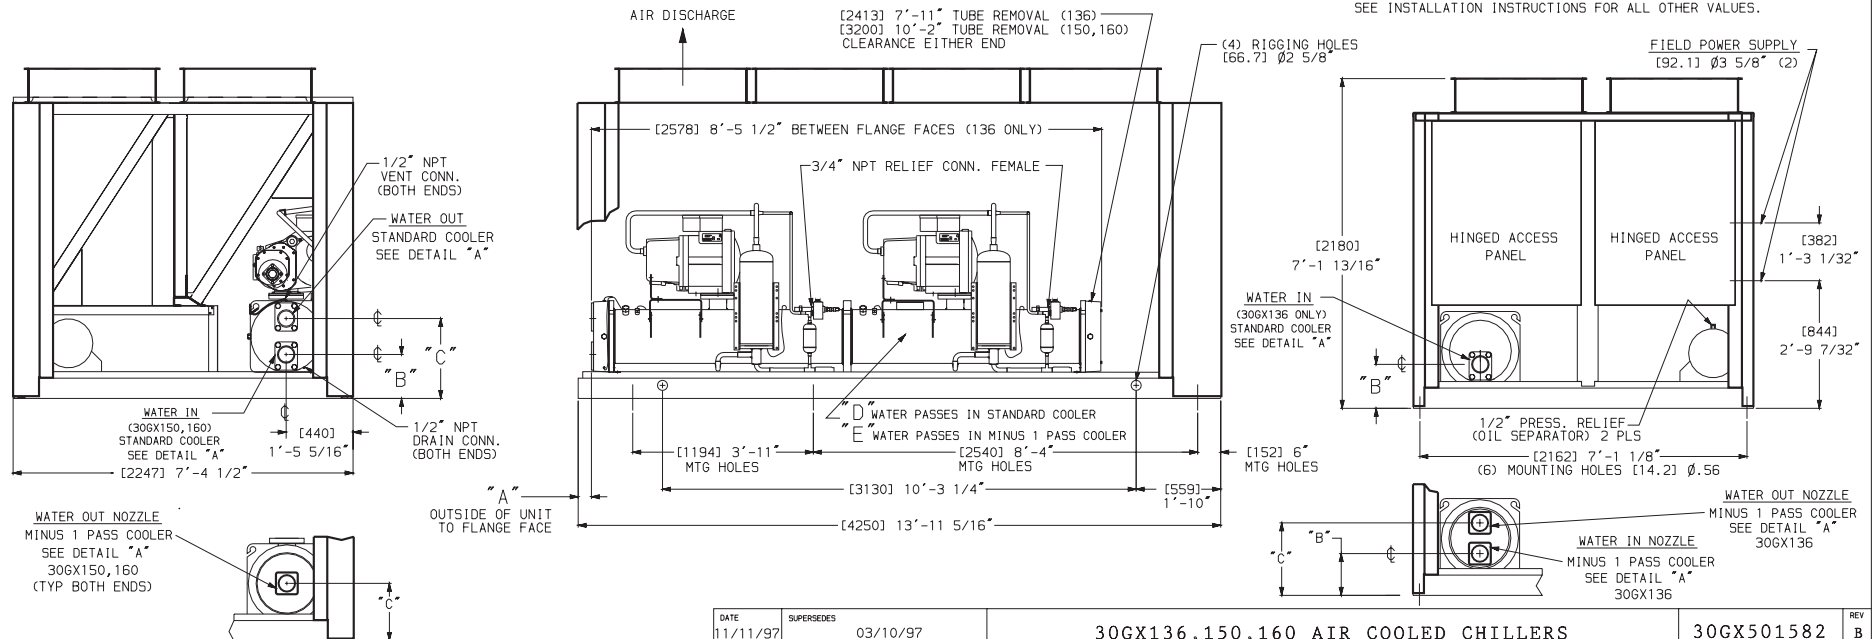

DATE 11/11/97 SUPERSEDES 03/10/97

30GX136, 150, 160 AIR COOLED CHILLERS

30GX501582

REV B



CERTIFIED DIMENSION PRINT

UNITED
TECHNOLOGIES
CARRIER

P O BOX 4808
SYRACUSE N. Y.
13221

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.


SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT

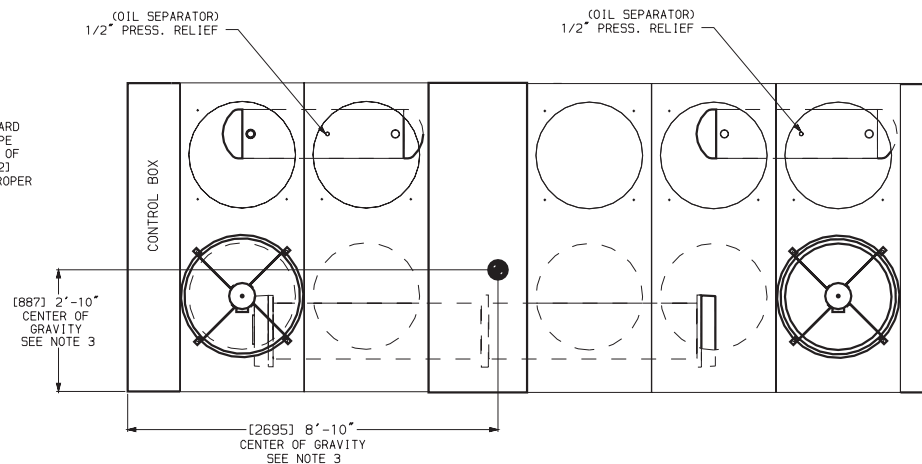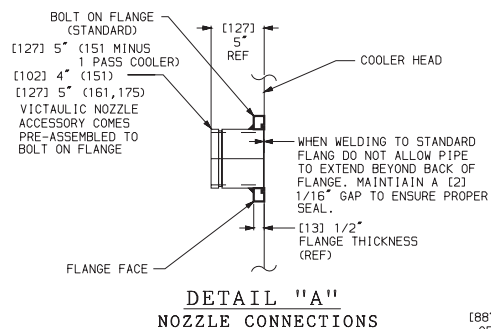

UNIT	TOTAL OPERATING WEIGHT - AL	TOTAL OPERATING WEIGHT - CU
30GX151	9118 LB	10503 LB
30GX161	9446 LB	10831 LB
30GX175	9466 LB	10851 LB

NOTES:

1. UNIT MUST HAVE CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1524 MM] 5 FT (FROM SOLID SURFACE)
SIDES - [1829 MM] 6 FT
2. UNIT WITH SOUND HOODS REQUIRES CLEARANCES FOR AIR FLOW AS FOLLOWS:
TOP - DO NOT RESTRICT IN ANY WAY.
ENDS - [1829 MM] 5 FT
SIDES - [2134 MM] 7 FT
3. CENTER OF GRAVITY SHOWN IS FOR ALUMINUM FIN COIL.
SEE INSTALLATION INSTRUCTIONS FOR ALL OTHER VALUES.

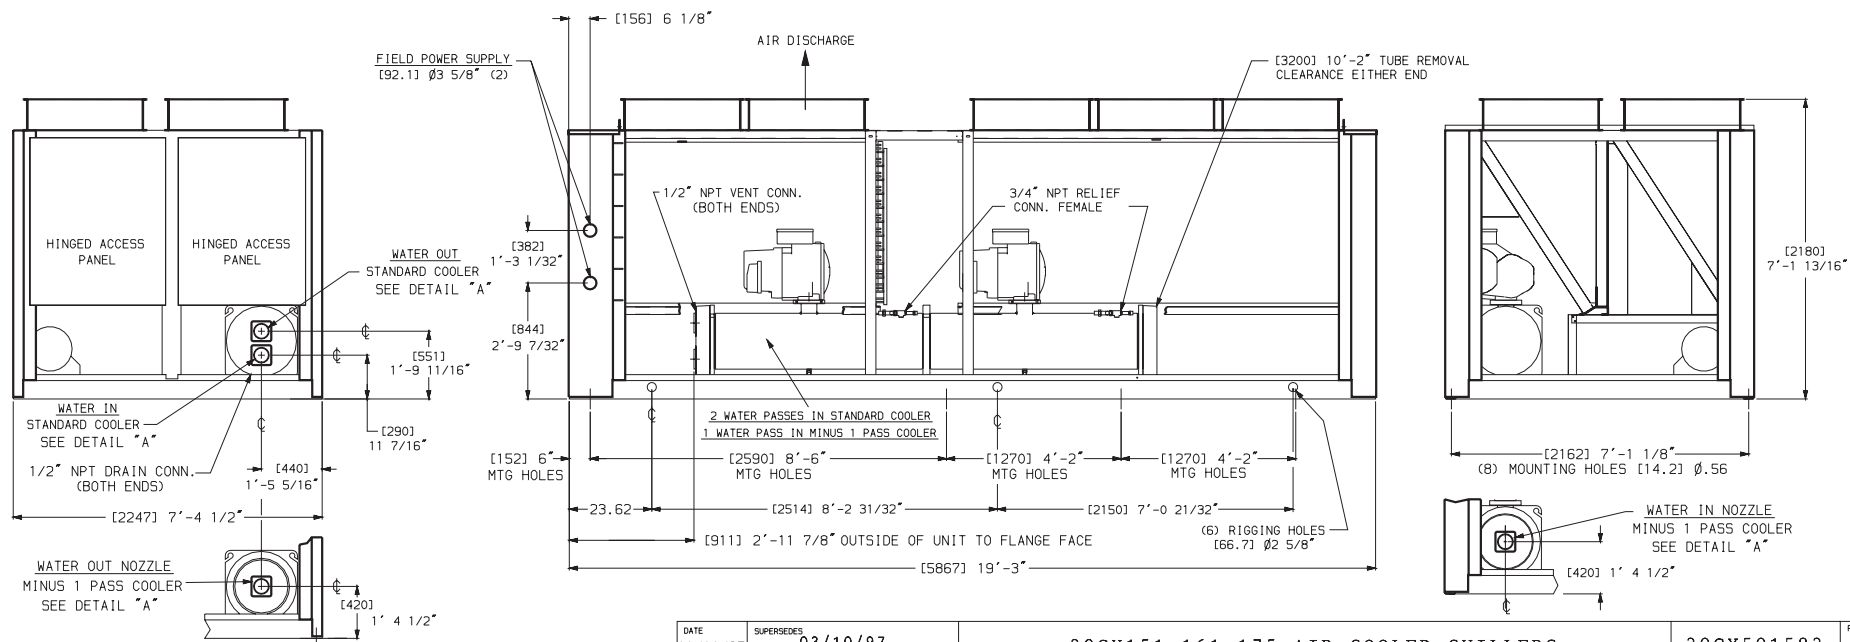

DATE
11/11/97

SUPERSEDES 03/10/97

30GX151,161,175 AIR COOLED CHILLERS

30GX501583

REV
B

CUT ALONG DOTTED LINE

CUT ALONG DOTTED LINE

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES
CARRIER

P O BOX 4808
SYRACUSE N. Y.
13221

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS
PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED
OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE
WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT

UNIT	TOTAL OPERATING WEIGHT - AL	TOTAL OPERATING WEIGHT - CU
30GX176	10056 LB	11421 LB

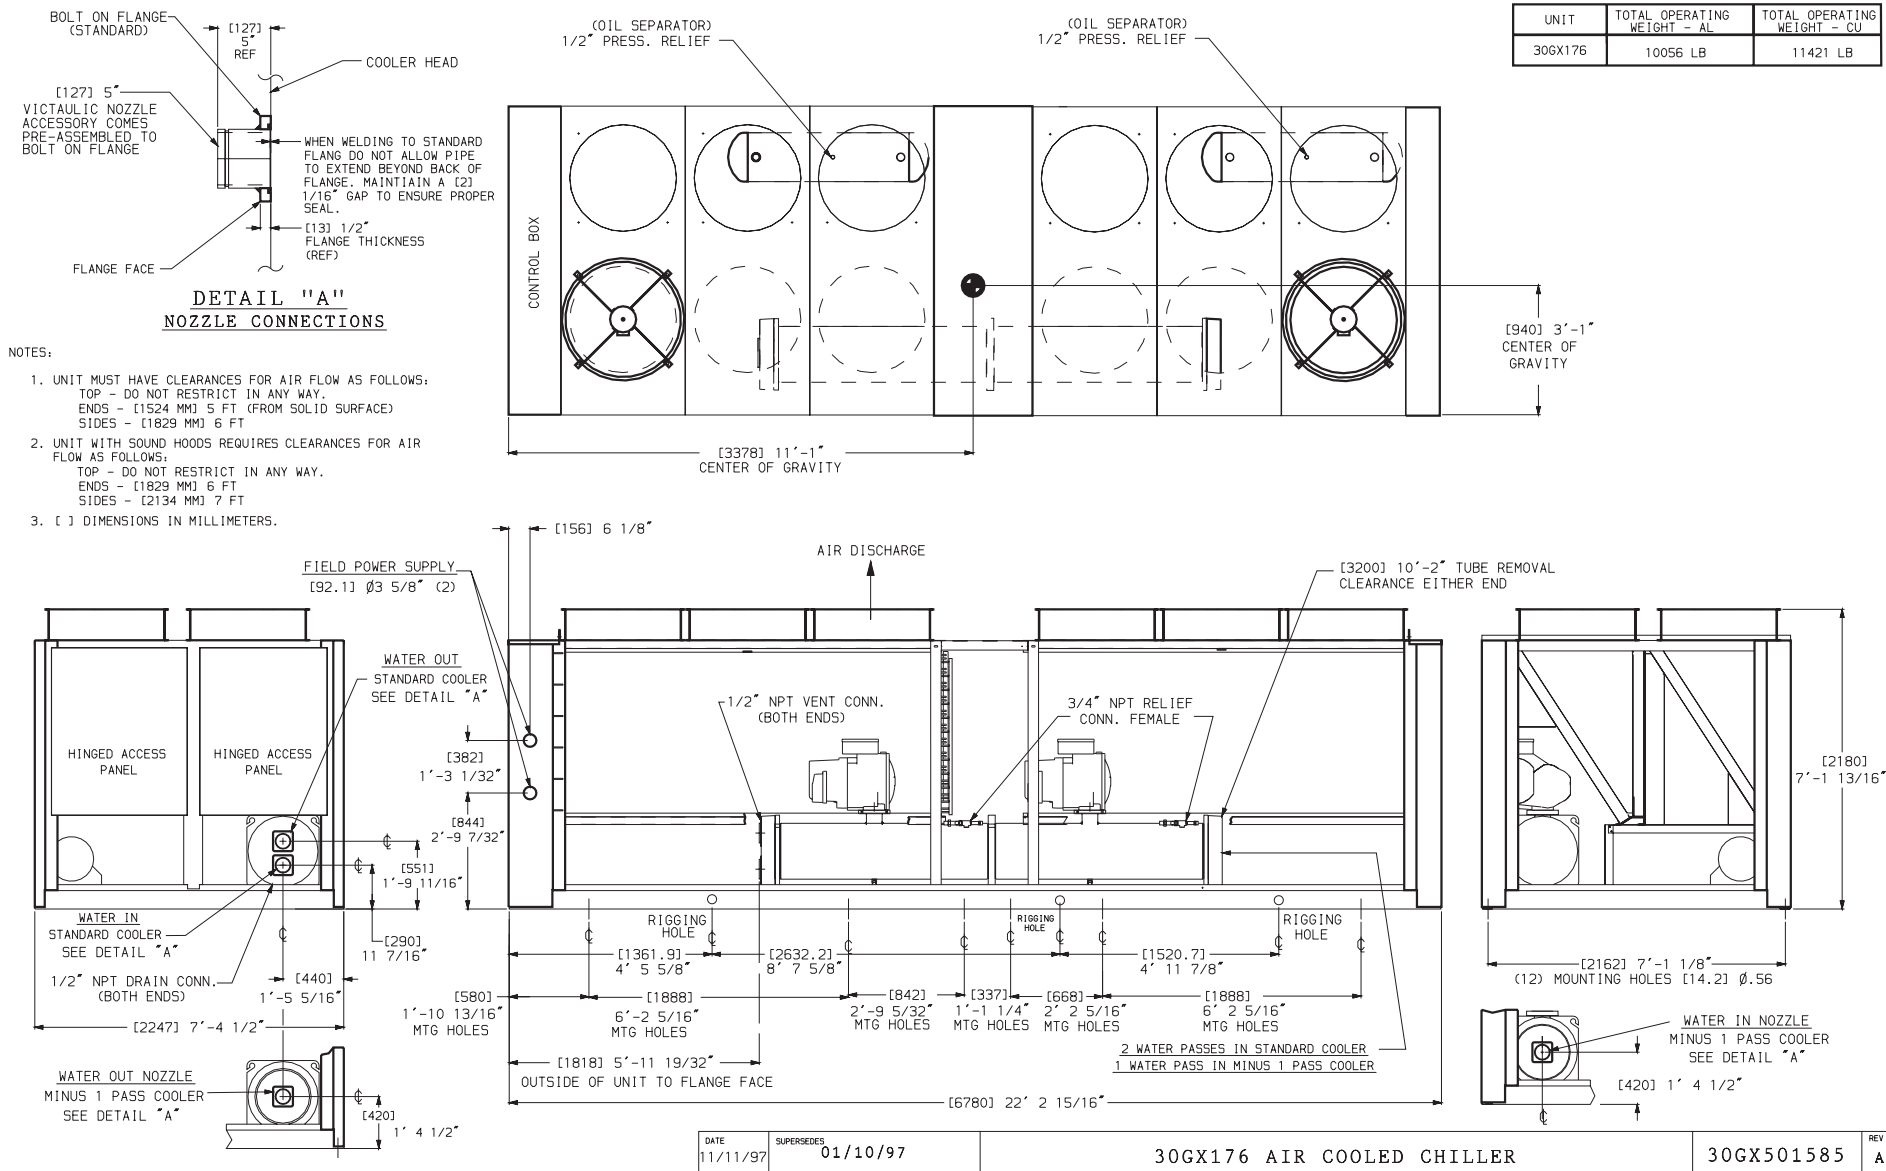

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES
CARRIER



P.O. BOX 4808
SYRACUSE, NY
13221

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE
CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER
CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT.

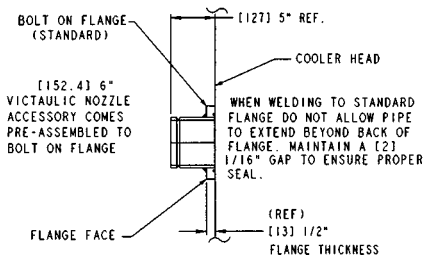


DETAIL "A"
NOZZLE CONNECTIONS

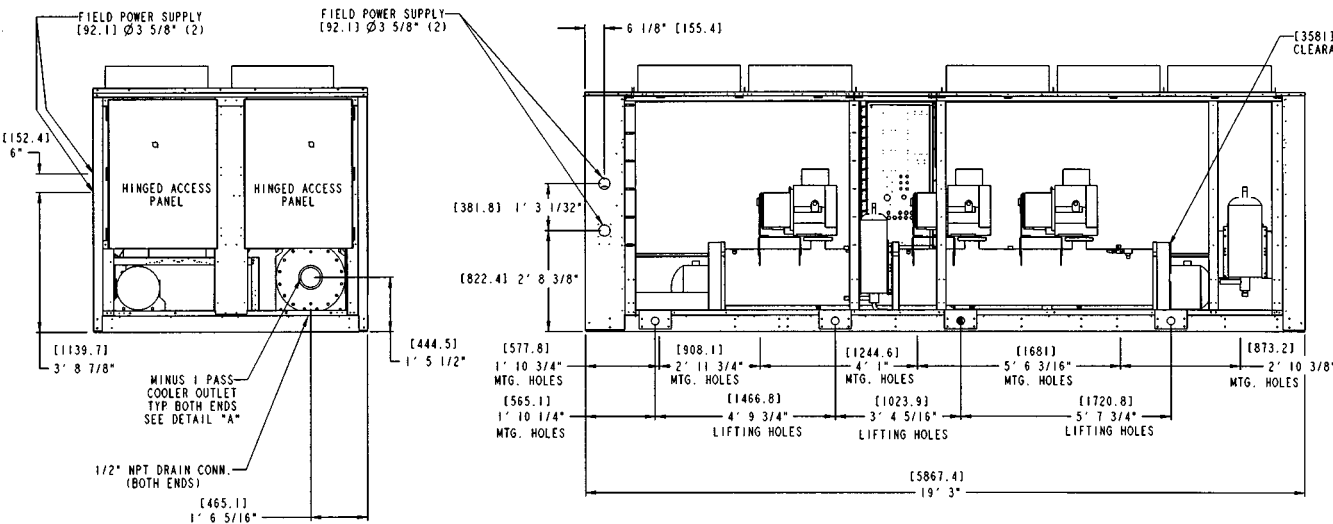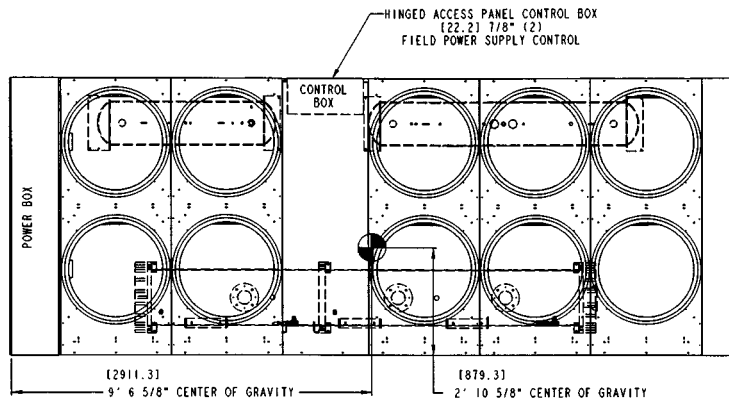

UNIT 30GX	TOTAL OPERATING WEIGHT		TOTAL OPERATING WEIGHT	
	Aluminum Fin		Copper Fin	
	lb	kg	lb	kg
205	12,184	5,538	13,569	6,168
225	12,364	5,620	13,749	6,250

NOTES:

- Unit must have clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1524 mm) 5 ft (from solid surface)
Sides — (1829 mm) 6 ft
- Unit with sound hoods requires clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1829 mm) 6 ft
Sides — (2134 mm) 7 ft
- Center of gravity shown is for aluminum fin coil. See installation instructions for all other values.

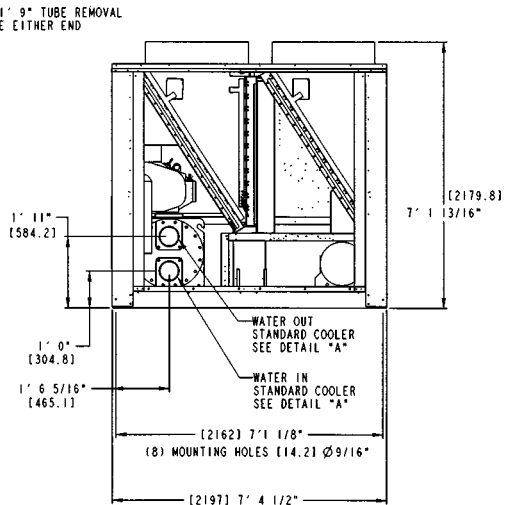

DATE	SUPSEDES	30GX205,225 AIR COOLED CHILLERS	30GX502154	REV
10/02/97	-			-


CERTIFIED DIMENSION PRINT







UNITED
TECHNOLOGIES SYRACUSE, NY
CARRIER 13221

P.O. BOX 4808
THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE
CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER
CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT.

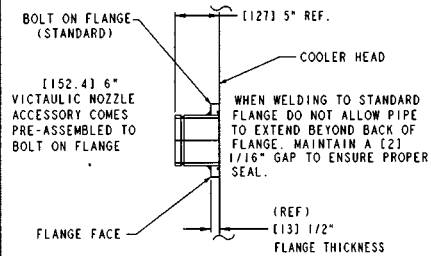

DETAIL "A"
NOZZLE CONNECTIONS

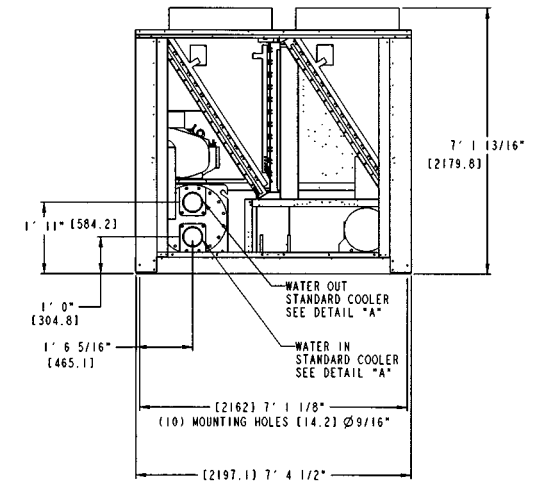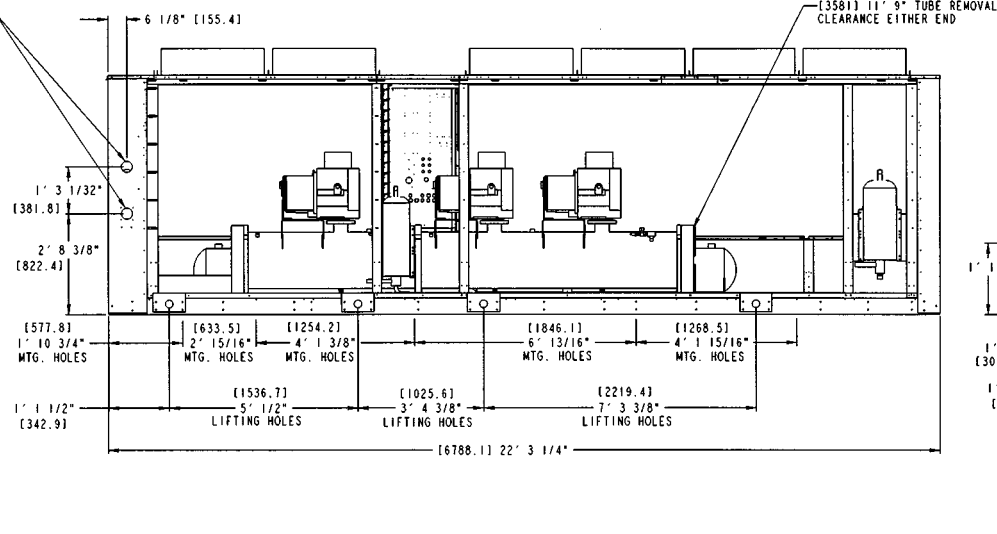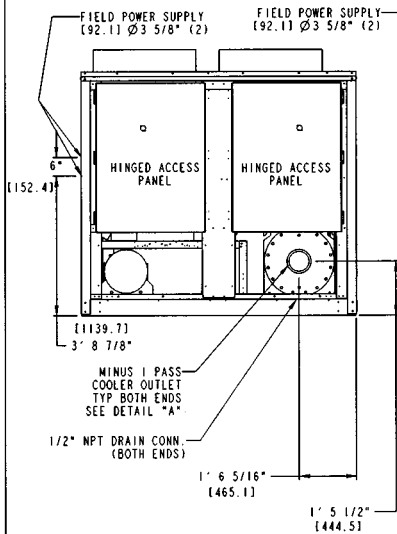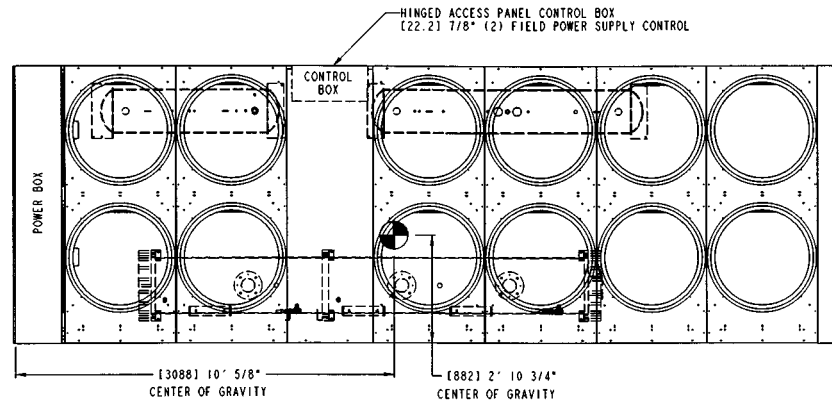

UNIT 30GX	TOTAL OPERATING WEIGHT		TOTAL OPERATING WEIGHT	
	Aluminum Fin		Copper Fin	
	lb	kg	lb	kg
206	12,794	5,815	14,462	6,574
226	12,974	5,897	14,642	6,655
250	13,194	5,997	14,862	6,755

NOTES:

- Unit must have clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1524 mm) 5 ft (from solid surface)
Sides — (1829 mm) 6 ft
- Unit with sound hoods requires clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1829 mm) 6 ft
Sides — (2134 mm) 7 ft
- Center of gravity shown is for aluminum fin coil. See installation instructions for all other values.

DATE	SUPersedes	30GX206,226,250 AIR COOLED CHILLERS	30GX502153	REV
10/02/97	-			-

CERTIFIED DIMENSION PRINT




UNITED
TECHNOLOGIES SYRACUSE, NY
CARRIER


P.O. BOX 4808
SYRACUSE, NY 13221

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE
CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER
CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT.

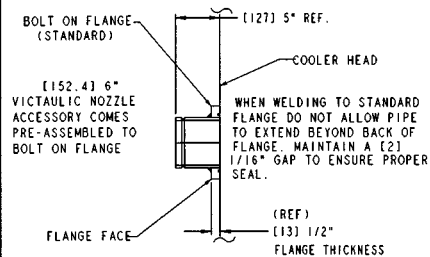



DETAIL "A"
NOZZLE CONNECTIONS

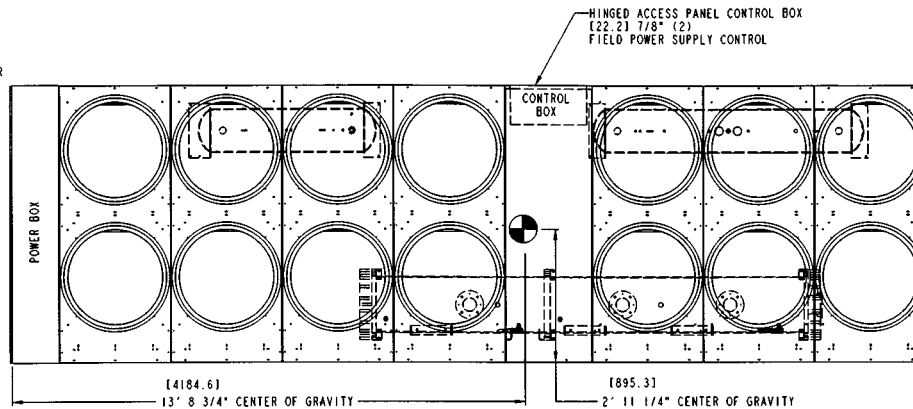

UNIT 30GX	TOTAL OPERATING WEIGHT		TOTAL OPERATING WEIGHT	
	Aluminum Fin		Copper Fin	
	lb	kg	lb	kg
251	13,774	6,621	15,549	7,068
265	13,829	6,286	15,604	7,093

NOTES:

- Unit must have clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1524 mm) 5 ft (from solid surface)
Sides — (1829 mm) 6 ft
- Unit with sound hoods requires clearances for air flow as follows:
Top — Do not restrict in any way
Ends — (1829 mm) 6 ft
Sides — (2134 mm) 7 ft
- Center of gravity shown is for aluminum fin coil. See installation instructions for all other values.

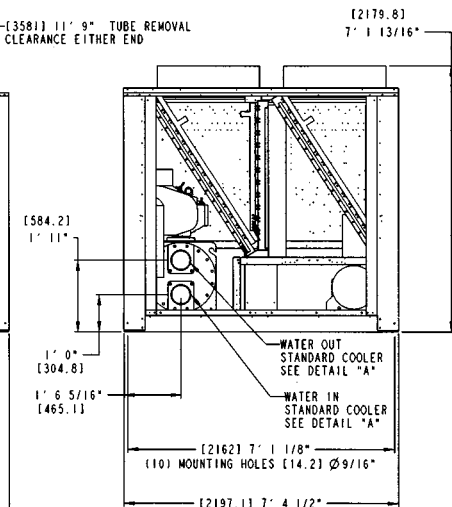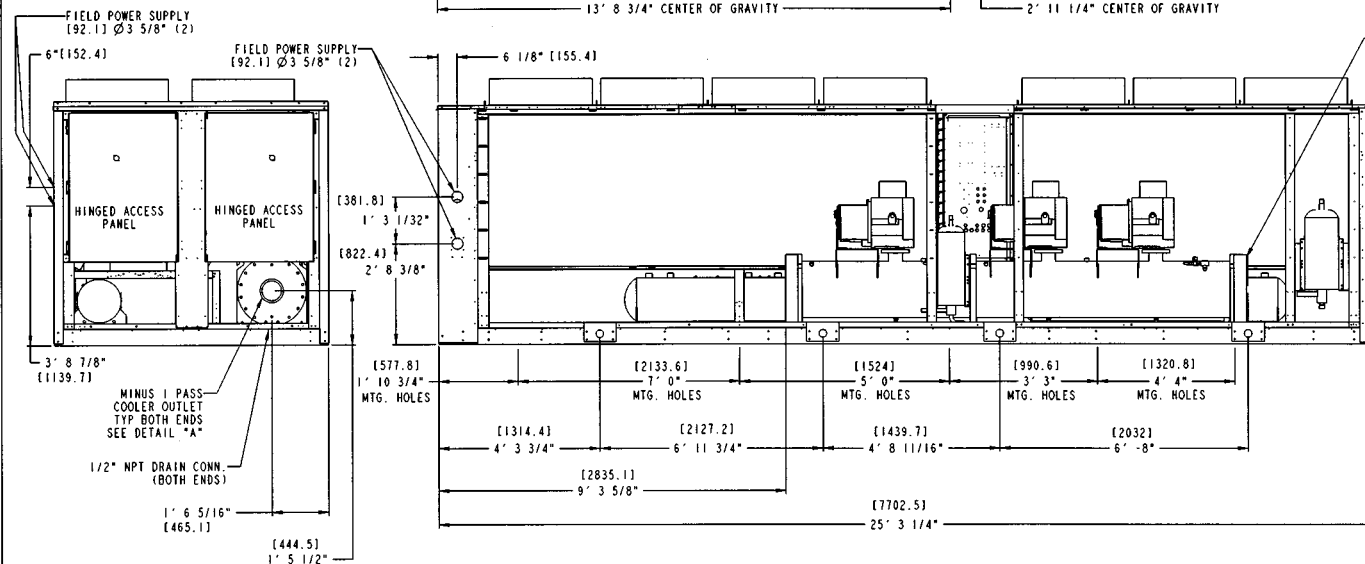

DATE	SUPERSEDES	30GX251,265 AIR COOLED CHILLERS	30GX502152	REV
10/02/97	-			-

FIELD WIRING DIAGRAM



UNITED
TECHNOLOGIES
CARRIER

P.O. BOX 4808
SYRACUSE, N. Y.
13221

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESSED CONDITION THAT THE
CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER
CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT




NOTES:

1. Factory wiring is in accordance with National Electrical Code (NEC). Field modifications or additions must be in compliance with all applicable codes.
2. Wiring for main field power supply must be rated 75° C minimum. Use copper for all units. Maximum incoming wire size for each terminal block is 500 kcmil.
3. Power for control circuit should be supplied from a separate source through a field supplied fused disconnect with 30 amp maximum protection for 115 volt control circuits and 15 amp maximum protection for 230 volt control circuit. Connect control circuit power to terminals 1 and 2 of TB4. Connect neutral side of supply to terminal 2 of TB4. Control circuit conductors for all units must be copper only. 380/415 control power wired at factory. Requires field supplied neutral connection.
4. Terminals 13 and 14 of TB2 are for field external connection for remote ON-OFF. The contacts must be rated for dry circuit application capable of handling a 24 vac to 50 mA load.
5. Terminals 11 and 12 of TB2 are for chilled water flow switch (CWFS) and chilled water pump interlock (CWPI) functions. The contacts must be rated for dry circuit application capable of handling a 24 vac to 50 mA load.
6. Terminals T3 and T4 on relay board are for chilled water pump. The maximum load allowed for the chilled water pump relay is 125 va sealed, 1250 va inrush at 115 or 230 volt.

CCN
CWFS
CWPI
CWPI
EQUIP
GND,GRD
TB

LEGEND

- Carrier Comfort Network
- Chilled Water Flow Switch
- Chilled Water Pump
- Chilled Water Pump Interlock
- Equipment
- Ground
- Terminal Block
- Field Power Wiring
- Field Control Wiring
- Factory Installed Wiring

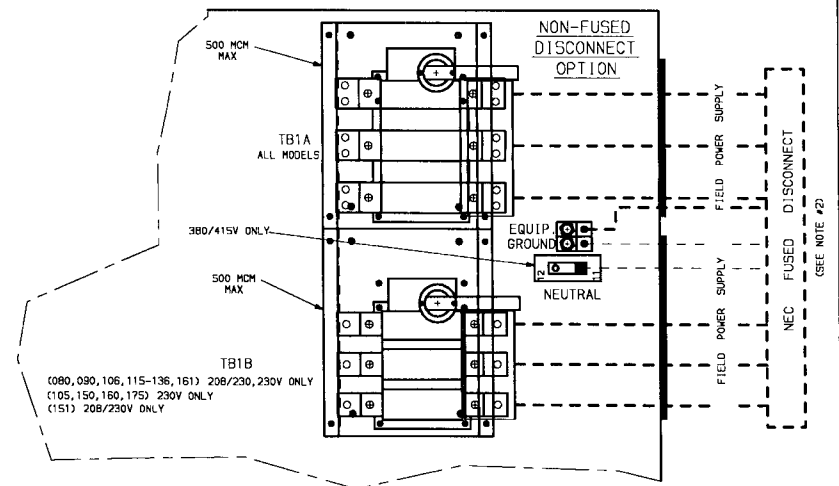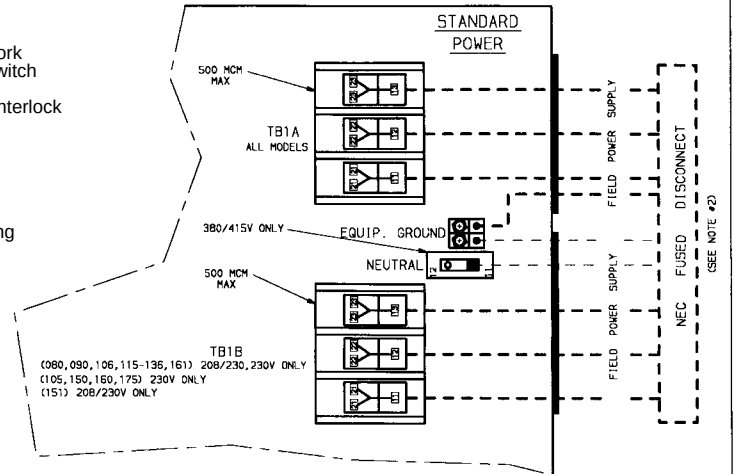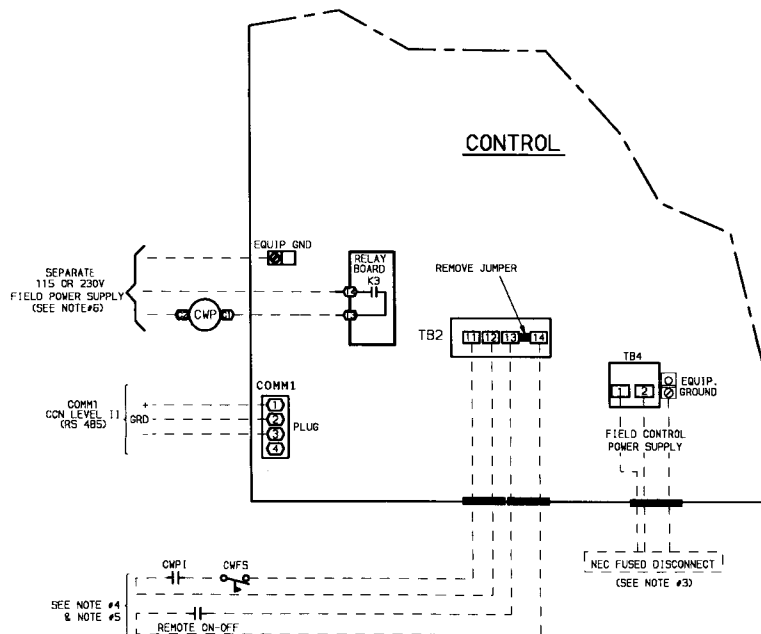

DATE
11/04/96

APPROVED

30GX080-176 LIQUID CHILLERS
FIELD WIRING DIAGRAM

30GX501584

REV

FIELD WIRING DIAGRAM



UNITED
TECHNOLOGIES SYRACUSE, NY
CARRIER


P.O. BOX 4800
13221

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE
CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER
CORPORATION'S WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
DOES NOT CONSTITUTE PART PERFORMANCE OR
ACCEPTANCE OF CONTRACT.



NOTES:

1. Factory wiring is in accordance with National Electrical Code (NEC). Field modifications or additions must be in compliance with all applicable codes.
2. Wiring for main field power supply must be rated 75° C minimum. Use copper for all units. Maximum incoming wire size for each terminal block is 500 kcmil.
3. Power for control circuit should be supplied from a separate source through a field supplied fused disconnect with 30 amp maximum protection for 115 volt control circuits and 15 amp maximum protection for 230 volt control circuit. Connect control circuit power to terminals 1 and 2 of TB4. Connect neutral side of supply to terminal 2 of TB4. Control circuit conductors for all units must be copper only. 380/415 control power wired at factory. Requires field supplied neutral connection.
4. Terminals 13 and 14 of TB2 are for field external connection for remote ON-OFF. The contacts must be rated for dry circuit application capable of handling a 24 vac to 50 mA load.
5. Terminals 11 and 12 of TB2 are for chilled water flow switch (CWFS) and chilled water pump interlock (CWPI) functions. The contacts must be rated for dry circuit application capable of handling a 24 vac to 50 mA load.
6. Terminals T3 and T4 on relay board are for chilled water pump. The maximum load allowed for the chilled water pump relay is 125 va sealed, 1250 va inrush at 115 or 230 volt. Minimum load required is 25 va sealed.

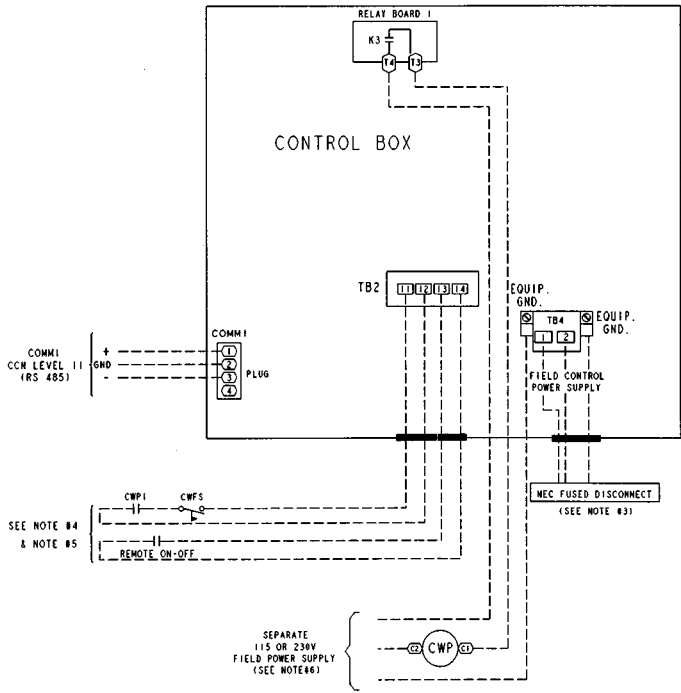

LEGEND

- CCN — Carrier Comfort Network
- CWFS — Chilled Water Flow Switch
- CWP — Chilled Water Pump
- CWPI — Chilled Water Pump Interlock
- EQUIP — Equipment
- GND — Ground
- TB — Terminal Block
- Field Power Wiring
- Field Control Wiring
- Factory Installed Wiring

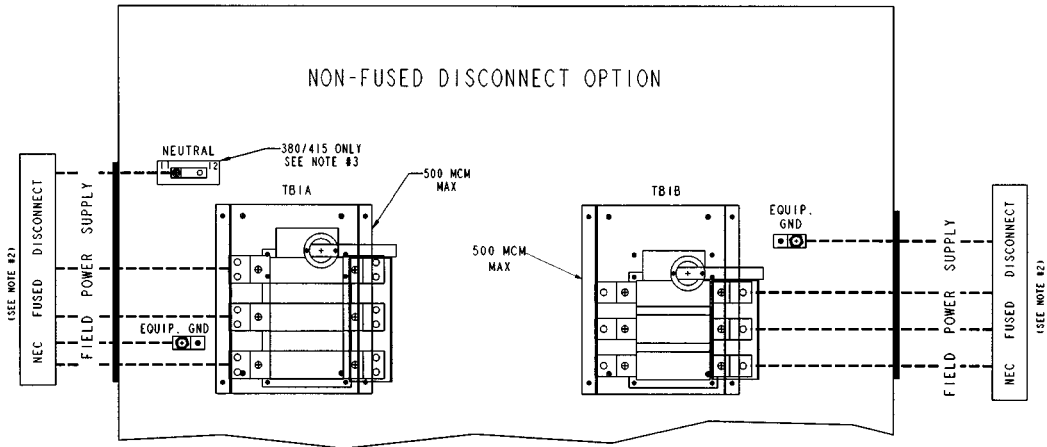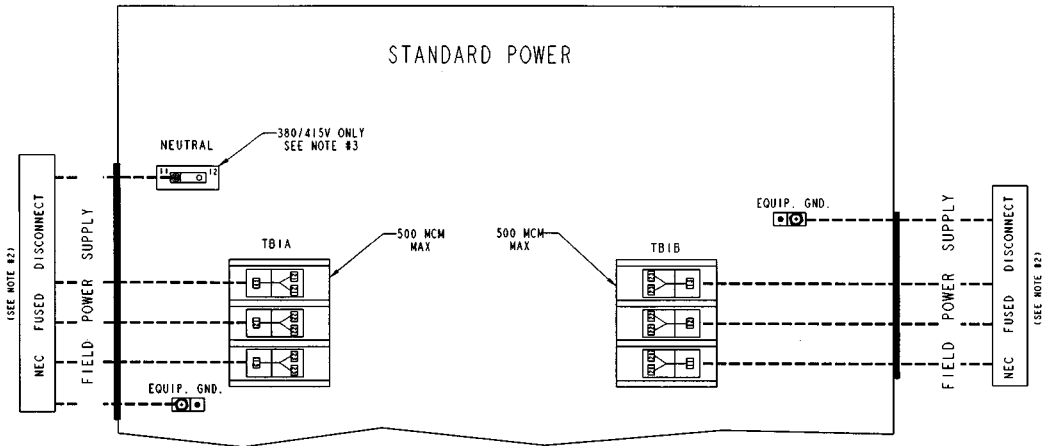

DATE	SUPersedes	30GX205-265 AIR COOLED CHILLER FIELD WIRING DIAGRAM	30GX502155	REV
10/02/97	-			-