


**59SE5A  
Comfort™ Series Single–Stage  
4–Way Multipoise  
Condensing Gas Furnace  
Series 100**



## Product Data

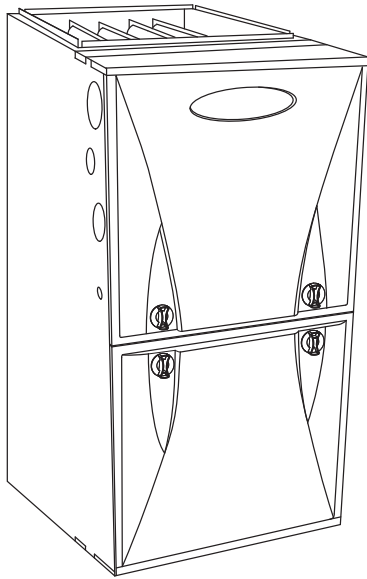

A11263

The 59SE5 Multipoise Comfort Series Condensing Gas Furnace features energy efficiency of up to 93.6% AFUE gas efficiency and workhorse PSC blower motor. This gas furnace also features 4-way multipoise installation flexibility, and is available in three model sizes. The 59SE5 can be vented for direct vent/two-pipe, ventilated combustion air, or single-pipe applications.



ISO 9001  
QMI-SAI Global

Always Ask For  
**FACTORY  
AUTHORIZED  
PARTS**



### STANDARD FEATURES

- 4-way multipoise design for upflow, downflow or horizontal installation. (140,000 BTUH unit limited to upflow, horizontal left and horizontal right positions.)
- Installation flexibility with a 360-degree rotating elbow.
- More than twelve different venting options, including optional through-the-cabinet downflow and horizontal venting.
- Ideal condensing furnace height 35" (889 mm) cabinet: short enough for taller coils, but still allows enough room for service.
- Silicon Nitride Power Heat™ Hot Surface Igniter.
- Aluminized-steel primary heat exchanger.
- Stainless-steel condensing secondary heat exchanger.
- High-quality corrosion-resistant prepainted steel cabinet with hemmed edges for safety.
- Factory-configured ready for upflow applications.
- Direct-vent/sealed combustion, single-pipe venting or ventilated combustion air.
- PSC blower motor, single-speed inducer motor, and single-stage gas valve.
- Self-diagnostics with SuperBrite LED.
- Propane convertible (See accessory list).
- Convenient Air Purifier and Humidifier connections.
- Certified to leak 2% or less of nominal air conditioning CFM delivered when pressurized to 1-in. water column with all present air inlets, air outlets, and condensate drain port(s) sealed.

| SAP ORDERING NO. | CASING DIMENSIONS (IN.) |      |      | RATED HEATING OUTPUT† |       | HEATING AIRFLOW |                      | COOLING CFM @ 0.5 ESP (in WC) | MOTOR HP-SPEED | APPROX SHIP WEIGHT |      |
|------------------|-------------------------|------|------|-----------------------|-------|-----------------|----------------------|-------------------------------|----------------|--------------------|------|
|                  | H                       | D    | W    | (BTUH)                | AFUE  | CFM‡            | Heating ESP (in. WC) |                               |                | LB                 | (KG) |
| 59SE5A100S21--20 | 35                      | 29.5 | 21.0 | 97,000                | 93.4% | 1680            | 0.20                 | 1345–2065                     | 1 - 5          | 173.5              | 78.1 |
| 59SE5A120S24--20 | 35                      | 29.5 | 24.5 | 117,000               | 93.6% | 2245            | 0.20                 | 1320-2105                     | 1 - 5          | 191.0              | 85.9 |
| 59SE5A140S24--20 | 35                      | 29.5 | 24.5 | 135,000               | 93.5% | 2175            | 0.20                 | 1290–2035                     | 1 - 5          | 195.0              | 87.8 |

† Capacity in accordance with DOE test procedures. Ratings are position dependent. See rating plate.

‡ Heating CFM at factory default blower motor heating tap settings.

ESP – External Static Pressure

## FEATURES AND BENEFITS

**Power Heat™ Igniter** — Carrier's unique SiN igniter is not only physically robust but it is also electrically robust. It is capable of running at line voltage and does not require complex voltage regulators as do other brands. This unique feature further enhances the gas furnace reliability and continues Carrier's tradition of technology leadership and innovation in providing a reliable and durable product.

**Reliable Heat Exchanger Design** — The aluminized steel, clam shell primary heat exchanger was re-engineered to achieve greater efficiency out of a smaller size. The first two passes of the heat exchanger are based on the current 80% product, a design with more than ten years of field-proven performance and success. These innovations, paired with the continuation of a crimped, no-weld seam create an efficient, robust design for this essential component.

The condensing heat exchanger, a stainless steel fin and tube design, is positioned in the furnace to extract additional heat. Stainless steel coupling box componentry between heat exchangers has exceptional corrosion resistance in both natural gas and propane applications.

**4-Way Multipoise Design** — One model for all applications – there is no need to stock special downflow or horizontal models when one unit will do it all. (140,000 BTUH unit limited to upflow, horizontal left and horizontal right positions.) The heat exchanger design allows these units to achieve the certified AFUE in all positions.

**Direct or Single-pipe Venting, or Optional Ventilated Combustion Air** — This furnace can be installed as a 2-pipe (Direct Vent) furnace, in an optional ventilated combustion air application, or in single-pipe, non-direct vent applications. This provides added flexibility to meet diverse installation needs.

**Sealed Combustion System** — This furnace brings in combustion air from outside the furnace, which results in especially quiet operation. By sealing the entire combustion vestibule, the entire furnace can be made quieter, not just the burners.

**Monoport Burners** — The burners are specially designed and finely tuned for smooth, quiet combustion and economical operation.

**Bottom Closure** — Factory-installed for side return; easily removable for bottom return. The multi-use bottom closure can also serve for roll-out protection in horizontal applications, and act as the bottom closure for the optional return air base accessory.

**Blower Access Panel Switch** — Automatically shuts off power to furnace whenever blower access panel is opened.

**Quality Registration** — Our furnaces are engineered and manufactured under an ISO 9001 registered quality system.

**Certifications** — This furnace is CSA (AGA and CGA) design certified for use with natural and propane gases. The furnace is factory-shipped for use with natural gas. A CSA listed gas conversion kit is required to convert furnace for use with propane gas. The efficiency is AHRI efficiency rating certified. This furnace meets California Air Quality Management District emission requirements.

## SPECIFICATIONS

| Heating Capacity and Efficiency                    |                                     |              | 100-20                                | 120-20               | 140-20               |
|----------------------------------------------------|-------------------------------------|--------------|---------------------------------------|----------------------|----------------------|
| Input                                              | High Heat                           | (BTUH)       | 100,000                               | 120,000              | 140,000              |
| Output                                             | High Heat                           | (BTUH)       | 97,000                                | 117,000              | 135,000              |
| Efficiency                                         |                                     | AFUE % (ICS) | 93.4                                  | 93.6                 | 93.5                 |
| Certified Temperature Rise Range °F (°C)           |                                     | High Heat    | 40 - 70<br>(22 - 39)                  | 40 - 70<br>(22 - 39) | 45 - 75<br>(25 - 42) |
| Airflow Capacity and Blower Data                   |                                     |              | 100-20                                | 120-20               | 140-20               |
| Rated External Static Pressure (in. WC.)           | Heating                             |              | 0.20                                  | 0.20                 | 0.20                 |
|                                                    | Cooling                             |              | 0.5                                   | 0.5                  | 0.5                  |
| Airflow Delivery @ Rated ESP (CFM)                 | High Heat                           |              | 1680                                  | 2245                 | 2175                 |
|                                                    | Cooling                             |              | 2065                                  | 2105                 | 2035                 |
| Cooling Capacity (tons)                            | 400 CFM/ton                         |              | 5                                     | 5                    | 5                    |
|                                                    | 350 CFM/ton                         |              | 6                                     | 6                    | 6                    |
| Direct-Drive Motor Type                            | Permanent Split Capacitor (PSC)     |              |                                       |                      |                      |
| Direct-Drive Motor HP                              |                                     |              | 1                                     | 1                    | 1                    |
| Motor Full Load Amps                               |                                     |              | 13.8                                  | 14.1                 | 14.1                 |
| RPM Range                                          |                                     |              | 500 -1150                             |                      |                      |
| Speed Selections                                   |                                     |              | 5                                     | 5                    | 5                    |
| Blower Wheel Dia x Width                           |                                     | in.          | 11 x 10                               | 11 x 11              | 11 x 11              |
| Air Filtration System                              |                                     |              | External                              |                      |                      |
| Filter Used for Certified Watt Data*               |                                     |              | KGAWF**06UFR                          |                      |                      |
| Electrical Data                                    |                                     |              | 100-20                                | 120-20               | 140-20               |
| Input Voltage                                      | Volts-Hertz-Phase                   |              | 220-50-1                              |                      |                      |
| Operating Voltage Range                            | Min-Max                             |              | 104-127                               |                      |                      |
| Maximum Input Amps                                 |                                     | Amps         | 14.6                                  | 14.9                 | 14.9                 |
| Unit Ampacity                                      |                                     | Amps         | 19.2                                  | 19.6                 | 19.6                 |
| Minimum Wire Size                                  |                                     | AWG          | 12                                    | 12                   | 12                   |
| Maximum Wire Length @ Minimum Wire Size            |                                     | Feet<br>(M)  | 29<br>(8.8)                           | 29<br>(8.8)          | 29<br>(8.8)          |
| Maximum Fuse/Ckt Bkr (Time-Delay Type Recommended) |                                     | Amps         | 20                                    | 20                   | 20                   |
| Transformer Capacity (24vac output)                |                                     |              | 40 VA                                 |                      |                      |
| External Control Power Available                   | Heating                             |              | 27.9 VA                               |                      |                      |
|                                                    | Cooling                             |              | 34.6 VA                               |                      |                      |
| Controls                                           |                                     |              | 100-20                                | 120-20               | 140-20               |
| Gas Connection Size                                |                                     |              | 1/2" - NPT                            |                      |                      |
| Burners (Monoport)                                 |                                     |              | 5                                     | 6                    | 7                    |
| Gas Valve (Redundant)                              |                                     | Manufacturer | White Rogers                          |                      |                      |
|                                                    | Minimum Inlet Gas pressure (in. wc) |              | 4.5                                   |                      |                      |
|                                                    | Maximum Inlet Gas pressure (in. wc) |              | 13.6                                  |                      |                      |
| Gas Conversion Kit - Natural to Propane            |                                     |              | KGANP53011SP                          |                      |                      |
| Gas Conversion Kit - Propane to Natural            |                                     |              | KGAPN45011SP                          |                      |                      |
| Manufactured (Mobile) Home Kit                     |                                     |              | KGAMH0601KIT                          |                      | N/A                  |
| Ignition Device                                    |                                     |              | Silicon Nitride                       |                      |                      |
| Limit Control                                      |                                     |              | 180                                   | 160                  | 155                  |
| Heating Blower Control (Heating Off-Delay)         |                                     |              | Adjustable: 90, 120, 150, 180 seconds |                      |                      |
| Cooling Blower Control (Time Delay Relay)          |                                     |              | 90 seconds                            |                      |                      |
| Communication System                               |                                     |              | none                                  |                      |                      |
| Thermostat Connections                             |                                     |              | Com 24V, R, W, G, Y                   |                      |                      |
| Accessory Connections                              |                                     |              | EAC (115vac); HUM (24vac)             |                      |                      |

\* See Accessory List for part numbers available.

59SE5A

# MODEL NUMBER NOMENCLATURE


Example of Model Number

| 1 - 2<br>Family | 3<br>Htg. Stages                                    | 4<br>Tier                                                    | 5<br>Base Effy.                                                                              | 6<br>Major Series | 7 - 9<br>Htg. Cap.                                                                                          | 10<br>Motor                                                | 11 - 12<br>Width                                     | 13<br>Voltage | 14<br>Minor Series | 15 - 16<br>Airflow                                                                                                                  |
|-----------------|-----------------------------------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------|---------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| 59              | T                                                   | N                                                            | 6                                                                                            | A                 | 060                                                                                                         | V                                                          | 17                                                   | -             | -                  | 14                                                                                                                                  |
| Family          | S - Single Stage<br>T - Two Stage<br>M - Modulating | C - Comfort<br>P - Performance<br>N - Infinity<br>E - Export | 0 - +90 AFUE<br>2 - +92 AFUE<br>3 - +93 AFUE<br>5 - +95 AFUE<br>6 - +96 AFUE<br>7 - +97 AFUE | Major Series      | 040=40,000 BTU<br>060=60,000 BTU<br>080=80,000 BTU<br>100=100,000 BTU<br>120=120,000 BTU<br>140=140,000 BTU | S - Standard<br>E - Energy Efficient<br>V - Variable Speed | 14 - 14.2"<br>17 - 17.5"<br>21 - 21.0"<br>24 - 24.5" | Voltage       | Minor Series       | 08 - 800 CFM<br>10 - 1000 CFM<br>12 - 1200 CFM<br>14 - 1400 CFM<br>16 - 1600 CFM<br>18 - 1800 CFM<br>20 - 2000 CFM<br>22 - 2200 CFM |

Not all families have these models.

A13049

## FURNACE COMPONENTS

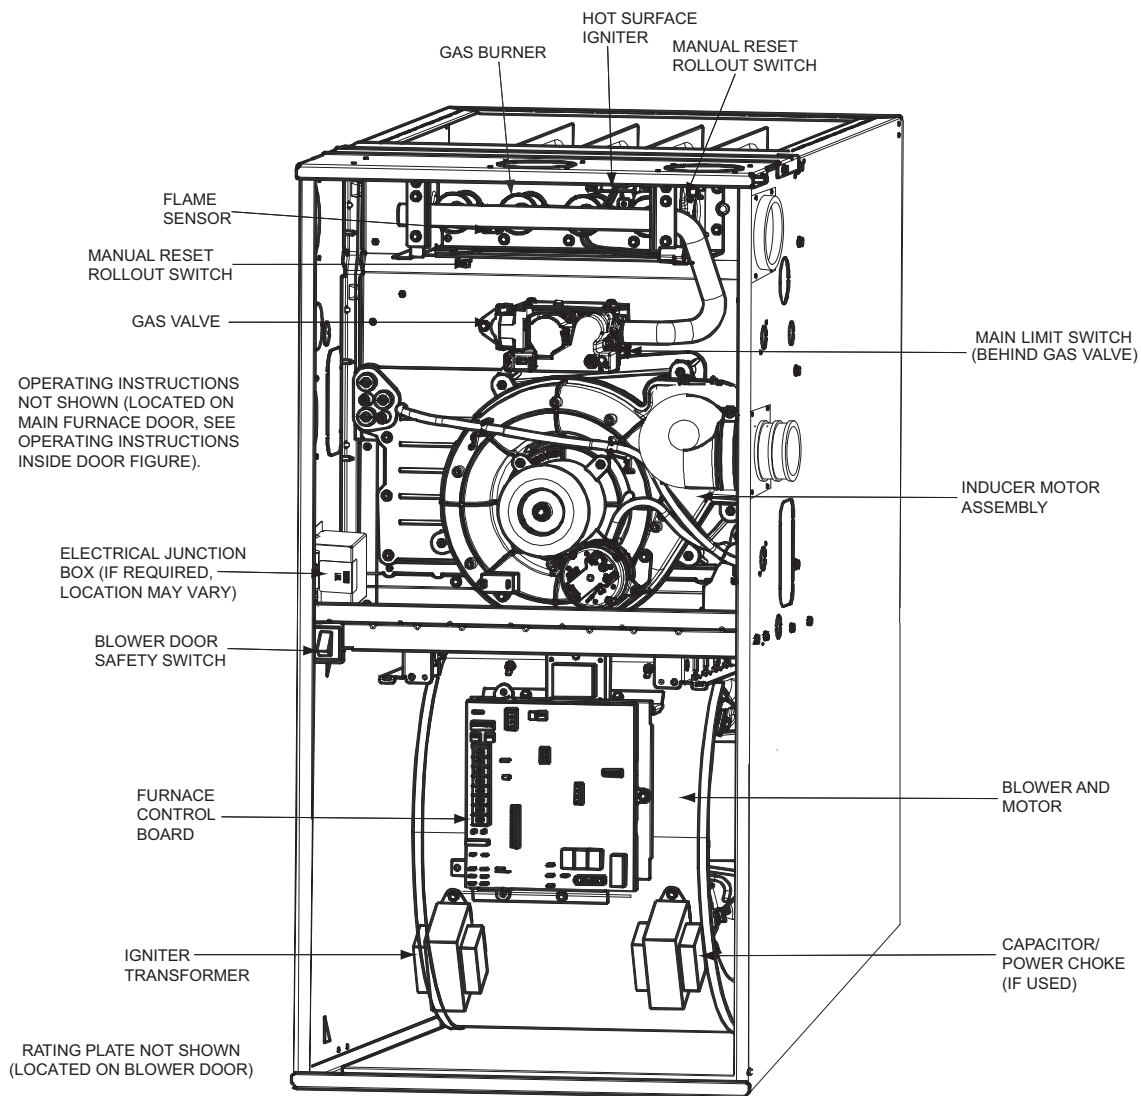

REPRESENTATIVE DRAWING ONLY, SOME MODELS MAY VARY IN APPEARANCE.

A12528

## ACCESSORIES

| DESCRIPTION                                             | PART NUMBER  | 100-20             | 120-20 | 140-20 |
|---------------------------------------------------------|--------------|--------------------|--------|--------|
| <b>Venting Accessories</b>                              |              |                    |        |        |
| Vent Terminal - Concentric - 2" (51 mm)                 | KGAVT0901CVT | See Venting Tables |        |        |
| Vent Terminal - Concentric - 3" (76 mm)                 | KGAVT1001CVT |                    |        |        |
| Vent Terminal Bracket - 2" (51 mm)                      | KGAVT0101BRA |                    |        |        |
| Vent Terminal Bracket - 3" (76 mm)                      | KGAVT0201BRA |                    |        |        |
| Vent Kit – Rubber Coupling                              | KGAAC0101RVC | See Venting Tables |        |        |
| <b>Condensate Drainage Accessories</b>                  |              |                    |        |        |
| External Trap Kit                                       | KGAET0201ETK | ●                  | ●      | ●      |
| <b>Ductwork Adapter Accessories</b>                     |              |                    |        |        |
| Return Air Base (Upflow Applications) 14.0–in. wide     | KGARP0301B14 |                    |        |        |
| Return Air Base (Upflow Applications) 17.5–in. wide     | KGARP0301B17 |                    |        |        |
| Return Air Base (Upflow Applications) 21.0–in. wide     | KGARP0301B21 | ●                  |        |        |
| Return Air Base (Upflow Applications) 24.5–in. wide     | KGARP0301B24 |                    | ●      | ●      |
| <b>Gas Conversion Accessories</b>                       |              |                    |        |        |
| Gas Conversion Kit - Nat to LP                          | KGANP53011SP | ●                  | ●      | ●      |
| Gas Conversion Kit - LP to Nat                          | KGAPN45011SP | ●                  | ●      | ●      |
| Gas Orifice Kit - #42 (Nat Gas)                         | LH32DB207    | ●                  | ●      | ●      |
| Gas Orifice Kit - #43 (Nat Gas)                         | LH32DB202    | ●                  | ●      | ●      |
| Gas Orifice Kit - #44 (Nat Gas)                         | LH32DB200    | ●                  | ●      | ●      |
| Gas Orifice Kit - #45 (Nat Gas)                         | LH32DB205    | ●                  | ●      | ●      |
| Gas Orifice Kit - #46 (Nat Gas)                         | LH32DB208    | ●                  | ●      | ●      |
| Gas Orifice Kit - #47 (Nat Gas)                         | LH32DB078    | ●                  | ●      | ●      |
| Gas Orifice Kit - #48 (Nat Gas)                         | LH32DB076    | ●                  | ●      | ●      |
| Gas Orifice Kit - #54 (LP)                              | LH32DB203    | ●                  | ●      | ●      |
| Gas Orifice Kit - #55 (LP)                              | LH32DB201    | ●                  | ●      | ●      |
| Gas Orifice Kit - #56 (LP)                              | LH32DB206    | ●                  | ●      | ●      |
| Gas Orifice Kit - 1.25mm (LP)                           | LH32DB209    | ●                  | ●      | ●      |
| Gas Orifice Kit - 1.30mm (LP)                           | LH32DB210    | ●                  | ●      | ●      |
| <b>IAQ Accessories</b>                                  |              |                    |        |        |
| Filter Rack – Side Return for 1" Filters                | KGAFR0801SRE | ●                  | ●      | ●      |
| Filter Rack – Bottom Return for 1" Filters – 14.2" wide | KGBFR0401B14 | ●                  | ●      | ●      |
| Filter Rack – Bottom Return for 1" Filters – 17.5" wide | KGBFR0501B17 | ●                  | ●      | ●      |
| Filter Rack – Bottom Return for 1" Filters – 21.0" wide | KGBFR0601B21 | ●                  | ●      | ●      |
| Filter Rack – Bottom Return for 1" Filters – 24.5" wide | KGBFR0701B24 | ●                  | ●      | ●      |
| Filter Pack (6 pack) – Washable - 16x25x1               | KGAWF1306UFR | ●                  | ●      | ●      |
| Filter Pack (6 pack) – Washable - 24x25x1               | KGAWF1506UFR | ●                  | ●      | ●      |

• = Used with the model furnace

## AIR DELIVERY - CFM (BOTTOM RETURN WITH FILTER)

| UNIT SIZE | RETURN AIR CONNECTION              | WIRE COLOR          | COOLING TONS | AIRFLOW DELIVERY @ EXTERNAL STATIC PRESSURE (in. w.c.) |      |      |      |      |      |      |      |      |      |
|-----------|------------------------------------|---------------------|--------------|--------------------------------------------------------|------|------|------|------|------|------|------|------|------|
|           |                                    |                     |              | 0.1                                                    | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  | 0.9  | 1    |
|           |                                    |                     |              | CFM                                                    |      |      |      |      |      |      |      |      |      |
| 100–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 2260                                                   | 2215 | 2165 | 2115 | 2065 | 2010 | 1950 | 1890 | 1825 | 1750 |
|           |                                    | Blue                | 5            | 2140                                                   | 2100 | 2050 | 2005 | 1960 | 1915 | 1855 | 1800 | 1740 | 1680 |
|           |                                    | Yellow              | 4            | 1815                                                   | 1775 | 1735 | 1690 | 1645 | 1600 | 1545 | 1490 | 1420 | 1405 |
|           |                                    | Orange              | 3.5          | 1665                                                   | 1625 | 1575 | 1535 | 1495 | 1455 | 1410 | 1355 | 1300 | 1245 |
|           |                                    | Red                 | 3.5          | 1515                                                   | 1475 | 1435 | 1390 | 1350 | 1310 | 1260 | 1210 | 1160 | 1110 |
| 120–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 2215                                                   | 2160 | 2105 | 2050 | 1990 | 1925 | 1855 | 1785 | 1720 | 1655 |
|           |                                    | Blue                | 5            | 2070                                                   | 2020 | 1975 | 1920 | 1860 | 1800 | 1735 | 1675 | 1615 | 1560 |
|           |                                    | Yellow              | 4            | 1770                                                   | 1725 | 1680 | 1630 | 1570 | 1520 | 1465 | 1420 | 1370 | 1315 |
|           |                                    | Orange              | 3.5          | 1595                                                   | 1550 | 1505 | 1455 | 1410 | 1365 | 1315 | 1270 | 1215 | 1170 |
|           |                                    | Red <sup>5</sup>    | 3.5          | 1460                                                   | 1415 | 1365 | 1315 | 1270 | 1230 | 1180 | 1130 | 1075 | 1015 |
| 140–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 2195                                                   | 2145 | 2090 | 2035 | 1980 | 1915 | 1855 | 1795 | 1735 | 1675 |
|           |                                    | Blue                | 5            | 2055                                                   | 2005 | 1955 | 1905 | 1850 | 1795 | 1740 | 1685 | 1630 | 1575 |
|           |                                    | Yellow              | 4            | 1755                                                   | 1710 | 1660 | 1610 | 1565 | 1515 | 1465 | 1415 | 1365 | 1310 |
|           |                                    | Orange <sup>5</sup> | 3.5          | 1590                                                   | 1540 | 1495 | 1450 | 1400 | 1355 | 1310 | 1260 | 1205 | 1145 |
|           |                                    | Red <sup>5</sup>    | 3.5          | 1450                                                   | 1400 | 1355 | 1310 | 1265 | 1220 | 1175 | 1120 | 1060 | 1015 |

## AIR DELIVERY - L/S (BOTTOM RETURN WITH FILTER)

| UNIT SIZE | RETURN AIR CONNECTION              | WIRE COLOR          | COOLING TONS | AIRFLOW DELIVERY @ EXTERNAL STATIC PRESSURE (in. w.c.) |      |      |     |     |     |     |     |     |     |
|-----------|------------------------------------|---------------------|--------------|--------------------------------------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|
|           |                                    |                     |              | 0.1                                                    | 0.2  | 0.3  | 0.4 | 0.5 | 0.6 | 0.7 | 0.8 | 0.9 | 1   |
|           |                                    |                     |              | L/s                                                    |      |      |     |     |     |     |     |     |     |
| 100–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 1065                                                   | 1045 | 1020 | 995 | 970 | 945 | 920 | 890 | 860 | 825 |
|           |                                    | Blue                | 5            | 1005                                                   | 990  | 965  | 945 | 925 | 900 | 875 | 845 | 820 | 790 |
|           |                                    | Yellow              | 4            | 855                                                    | 835  | 815  | 795 | 775 | 755 | 725 | 700 | 670 | 660 |
|           |                                    | Orange              | 3.5          | 785                                                    | 765  | 740  | 720 | 705 | 685 | 665 | 635 | 610 | 585 |
|           |                                    | Red                 | 3.5          | 715                                                    | 695  | 675  | 655 | 635 | 615 | 590 | 570 | 545 | 520 |
| 120–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 1045                                                   | 1015 | 990  | 965 | 935 | 905 | 875 | 840 | 810 | 780 |
|           |                                    | Blue                | 5            | 975                                                    | 950  | 930  | 905 | 875 | 845 | 815 | 790 | 760 | 735 |
|           |                                    | Yellow              | 4            | 835                                                    | 810  | 790  | 765 | 740 | 715 | 690 | 670 | 645 | 620 |
|           |                                    | Orange              | 3.5          | 750                                                    | 730  | 710  | 685 | 665 | 640 | 620 | 595 | 570 | 550 |
|           |                                    | Red <sup>5</sup>    | 3.5          | 685                                                    | 665  | 640  | 620 | 595 | 580 | 555 | 530 | 505 | 475 |
| 140–20    | BOTTOM or TWO–SIDES <sup>3,4</sup> | Black               | 5            | 1035                                                   | 1010 | 985  | 960 | 930 | 900 | 875 | 845 | 815 | 790 |
|           |                                    | Blue                | 5            | 965                                                    | 945  | 920  | 895 | 870 | 845 | 820 | 795 | 765 | 740 |
|           |                                    | Yellow              | 4            | 825                                                    | 805  | 780  | 755 | 735 | 715 | 690 | 665 | 640 | 615 |
|           |                                    | Orange <sup>5</sup> | 3.5          | 750                                                    | 725  | 705  | 680 | 660 | 635 | 615 | 590 | 565 | 540 |
|           |                                    | Red <sup>5</sup>    | 3.5          | 680                                                    | 660  | 635  | 615 | 595 | 575 | 550 | 525 | 500 | 475 |

**NOTE:**

- A filter is required for each return–air inlet. Airflow performance includes a 3/4–in. (19 mm) washable filter media such as contained in a factory–authorized accessory filter rack. See accessory list. To determine airflow performance without this filter, assume an additional 0.1 in. w.c.. available external static pressure.
- Blower speed taps are not always in the same order. Factory default blower connections are as follows:
  - Heating airflow – BLUE (also used for Continuous Fan)
  - Cooling airflow – BLACK (enabled when the Y terminal is energized)

**ADJUST THE BLOWER SPEED TAPS AS NECESSARY FOR THE PROPER AIR TEMPERATURE RISE FOR EACH INSTALLATION.**
- Airflows over 1800 CFM require bottom return, two–side return, or bottom and side return. A minimum filter size of 20" x 25" (508 x 635 mm) is required.
- For upflow applications, air entering from one side into both the side of the furnace and a return air base counts as a side and bottom return.
- Highlighted areas indicate that this airflow range is beyond the range allowed for heating. **THESE AIRFLOW RANGES MAY ONLY BE USED FOR COOLING.**

## MAXIMUM EQUIVALENT VENT LENGTH - FT. (M)

**Table 1 – Maximum Equivalent Vent Length)**  
**0 to 4500 Ft. (0 to 1370 M) Altitude**


**NOTE:** Maximum Equivalent Vent Length (MEVL) includes standard and concentric vent termination and does NOT include elbows.  
 Use Table 2 – Deductions from Maximum Equivalent Vent Length to determine allowable vent length for each application.

| Altitude<br>FT (M)             | Unit Size<br>BTU/Hr | DIRECT VENT (2-PIPE) AND NON-DIRECT VENT (1-PIPE) |       |       |        |     |        |     |        |
|--------------------------------|---------------------|---------------------------------------------------|-------|-------|--------|-----|--------|-----|--------|
|                                |                     | Vent Pipe Diameter (in.)                          |       |       |        |     |        |     |        |
|                                |                     | 2                                                 |       | 2-1/2 |        | 3   |        | 4   |        |
| 0 to 2000<br>(0 to 610)        | 100,000             | 20                                                | (6.1) | 65    | (19.8) | 205 | (62.5) | 265 | (80.8) |
|                                | 120,000             | NA                                                |       | 15    | (4.6)  | 100 | (30.5) | 250 | (76.2) |
|                                | 140,000*            | NA                                                |       | NA    |        | 20  | (6.1)  | 90  | (27.4) |
| 2001 to 3000<br>(610 to 914)   | 100,000             | 17                                                | (5.2) | 58    | (17.7) | 188 | (57.3) | 250 | (76.2) |
|                                | 120,000             | NA                                                |       | 11    | (3.4)  | 93  | (28.3) | 237 | (72.2) |
|                                | 140,000*            | NA                                                |       | NA    |        | 13  | (4.0)  | 68  | (20.7) |
| 3001 to 4000<br>(914 to 1219)  | 100,000             | 13                                                | (4.0) | 52    | (15.8) | 170 | (51.8) | 236 | (71.9) |
|                                | 120,000             | NA                                                |       | 8     | (2.4)  | 86  | (26.2) | 224 | (68.3) |
|                                | 140,000*            | NA                                                |       | NA    |        | 6   | (1.8)  | 46  | (14.0) |
| 4001 to 4500<br>(1219 to 1370) | 100,000             | 11                                                | (3.4) | 49    | (14.9) | 161 | (49.1) | 229 | (69.8) |
|                                | 120,000             | NA                                                |       | NA    |        | 83  | (25.3) | 217 | (66.1) |
|                                | 140,000*            | NA                                                |       | NA    |        | NA  |        | 35  | (10.7) |


**NOTES:** See notes at end of venting tables.

See Table 3 for altitudes over 4500 ft. (1370 M)


### ELBOW CONFIGURATIONS



Long




Medium




Mitered

### VENT TERMINAL CONFIGURATIONS



Concentric

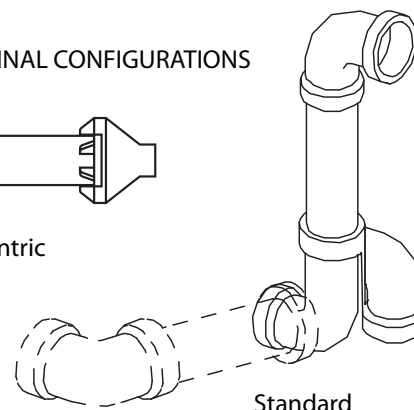

Standard

A11580

**Table 2 – Deductions from Maximum Equivalent Vent Length**

| Pipe Diameter (in.):    | 2   |       | 2-1/2 |       | 3   |       | 4   |       |
|-------------------------|-----|-------|-------|-------|-----|-------|-----|-------|
| Mitered 90° Elbow       | 8   | (2.4) | 8     | (2.4) | 8   | (2.4) | 8   | (2.4) |
| Medium Radius 90° Elbow | 5   | (1.5) | 5     | (1.5) | 5   | (1.5) | 5   | (1.5) |
| Long Radius 90° Elbow   | 3   | (0.9) | 3     | (0.9) | 3   | (0.9) | 3   | (0.9) |
| Mitered 45° Elbow       | 4   | (1.2) | 4     | (1.2) | 4   | (1.2) | 4   | (1.2) |
| Medium Radius 45° Elbow | 2.5 | (0.8) | 2.5   | (0.8) | 2.5 | (0.8) | 2.5 | (0.8) |
| Long Radius 45° Elbow   | 1.5 | (0.5) | 1.5   | (0.5) | 1.5 | (0.5) | 1.5 | (0.5) |
| Tee                     | 16  | (4.9) | 16    | (4.9) | 16  | (4.9) | 16  | (4.9) |

### Venting System Length Calculations

The Total Equivalent Vent Length (TEVL) for **EACH** combustion air or vent pipe equals the length of the venting system, plus the equivalent length of elbows used in the venting system from Table 2.

Standard vent terminations or factory accessory concentric vent terminations count for zero deduction.

See vent system manufacturer's data for equivalent lengths of flexible vent pipe or other termination systems. **DO NOT ASSUME** that one foot of flexible vent pipe equals one foot of straight PVC/ABS DWV vent pipe.

Compare the Total Equivalent Vent Length to the Maximum Equivalent Vent Lengths in Tables 1 and 3.

**Example 1**

A direct-vent 140,000 Btuh furnace installed at 2100 ft. (640 M). Venting system includes, **FOR EACH PIPE**, 52 feet (16 M) of vent pipe, 50 feet (15 M) of combustion air inlet pipe, (3) 90° long radius elbows, (2) 45° long radius elbows and a factory accessory concentric vent kit.

Can this application use 4-in. (102 mm ND) PVC/ABS DWV vent piping?

|                                                                                                                     |   |   |                  |   |                    |                                                                 |
|---------------------------------------------------------------------------------------------------------------------|---|---|------------------|---|--------------------|-----------------------------------------------------------------|
| Measure the required linear length of air inlet and vent pipe; insert the longest of the two here:                  |   |   |                  |   | 52 ft.<br>(16 M)   | Use length of the longer of the vent or air inlet piping system |
| Add equiv length of (3) 90° long-radius elbows (use the highest number of elbows for either the vent or inlet pipe) | 3 | x | 3 ft.<br>(0.9 M) | = | 9 ft.<br>(2.7 M)   | From Table 2                                                    |
| Add equiv length of (2) 45° long-radius elbows (use the highest number of elbows for either the vent or inlet pipe) | 2 | x | 2 ft.<br>(.6 M)  | = | 4 ft.<br>(1.2 M)   | From Table 2                                                    |
| Add equiv length of vent termination                                                                                |   |   |                  |   | 0 ft.              | From Table 2                                                    |
| Add correction for flexible vent pipe, if any                                                                       |   |   |                  |   | 0 ft.              | From Vent Manufacturer's instructions; zero for PVC/ABS DWV     |
| Total Equivalent Vent Length (TEVL)                                                                                 |   |   |                  |   | 65 ft.<br>(20 M)   | Add all of the above lines                                      |
| Maximum Equivalent Vent Length (MEVL)                                                                               |   |   |                  |   | 68 ft.<br>(20.7 M) | For 4" (102 mm) pipe from Table 1                               |
| Is TEVL less than MEVL?                                                                                             |   |   |                  |   | <b>YES</b>         | <b>Therefore, 4" (102 mm) pipe may be used</b>                  |

**Example 2**

A direct-vent 140,000 Btuh furnace installed at 1800 ft. (549 M) Venting system includes, **FOR EACH PIPE**, 31 feet (9 M) of vent pipe, 30 feet (9 M) of combustion air inlet pipe, (3) 90° long radius elbows, and a polypropylene concentric vent kit. Also includes 20 feet (6 M) of flexible polypropylene vent pipe, included within the 68 feet (21 M) of vent pipe.

Assume that one meter of flexible 3-in. or 4-in. polypropylene pipe equals 1.8 Meters of PVC/ABS pipe. **VERIFY FROM VENT MANUFACTURER'S INSTRUCTIONS.**

Can this application use 3-in. vent piping? If not what size piping can be used?

|                                                                                                                     |     |   |                  |   |                    |                                                                 |
|---------------------------------------------------------------------------------------------------------------------|-----|---|------------------|---|--------------------|-----------------------------------------------------------------|
| Measure the required linear length of air inlet and vent pipe; insert the longest of the two here:                  |     |   |                  |   | 31 ft.<br>(9 M)    | Use length of the longer of the vent or air inlet piping system |
| Add equiv length of (3) 90° long-radius elbows (use the highest number of elbows for either the vent or inlet pipe) | 3   | x | 3 ft.<br>(0.9 M) | = | 9 ft.<br>(2.7 M)   | From Vent Manufacturer's instructions                           |
| Add equiv length of (2) 45° long-radius elbows (use the highest number of elbows for either the vent or inlet pipe) | 0   | x |                  | = | 0 ft.              | From Vent Manufacturer's instructions                           |
| Add equiv length of vent termination                                                                                | 9   | x | 3.3 ft.<br>(1 M) | = | 30 ft.<br>(9 M)    | From Vent Manufacturer's instructions                           |
| Add correction for flexible vent pipe, if any                                                                       | 1.8 | x | 10 ft.<br>(3 M)  | = | 18 ft.<br>(5.5 M)  | From Vent Manufacturer's instructions                           |
| Total Equivalent Vent Length (TEVL)                                                                                 |     |   |                  |   | 88 ft.<br>(26.8 M) | Add all of the above lines                                      |
| Maximum Equivalent Vent Length (MEVL)                                                                               |     |   |                  |   | 20 ft.<br>(6 M)    | For 3" pipe from Table 1                                        |
| Is TEVL less than MEVL?                                                                                             |     |   |                  |   | <b>NO</b>          | <b>Therefore, 3-in. pipe may NOT be used; try 4-in.</b>         |
| Maximum Equivalent Vent Length (MEVL)                                                                               |     |   |                  |   | 90 ft.<br>(27.4 M) | For 4" pipe from Table 1                                        |
| Is TEVL less than MEVL?                                                                                             |     |   |                  |   | <b>YES</b>         | <b>Therefore, 4" pipe MAY be used.</b>                          |

**Table 3 – Maximum Equivalent Vent Length)  
4501 to 10,000 Ft. (0 to 1370 M) Altitude**

**NOTE: Maximum Equivalent Vent Length (MEVL) includes standard and concentric vent termination and does NOT include elbows. Use Table 2 – Deductions from Maximum Equivalent Vent Length to determine allowable vent length for each application.**

| Altitude<br>FT (M)                       | Unit Size | DIRECT VENT (2-PIPE) AND NON-DIRECT VENT (1-PIPE) |           |            |            |
|------------------------------------------|-----------|---------------------------------------------------|-----------|------------|------------|
|                                          |           | Vent Pipe Diameter                                |           |            |            |
|                                          |           | 2                                                 | 2-1/2     | 3          | 4          |
| <b>4501 to 5000<br/>(1370 to 1524)</b>   | 100,000   | 10 (3.0)                                          | 46 (14.0) | 153 (46.6) | 222 (67.7) |
|                                          | 120,000   | NA                                                | NA        | 80 (24.4)  | 211 (64.3) |
|                                          | 140,000*  | NA                                                | NA        | NA         | 25 (7.6)   |
| <b>5001 to 6000<br/>(1524 to 1829)</b>   | 100,000   | 7 (2.1)                                           | 39 (11.9) | 137 (41.8) | 208 (63.4) |
|                                          | 120,000   | NA                                                | NA        | 74 (22.6)  | 199 (60.7) |
|                                          | 140,000*  | NA                                                | NA        | NA         | 5 (1.5)    |
| <b>6001 to 7000<br/>(1829 to 2134)</b>   | 100,000   | 5 (1.5)                                           | 34 (10.4) | 121 (36.9) | 195 (59.4) |
|                                          | 120,000   | NA                                                | NA        | 68 (20.7)  | 187 (57.0) |
|                                          | 140,000*  | NA                                                | NA        | NA         | NA         |
| <b>7001 to 8000<br/>(2134 to 2438)</b>   | 100,000   | NA                                                | 28 (8.5)  | 106 (32.3) | 182 (55.5) |
|                                          | 120,000   | NA                                                | NA        | 62 (18.9)  | 175 (53.3) |
|                                          | 140,000*  | NA                                                | NA        | NA         | NA         |
| <b>8001 to 9000<br/>(2438 to 2743)</b>   | 100,000   | NA                                                | 23 (7.0)  | 91 (27.7)  | 170 (51.8) |
|                                          | 120,000   | NA                                                | NA        | 56 (17.1)  | 164 (50.0) |
|                                          | 140,000*  | NA                                                | NA        | NA         | NA         |
| <b>9001 to 10,000<br/>(2743 to 3048)</b> | 100,000   | NA                                                | 17 (5.2)  | 77 (23.5)  | 157 (47.9) |
|                                          | 120,000   | NA                                                | NA        | 51 (15.5)  | 153 (46.6) |
|                                          | 140,000*  | NA                                                | NA        | NA         | NA         |

**NOTES:**

1. Use only the vent pipe sizes shown for each furnace. It is NOT necessary to choose the smallest diameter pipe possible for venting.
2. NA – Not allowed. Pressure switch will not close, or flame disturbance may result.
3. Size both the combustion air and vent pipe independently, then use the larger size for both pipes.
4. Assume the two 45° elbows equal one 90° elbow. Wide radius elbows are desirable and may be required in some cases.
5. Elbow and pipe sections within the furnace casing and at the vent termination should not be included in vent length or elbow count.
6. The minimum pipe length is 5 ft. (2 M) linear feet (meters) for all applications.
7. Use 3-in. (76 mm) diameter vent termination kit for installations requiring 4-in. (102 mm) diameter pipe.


# MAXIMUM ALLOWABLE EXPOSED VENT LENGTHS INSULATION TABLE - FT. (M)

| Maximum Length of Uninsulated and Insulated Vent Pipe-Ft (M) |                            |                        |                          |      |       |      |       |                             |      |       |      |       |                              |      |       |      |       |
|--------------------------------------------------------------|----------------------------|------------------------|--------------------------|------|-------|------|-------|-----------------------------|------|-------|------|-------|------------------------------|------|-------|------|-------|
| Single Stage Furnace Input                                   | Winter Design Temp °F (°C) | Pipe Length in Ft. & M | No Insulation            |      |       |      |       | 3/8-in. (9.5 mm) Insulation |      |       |      |       | 1/2-in. (12.7 mm) Insulation |      |       |      |       |
|                                                              |                            |                        | Pipe Diameter – in. (mm) |      |       |      |       | Pipe Diameter – in. (mm)    |      |       |      |       | Pipe Diameter – in. (mm)     |      |       |      |       |
|                                                              |                            |                        | 1 1/2                    | 2    | 2 1/2 | 3    | 4     | 1 1/2                       | 2    | 2 1/2 | 3    | 4     | 1 1/2                        | 2    | 2 1/2 | 3    | 4     |
|                                                              |                            |                        | (38)                     | (51) | (64)  | (76) | (102) | (38)                        | (51) | (64)  | (76) | (102) | (38)                         | (51) | (64)  | (76) | (102) |
| 100,000                                                      | 20 (-10)                   | Ft.                    | N/A                      | 25   | 99    | 89   | 78    | N/A                         | 25   | 110   | 233  | 265   | N/A                          | 25   | 110   | 235  | 229   |
|                                                              |                            | M                      | N/A                      | 7.6  | 30.2  | 27.1 | 23.8  | N/A                         | 7.6  | 33.5  | 71.0 | 80.8  | N/A                          | 7.6  | 33.5  | 71.6 | 69.8  |
|                                                              | 0 (-20)                    | Ft.                    | N/A                      | 25   | 55    | 46   | 33    | N/A                         | 25   | 110   | 145  | 117   | N/A                          | 25   | 110   | 173  | 140   |
|                                                              |                            | M                      | N/A                      | 7.6  | 16.8  | 14.0 | 10.1  | N/A                         | 7.6  | 33.5  | 44.2 | 35.7  | N/A                          | 7.6  | 33.5  | 52.7 | 42.7  |
|                                                              | -20 (-30)                  | Ft.                    | N/A                      | 25   | 34    | 24   | 11    | N/A                         | 25   | 110   | 103  | 79    | N/A                          | 25   | 110   | 124  | 97    |
|                                                              |                            | M                      | N/A                      | 7.6  | 10.4  | 7.3  | 3.4   | N/A                         | 7.6  | 33.5  | 31.4 | 24.1  | N/A                          | 7.6  | 33.5  | 37.8 | 29.6  |
|                                                              | -40 (-40)                  | Ft.                    | N/A                      | 23   | 20    | 11   | 0     | N/A                         | 25   | 95    | 77   | 55    | N/A                          | 25   | 110   | 94   | 70    |
|                                                              |                            | M                      | N/A                      | 7.0  | 6.1   | 3.4  | 0.0   | N/A                         | 7.6  | 29.0  | 23.5 | 16.8  | N/A                          | 7.6  | 33.5  | 28.7 | 21.3  |
| 120,000                                                      | 20 (-10)                   | Ft.                    | N/A                      | N/A  | 15    | 99   | 86    | N/A                         | N/A  | 15    | 100  | 219   | N/A                          | N/A  | 15    | 100  | 250   |
|                                                              |                            | M                      | N/A                      | N/A  | 4.6   | 30.2 | 26.2  | N/A                         | N/A  | 4.6   | 30.5 | 66.8  | N/A                          | N/A  | 4.6   | 30.5 | 76.2  |
|                                                              | 0 (-20)                    | Ft.                    | N/A                      | N/A  | 15    | 51   | 38    | N/A                         | N/A  | 15    | 100  | 130   | N/A                          | N/A  | 15    | 100  | 156   |
|                                                              |                            | M                      | N/A                      | N/A  | 4.6   | 15.5 | 11.6  | N/A                         | N/A  | 4.6   | 30.5 | 39.6  | N/A                          | N/A  | 4.6   | 30.5 | 47.5  |
|                                                              | -20 (-30)                  | Ft.                    | N/A                      | N/A  | 15    | 28   | 14    | N/A                         | N/A  | 15    | 100  | 88    | N/A                          | N/A  | 15    | 100  | 108   |
|                                                              |                            | M                      | N/A                      | N/A  | 4.6   | 8.5  | 4.3   | N/A                         | N/A  | 4.6   | 30.5 | 26.8  | N/A                          | N/A  | 4.6   | 30.5 | 32.9  |
|                                                              | -40 (-40)                  | Ft.                    | N/A                      | N/A  | 15    | 14   | 0     | N/A                         | N/A  | 15    | 85   | 62    | N/A                          | N/A  | 15    | 100  | 79    |
|                                                              |                            | M                      | N/A                      | N/A  | 4.6   | 4.3  | 0.0   | N/A                         | N/A  | 4.6   | 25.9 | 18.9  | N/A                          | N/A  | 4.6   | 30.5 | 24.1  |
| 140,000                                                      | 20 (-10)                   | Ft.                    | N/A                      | N/A  | 10    | 90   | 99    | N/A                         | N/A  | 10    | 90   | 210   | N/A                          | N/A  | 10    | 90   | 210   |
|                                                              |                            | M                      | N/A                      | N/A  | 3.0   | 27.4 | 30.2  | N/A                         | N/A  | 3.0   | 27.4 | 64.0  | N/A                          | N/A  | 3.0   | 27.4 | 64.0  |
|                                                              | 0 (-20)                    | Ft.                    | N/A                      | N/A  | 10    | 61   | 47    | N/A                         | N/A  | 10    | 90   | 153   | N/A                          | N/A  | 10    | 90   | 183   |
|                                                              |                            | M                      | N/A                      | N/A  | 3.0   | 18.6 | 14.3  | N/A                         | N/A  | 3.0   | 27.4 | 46.6  | N/A                          | N/A  | 3.0   | 27.4 | 55.8  |
|                                                              | -20 (-30)                  | Ft.                    | N/A                      | N/A  | 10    | 35   | 21    | N/A                         | N/A  | 10    | 90   | 104   | N/A                          | N/A  | 10    | 90   | 128   |
|                                                              |                            | M                      | N/A                      | N/A  | 3.0   | 10.7 | 6.4   | N/A                         | N/A  | 3.0   | 27.4 | 31.7  | N/A                          | N/A  | 3.0   | 27.4 | 39.0  |
|                                                              | -40 (-40)                  | Ft.                    | N/A                      | N/A  | 10    | 20   | NA    | N/A                         | N/A  | 10    | 90   | 75    | N/A                          | N/A  | 10    | 90   | 94    |
|                                                              |                            | M                      | N/A                      | N/A  | 3.0   | 6.1  | NA    | N/A                         | N/A  | 3.0   | 27.4 | 22.9  | N/A                          | N/A  | 3.0   | 27.4 | 28.7  |

59SE5A

## RETURN AIR TEMPERATURE

This furnace is designed for continuous return-air minimum temperature of 60°F (15°C) db or intermittent operation down to 55°F (13°C) db such as when used with a night setback thermometer. Return-air temperature must not exceed 80°F (27°C) db. Failure to follow these return air limits may affect reliability of heat exchangers, motors and controls.

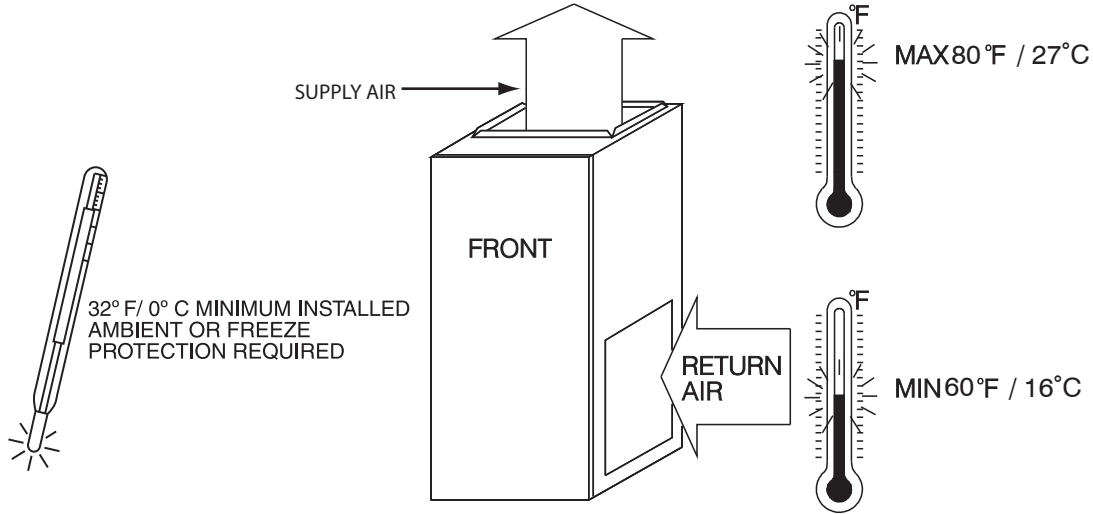

A10490


## MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

| POSITION                                                    | CLEARANCE        |
|-------------------------------------------------------------|------------------|
| Rear                                                        | 0 (0 mm)         |
| Front (Combustion air openings in furnace and in structure) | 1 in. (25 mm)    |
| Required for service**                                      | 24 in. (610 mm)* |
| All Sides of Supply Plenum**                                | 1 in. (25 mm)    |
| Sides                                                       | 0 (0 mm)         |
| Vent                                                        | 0 (0 mm)         |
| Top of Furnace                                              | 1 in. (25 mm)    |

\* Recommended

\*\*Consult your local building codes


## COMBUSTION-AIR PIPE FOR NON-DIRECT (1-PIPE) VENT APPLICATION

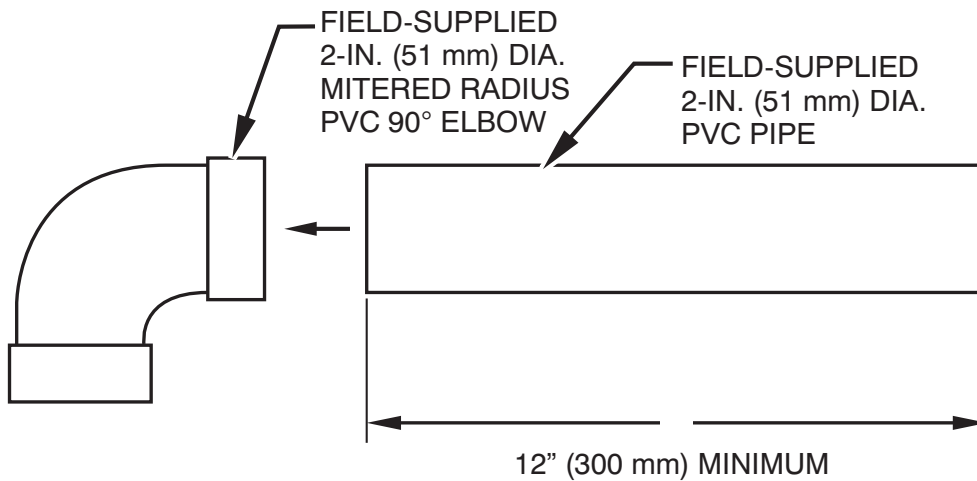


**NOTE:** See Installation Instructions for specific venting configurations.

A12376

## DOWNFLOW SUBBASE

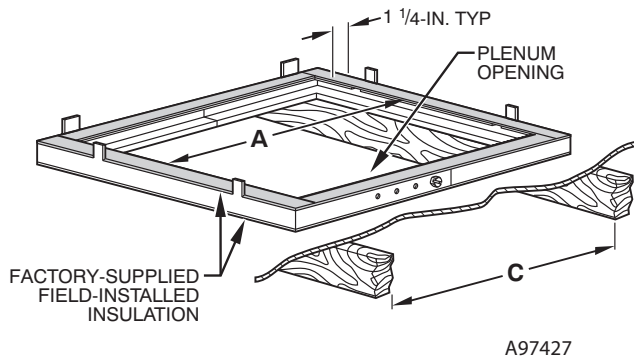


Assembled

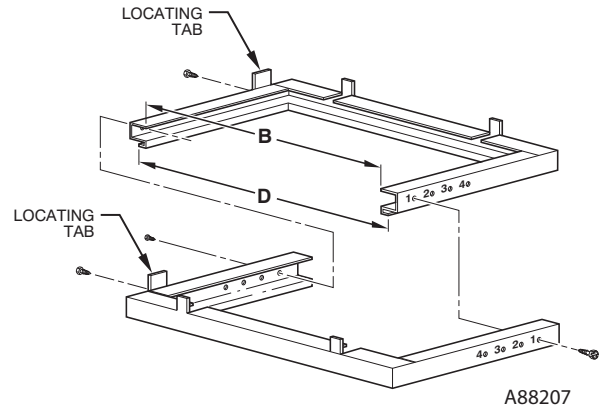

Disassembled


| DIMENSIONS (IN. / MM) |                                                         |                 |          |               |              |                               |
|-----------------------|---------------------------------------------------------|-----------------|----------|---------------|--------------|-------------------------------|
| FURNACE CASING WIDTH  | FURNACE IN DOWNFLOW APPLICATION                         | PLENUM OPENING* |          | FLOOR OPENING |              | HOLE NO. FOR WIDTH ADJUSTMENT |
|                       |                                                         | A               | B        | C             | D            |                               |
| 21 (533)              | Furnace with or without Cased Coil Assembly or Coil Box | 18-5/8 (396)    | 19 (483) | 20-1/4 (514)  | 20-5/8 (600) | 2                             |
| 24-1/2 (622)          | Furnace with or without Cased Coil Assembly or Coil Box | 22-1/8 (562)    | 19 (483) | 23-3/4 (603)  | 20-5/8 (600) | 1                             |

\*The plenum should be constructed 1/4-in. (6 mm) smaller in width and depth than the plenum dimensions shown above.

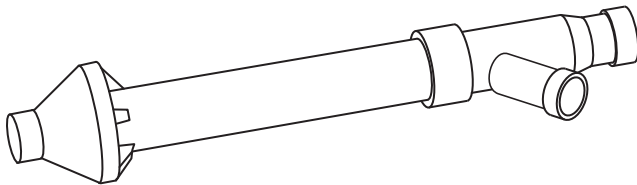

Concentric Vent Kit


A concentric vent kit allows vent and combustion-air pipes to terminate through a single exit in a roof or side wall. One pipe runs inside the other allowing venting through the inner pipe and combustion air to be drawn in through the outer pipe.



Downflow Subbase

One base fits all furnace sizes. The base is designed to be installed between the furnace and a combustible floor when no coil box is used or when a coil box other than a Carrier cased coil is used. It is CSA design certified for use with Carrier branded furnaces when installed in downflow applications.

## ACCESSORY MEDIA FILTER CABINET

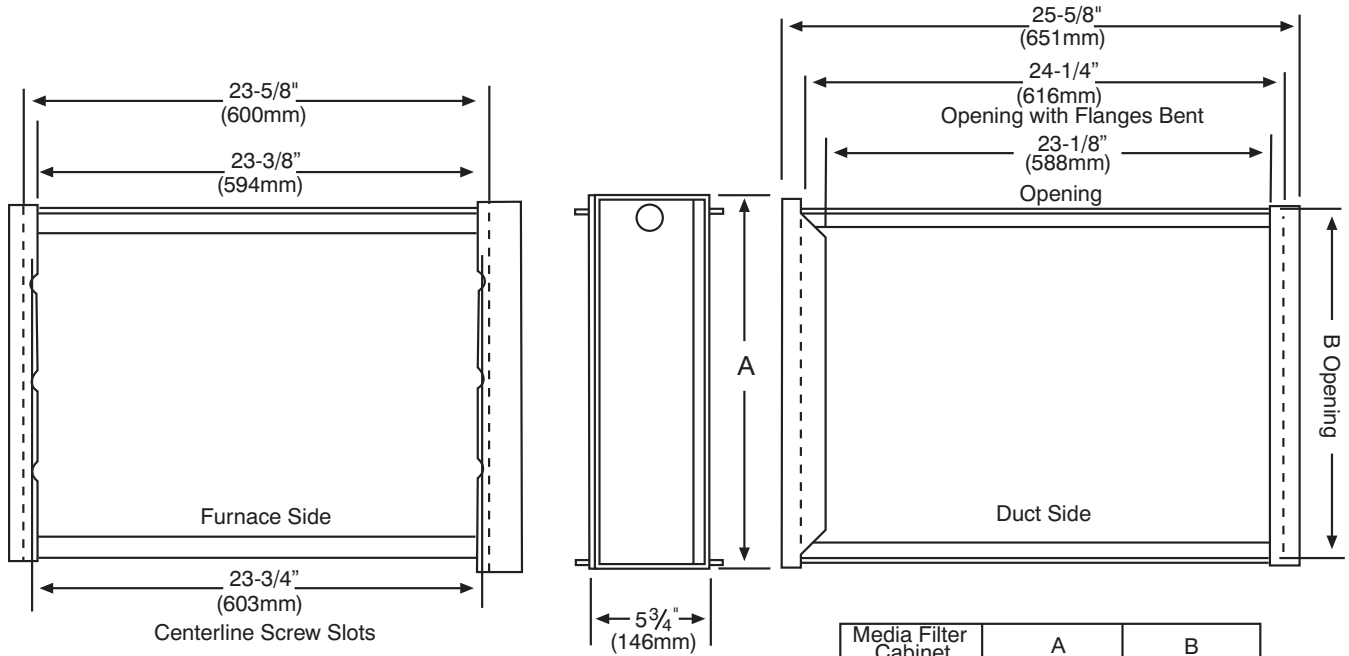


59SE5A

NOTE: Media cabinet is matched to the bottom opening on furnace. May also be used for side return.

A12428

## TYPICAL WIRING SCHEMATIC


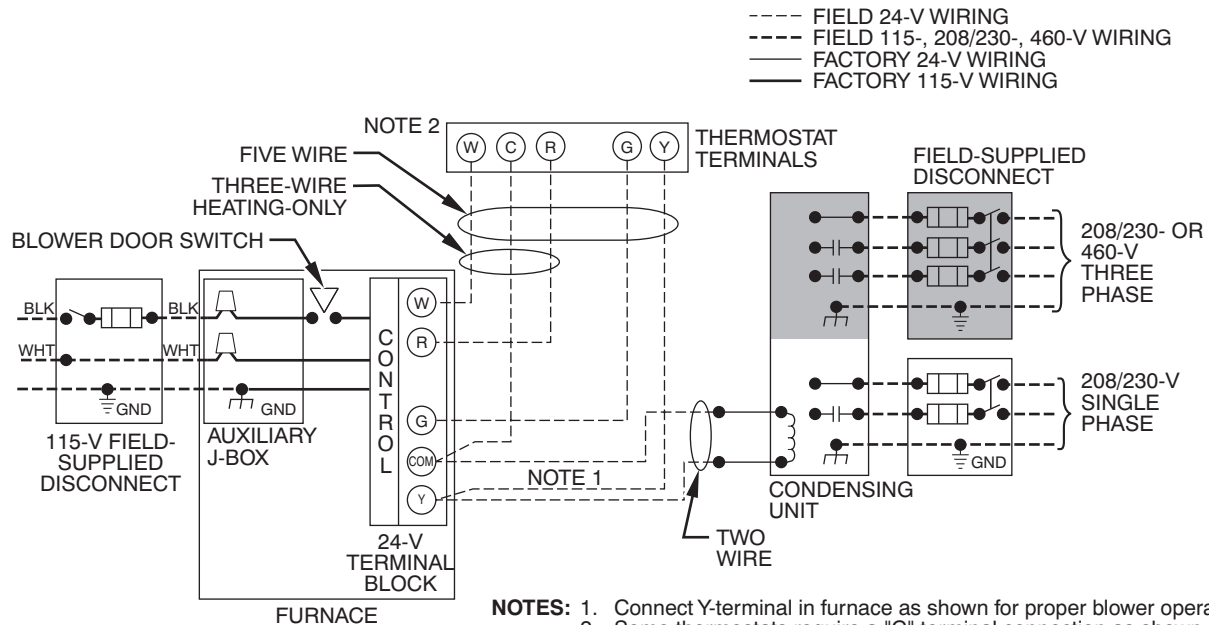


A11387

## DIMENSIONAL DRAWING

## NOTES:

1. Doors may vary by model.
2. Minimum return-air openings at furnace, based on metal duct. If flex duct is used, see flex duct manufacturer's recommendations for equivalent diameters.
  - a. For 800 CFM-16-in. (406 mm) round or 14 1/2 x 12-in. (368 x 305 mm) rectangle.
  - b. For 1200 CFM-20-in. (508 mm) round or 14 1/2 x 19 1/2-in. (368 x 495 mm) rectangle.
  - c. For 1600 CFM-22-in. (559 mm) round or 14 1/2 x 22 1/16-in. (368 x 560 mm) rectangle.
  - d. Return air above 1800 CFM at 0.5 in. w.c. ESP on 24.5" casing, requires one of the following configurations: 2 sides, 1 side and a bottom or bottom only. See Air Delivery table in this document for specific use to allow for sufficient airflow to the furnace.

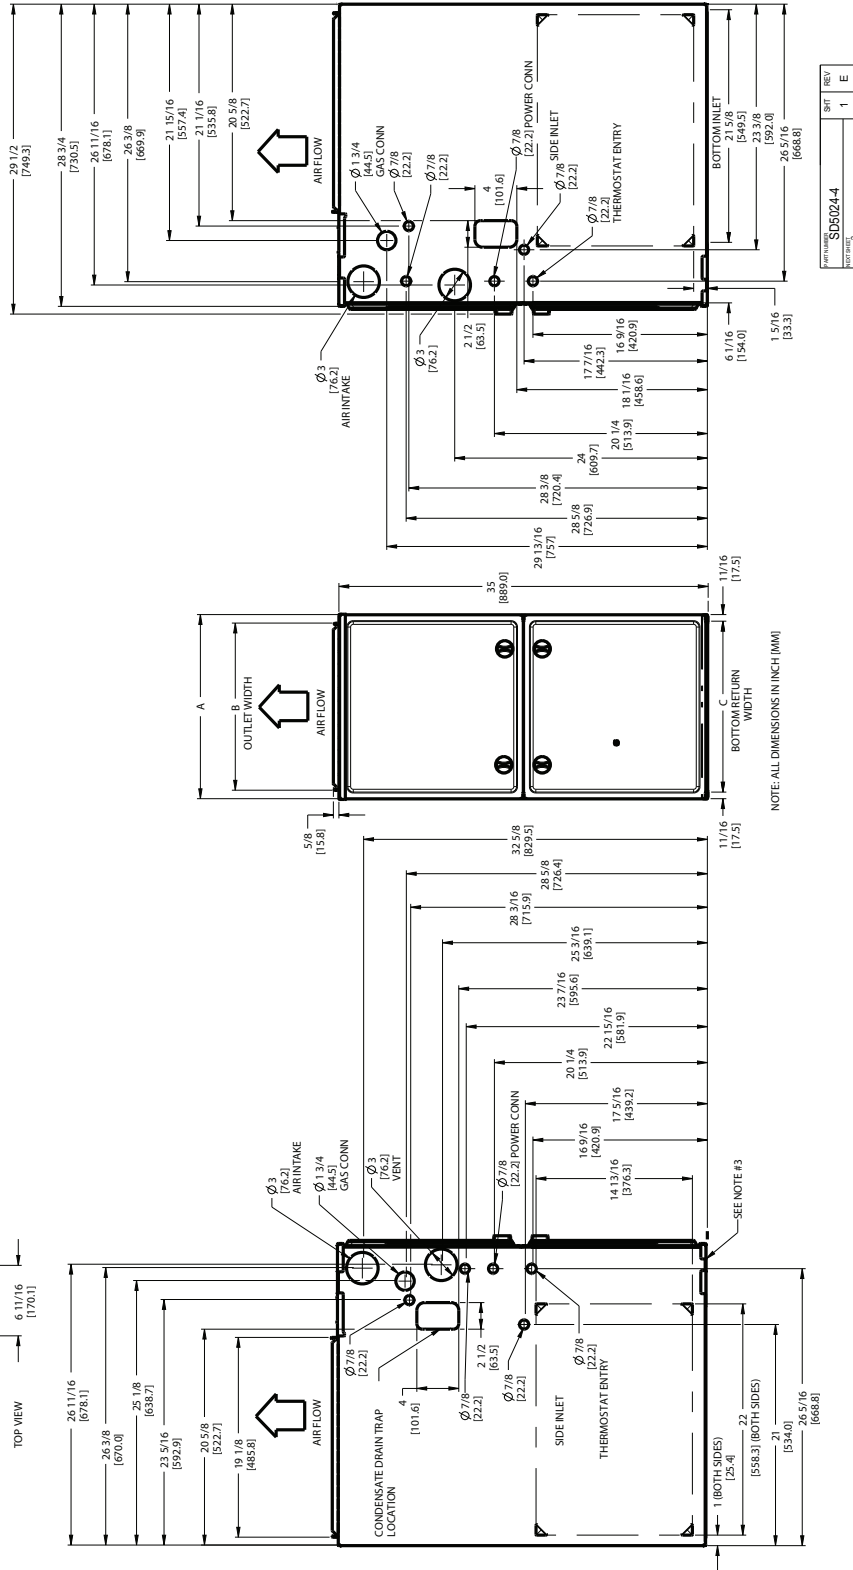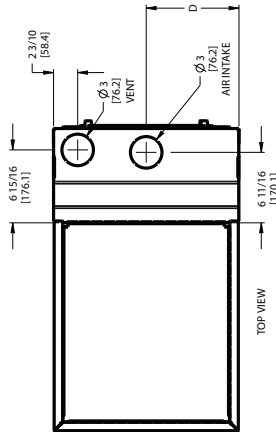

| REV | DATE | BY | CHKD |
|-----|------|----|------|
| 1   |      |    |      |
| E   |      |    |      |

A12570

| 59SE5<br>FURNACE SIZE | A            | B            | C            | D            | SHIP WT.<br>LB (KG) |
|-----------------------|--------------|--------------|--------------|--------------|---------------------|
| 100-20                | 21 (533)     | 19-3/8 (492) | 19-1/2 (495) | 10-1/2 (267) | 173.5 (78.1)        |
| 120-20                | 24-1/2 (622) | 22-7/8 (581) | 23 (584)     | 12-1/4 (311) | 191.0 (85.9)        |
| 140-20                |              |              |              |              | 195.0 (87.8)        |

# GUIDE SPECIFICATIONS

## General

### System Description

Furnish a \_\_\_\_\_ multipoise gas-fired condensing furnace for use with natural gas or propane (factory-authorized conversion kit required for propane).

### Quality Assurance

Unit will be designed, tested and constructed to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces.

Unit will be third party certified by CSA to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces. Unit will carry the CSA Blue Star® and Blue Flame® labels. Unit efficiency testing will be performed per the current DOE test procedure as listed in the Federal Register.

### Delivery, Storage, and Handling

Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

### Equipment

#### Blower Wheel and PSC Blower Motor

Galvanized blower wheel shall be centrifugal type, statically and dynamically balanced. Blower motor of PSC type shall be permanently lubricated with sleeve bearings, of \_\_\_\_\_ hp, and have multiple speeds from 500-1150 RPM operating only when 220-VAC motor inputs are provided. Blower motor shall be direct drive and soft mounted to the blower housing to reduce vibration transmission.

#### Filters

Furnace shall have reusable-type filters. Filter shall be \_\_\_\_\_ in. (mm) X \_\_\_\_\_ in. (mm). An accessory highly efficient Media Filter is available as an option. \_\_\_\_\_ Media Filter.

#### Casing

Casing shall be of .030 in. thickness minimum, pre-painted galvanized steel.

#### Draft Inducer Motor

Draft inducer motor shall be single-speed PSC design.

### Primary Heat Exchangers

Primary heat exchangers shall be 3-Pass corrosion-resistant aluminized steel of fold-and-crimp sectional design and applied operating under negative pressure.

### Secondary Heat Exchangers

Secondary heat exchangers shall be of a stainless steel flow-through of fin-and-tube design and applied operating under negative pressure.

### Controls

Controls shall include a micro-processor-based integrated electronic control board with at least 16 service troubleshooting codes displayed via diagnostic flashing LED light on the control, a self-test feature that checks all major functions of the furnace, and a replaceable automotive-type circuit protection fuse. Multiple operational settings available including blower speeds for heating and cooling. Continuous fan speed is the same as the selected heating speed.

### Operating Characteristics

Heating capacity shall be \_\_\_\_\_ Btuh input; \_\_\_\_\_ Btuh output capacity.

Fuel Gas Efficiency shall be \_\_\_\_\_ AFUE.

Air delivery shall be \_\_\_\_\_ cfm minimum at 0.50 in. W.C. external static pressure.

Dimensions shall be: depth \_\_\_\_\_ in. (mm); width \_\_\_\_\_ in. (mm); height \_\_\_\_\_ in. (mm) (casing only).

Height shall be \_\_\_\_\_ in. (mm) with A/C coil and \_\_\_\_\_ in. (mm) overall with plenum.

### Electrical Requirements

Electrical supply shall be 220 Volts 50 Hz, single-phase (nominal). Minimum wire size shall be \_\_\_\_\_ AWG; maximum fuse size of HACR-type designated circuit breaker shall be \_\_\_\_\_ amps.

### Special Features

Refer to section of the product data identifying accessories and descriptions for specific features and available enhancements.

