

High Wall Residential Cooling Only System

Indoor Model: 40GVC024---3

Outdoor Model: 38GVC024---3



turn to the experts

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____



Performance
SERIES

(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size	24
	Outdoor Model	38GVC024---3
	Indoor Model	40GVC024---3
Performance	Cooling Rated Capacity Btu/h	22,000
	Cooling Cap. Range Min. - Max Btu/h	6,400 - 24,000
	SEER / EER	16 / 10
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible
	Wired (°C, °F, Convertible)	Not Available
Operating Range	Cooling Outdoor Min - Max DB °F	5 - 118
	Cooling Indoor DB Min -Max °F	61 - 95
Piping	Total Piping Length ft.	82
	Piping Lift ft.	33
	Pipe Connection Size - Mixed Phase (in)	1/4
	Pipe Connection Size - Vapor (in)	1/2


Electrical	Voltage	208/230-1-60
	Power Supply	Indoor unit powered from outdoor unit
	Outdoor - MCA	16
Outdoor	Outdoor - Fuse Rating (MOPC)	25
	Dimensions (W X H X D) In	37.9 x 27.6 x 15.6
	Net Weight (lbs.)	112.2
Indoor	Sound Pressure dBA	53
	Dimensions (W X H X D) In	39.7 x 12.6 x 8.7
	Net Weight (lbs.)	33.1
	Number of Fan Speeds	4
	Airflow (L / M / H / T) CFM	353 / 412 / 471 / 588
	Sound Pressure dBA (L / M / H / T)	24 / 39 / 43 / 48

Accessories

Condensate Pump 208/230V

Insulated 25' Line Set - 1/4" x 1/2"

Construction View Indoor Unit 40GVC024---3

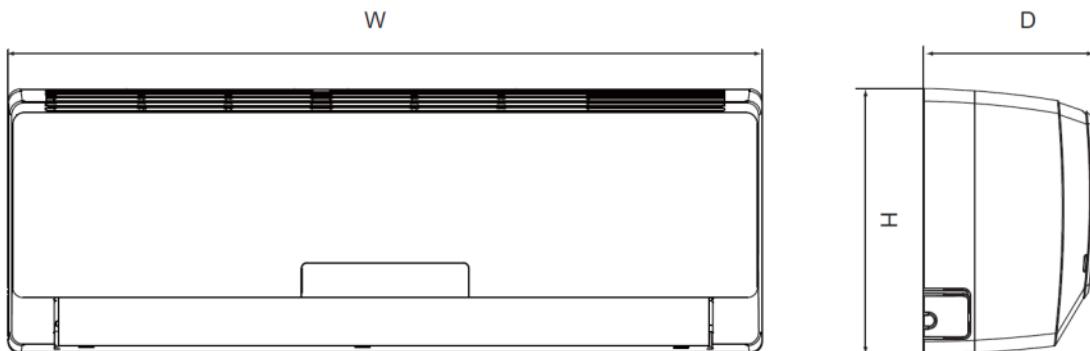

Unit Size	W In. (mm)	H In. (mm)	D In. (mm)	Net Operating Weight Lbs. (Kg)
24 K	39.7 (1008)	12.6 (319)	8.7 (221)	33.1 (15.0)

Construction View Outdoor Unit 38GVC024---3

