

High Wall Cooling Only Ductless System

Indoor Model: 40MFC018---3
Outdoor Model: 38MFC018---3



Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____



Comfort
SERIES

(Unless otherwise indicated, data applies to both indoor and outdoor models)

HIGHWALL STANDARD FEATURES

- 15 SEER
- Line lengths up to 98ft (30m)
- Inverter Driven Compressor
- Rotary compressor
- 3 indoor unit fan speeds
- Turbo mode
- Motorized louver allows fixed or oscillating motion
- Indoor sound: as low as 37 decibels
- Cleanable filters

CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (optional)

SYSTEM SIZE	18
REFRIGERANT	R-410A
PERFORMANCE	
Rated Capacity (Btuh)	18,000
Range (Btuh)	5,500-19,000
SEER/EER	15.0 / 8.5
CFM/Sound Pressure - dBA	
Outdoor (dBA)	60
Indoor Airflow H/M/L (cfm)	348/294/236
Indoor Sound Pressure at Different Speeds (dBA)	45/41/37
ELECTRICAL	
System Voltage	208/230-1-60
Indoor Unit	Wired from Outdoor
Wires between Indoor and Outdoor	4
MCA	14
MOCP	20

CONTROLS

Wireless Remote	Standard
Wired Control	Optional

REFRIGERANT LINES

Total Piping Length ft (m)	98 (30)
Vertical Lift ft (m)	65 (20)
Suction Line Size (in)	1/2
Liquid Line Size (in)	1/4

AMBIENT OPERATING RANGE

Cooling DB Min ~ Max °F(°C)	14~115 (-10~46)
-----------------------------------	-----------------


UNIT WEIGHT - Gross/Net

Indoor unit (lbs)	25.4/19.8
Outdoor unit (lbs)	81.6/76.0


Accessories:

- ☐ Wired Control Convertible – Fahrenheit / Celsius KSACN0101AAA ☐ Condensate Pump 115V

Construction View:
Indoor Unit 40MFC018---3
Outdoor Unit 38MFC018---3

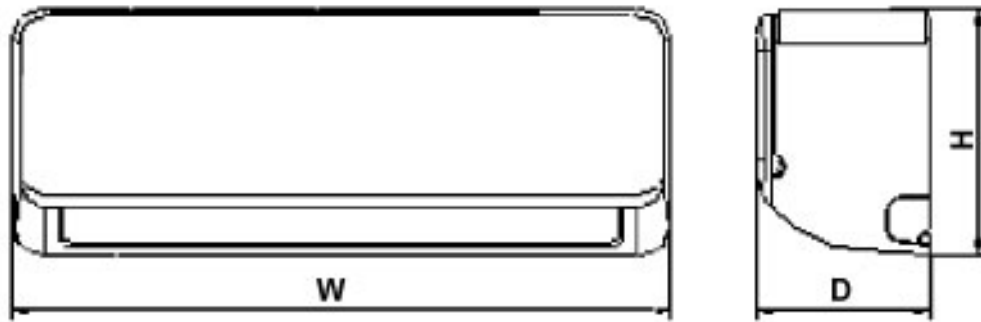

Unit Size	W in (mm)	D in (mm)	H in (mm)	Operating Weight lb (kg)
18K AC	35.6 (905)	7.8 (198)	10.8 (275)	19.8 (9)

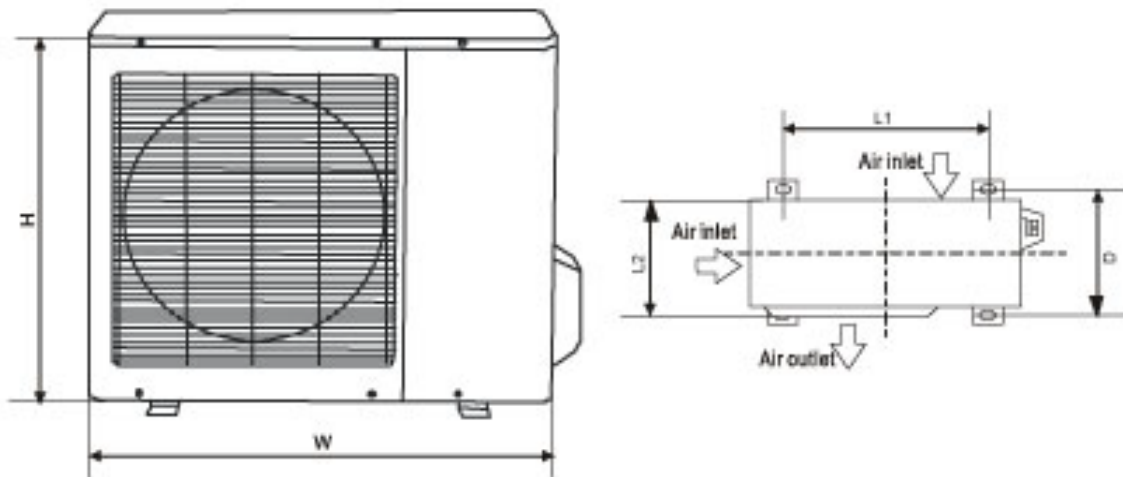

Model	W in (mm)	D in (mm)	H in (mm)	L1 in (mm)	L2 in (mm)	Operating Weight lb (kg)
18K AC	29.9 (760)	11.2 (285)	23.2 (590)	20.9 (530)	11.4 (290)	82.7 (37.5)

