

High Wall Heat Pump Ductless System

Indoor Model:

40MPHAQ09XA3



turn to the experts™

Submittal Data

Job Data:

Location:

Buyer: Buyer P.O. #:

Carrier #:

Unit Number:

Model Number:

Performance Data Certified By:

Date:



STANDARD FEATURES

- Modes: Cool, Heat, Smart Dry, Fan, Auto
- Turbo Mode
- Fully Modulating fan speeds
- Sleep Mode
- Up-Down / Right-Left Louver control (fixed or swing)
- Relative Humidity Sensor
- Built in occupancy sensor
- ECO Mode
- Carbon Filter
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Anti-corrosive fin coating

Controls:

- Wi-Fi Built-in
- Wireless Remote Controller included with indoor unit
- Wired Remote Controller KSACN0401AAA (7 Day programmable) (Optional)

LIMITED WARRANTY*

- 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years
- *For residential applications. See warranty for full details.

System	Size		9
	Indoor Model		40MPHAQ09XA3
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	208/230-1-60	
	MCA	A.	0.3
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
	Wired Remote Controller (°F/°C Convertible)		Optional
Operating Range	Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)
	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	3/8 (9.52)

Indoor Coil	Face Area (sq. ft.)	Sq. Ft.	2.2
	No. Rows		4
	Fins per inch		21
	Circuits		5
Indoor	Unit Width	in (mm)	35.2 (895)
	Unit Height	in (mm)	11.7 (298)
	Unit Depth	in (mm)	9.8(248)
	Net Weight	lbs (kg)	37.48 (17)
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	144/245/295/345
	Sound Pressure (lowest to highest)	dB(A)	29/35.5/41.5/45.6
	Air throw Data	ft (m)	21.98 (6.7)
	Moisture removal	Pint/h (L/h)	2.11 (1.0)
	Field Drain Pipe Size O.D.	in (mm)	1 (25.4)




Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

For Compatibility See Product Data

Accessories

53DS-900---118	Condensate Pump
KSACN0401AAA	Wired Remote Control 7 Day Programmable
KSAIC0101230	24V Interface Kit 230V
53DS-900---089	Insulated 25' Line Set - 1/4" x 3/8"

Construction View

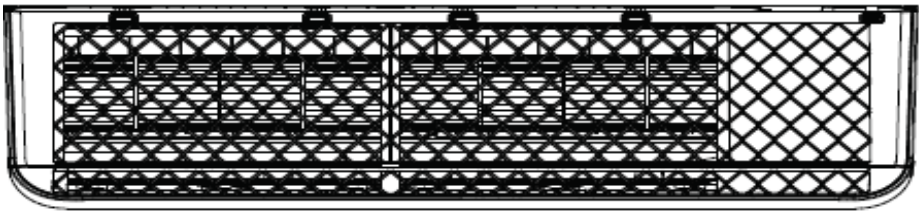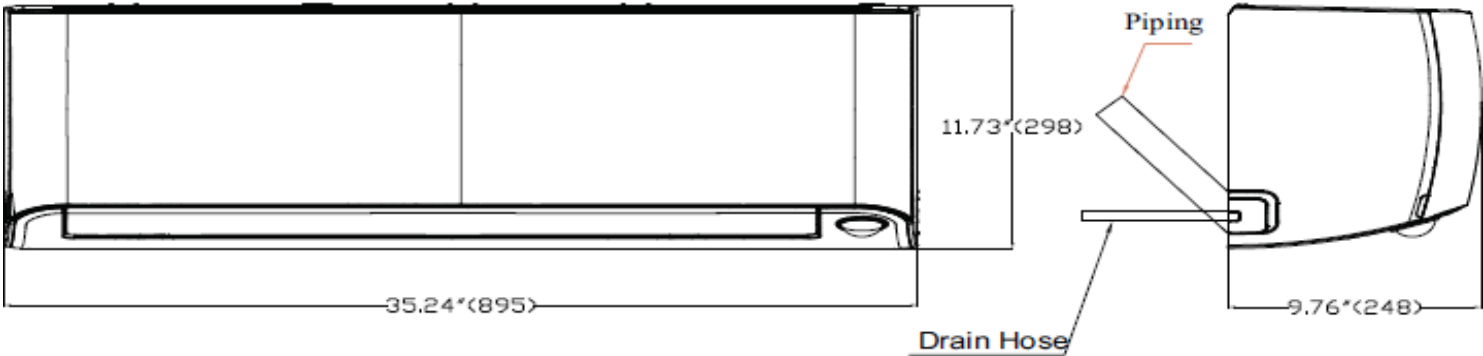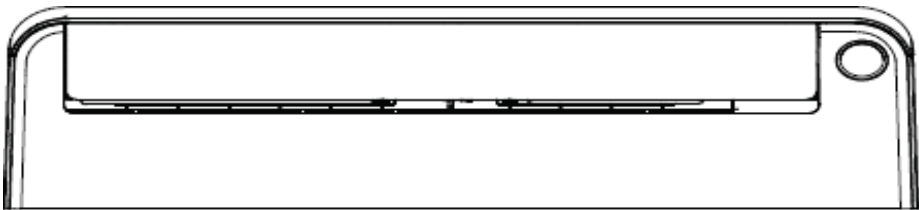

Drain Hose	Ø0.625"(16) L=25.20"(640)
------------	---------------------------

Unit: Inch (mm)

