

High Wall Heat Pump Ductless System

Indoor Model: D5FVHAH18XAK


Job Data:

Location:

Tag #:

Carrier#:


Date:

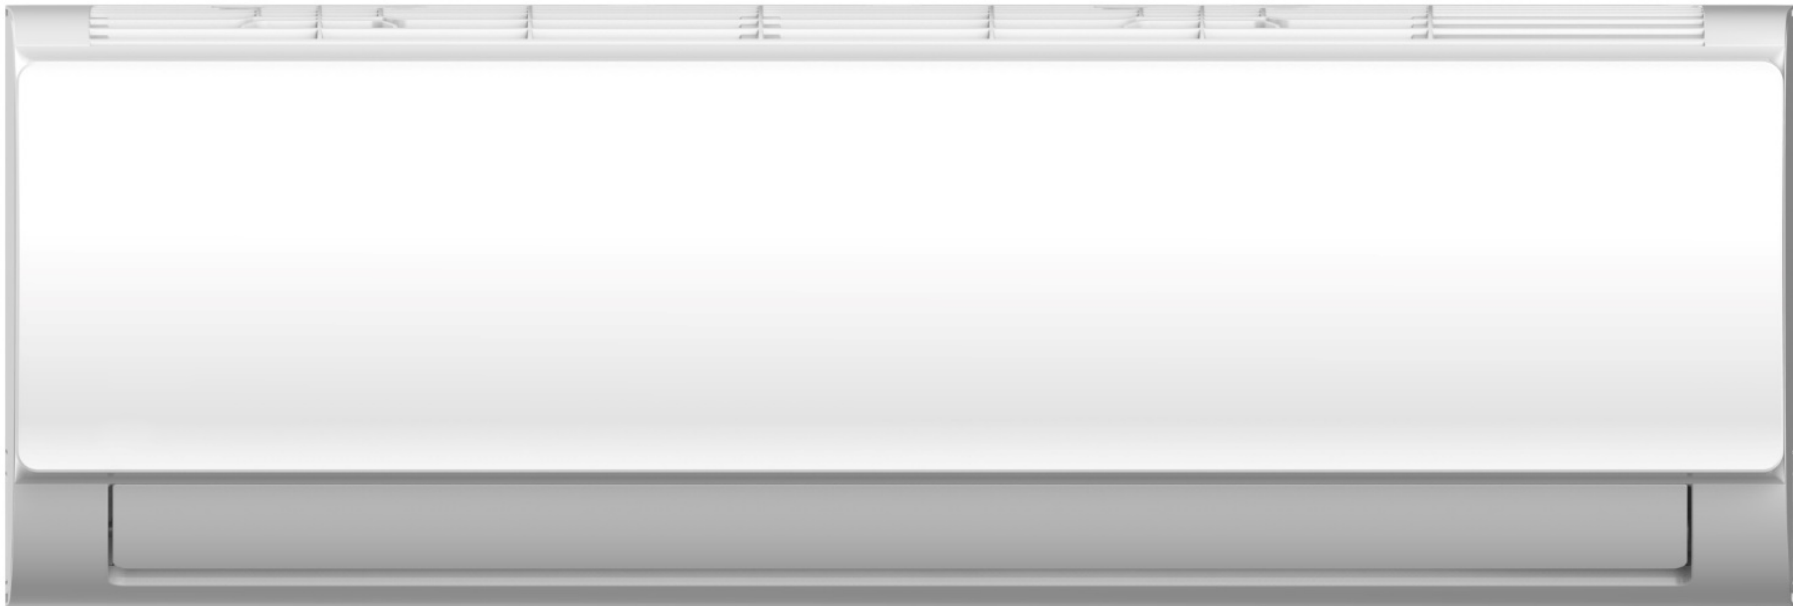

- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
  - Four fan speeds
  - Sleep Mode
  - Turbo Mode
  - Follow Me (senses temperature at handheld remote)
  - Auto-Restart function
  - Quiet indoor operation
  - Anti-corrosive fin coating


- RESIDENTIAL APPLICATION LIMITED WARRANTY\***
- Five (5) years parts and compressor warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

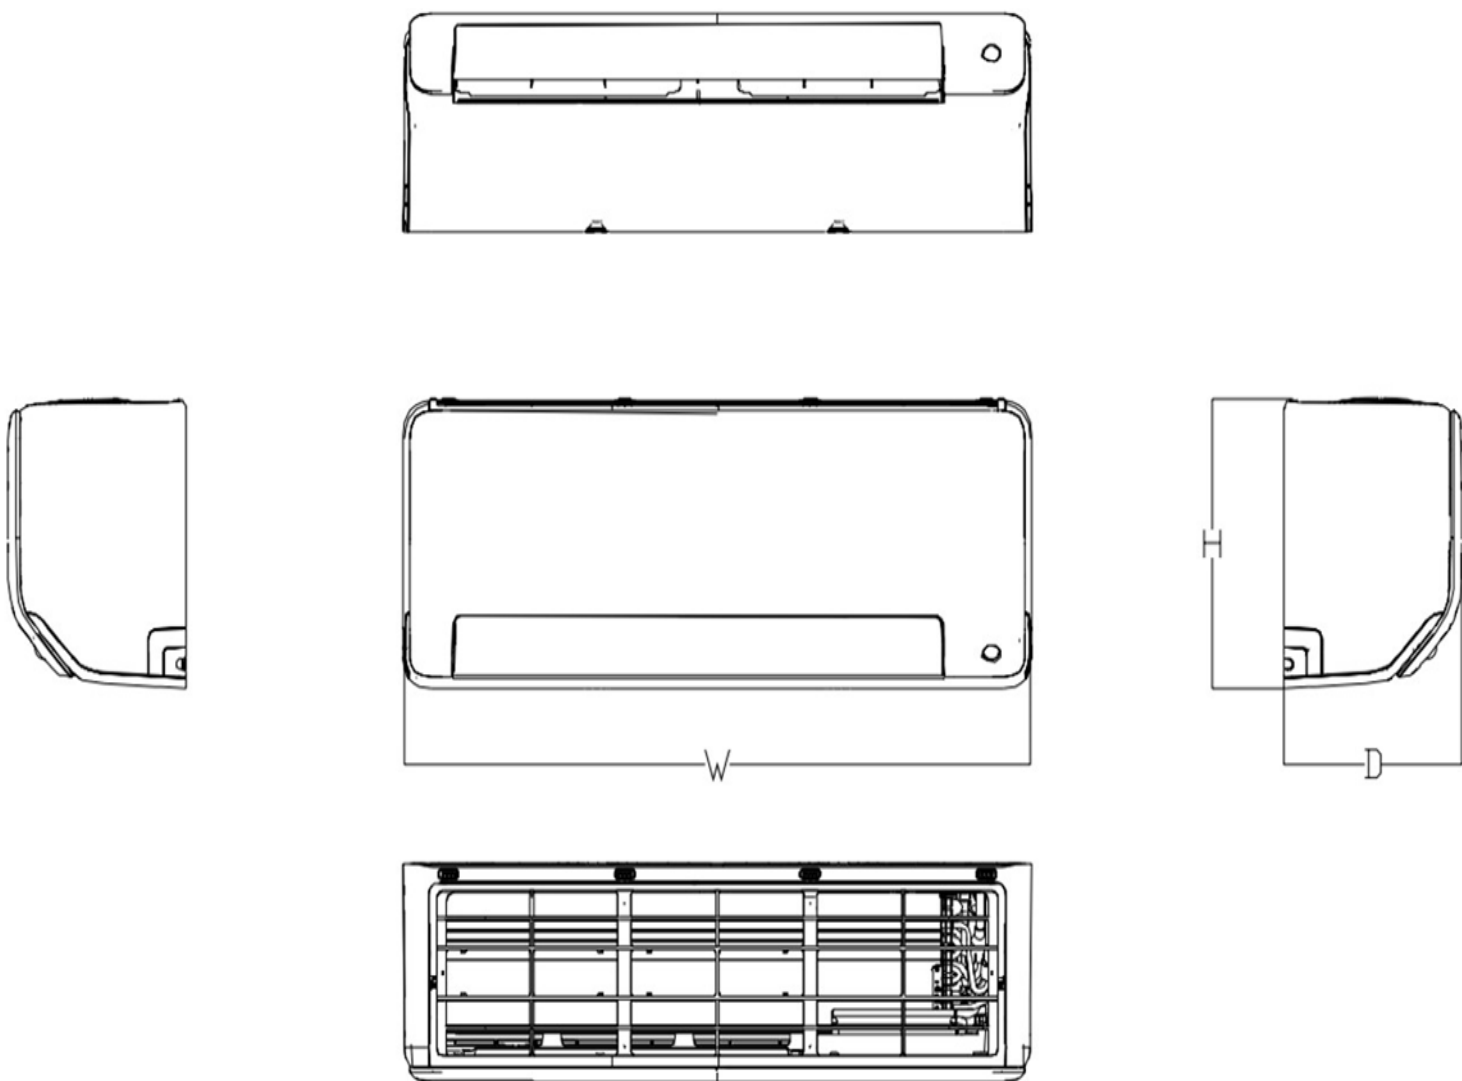

| INDOOR UNIT DIMENSIONS |      |       |      |       |
|------------------------|------|-------|------|-------|
| Capacity               | Unit | W     | D    | H     |
| 9K                     | mm   | 715   | 194  | 285   |
|                        | inch | 28.15 | 7.64 | 11.22 |
| 12K                    | mm   | 805   | 194  | 285   |
|                        | inch | 31.69 | 7.64 | 11.22 |
| 18K                    | mm   | 957   | 213  | 302   |
|                        | inch | 37.68 | 8.39 | 11.89 |
| 24K                    | mm   | 1040  | 220  | 327   |
|                        | inch | 40.94 | 8.66 | 12.87 |

| D5FVHAH18XAK    |                                                |                                     |                 |
|-----------------|------------------------------------------------|-------------------------------------|-----------------|
| System          | Indoor Model #                                 |                                     | D5FVHAH18XAK    |
|                 | Indoor Size                                    |                                     | 18000           |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                             | 208-230/1/60    |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit |                 |
|                 | MCA                                            | A.                                  | 3               |
| Operating Range | Cooling Indoor DB Min - Max                    | °F(°C)                              | 60~90(16~32)    |
|                 | Heating Indoor DB Min - Max                    | °F(°C)                              | 32~86(0~30)     |
| Indoor Coil     | Face Area                                      | Sq. Ft.                             | 2.37            |
|                 | No. Rows                                       |                                     | 2               |
|                 | Fins per inch                                  |                                     | 22              |
|                 | Circuits                                       |                                     | 4               |
| Indoor Unit     | Number of Fan Speeds                           |                                     | 1200/1000/900   |
|                 | Airflow (highest to lowest)                    | CFM                                 | 477.3/359/264.9 |
|                 | Sound Pressure (highest to lowest)             | dB(A)                               | 44/37.5/30/19   |
|                 | Moisture Removal                               | L/h                                 | 2.2             |
|                 | Air Throw Data                                 | ft(m)                               | 20.67(6.3)      |
| Dimensions      | Height                                         | in (mm)                             | 11.89(302)      |
|                 | Width                                          | in (mm)                             | 37.68(957)      |
|                 | Depth                                          | in (mm)                             | 8.39(213)       |
|                 | Net Weight                                     | lbs (kg)                            | 23.37(10.6)     |
|                 | Shipping Height                                | in (mm)                             | 15.16(385)      |
|                 | Shipping Width                                 | in (mm)                             | 40.75(1035)     |
|                 | Shipping Depth                                 | in (mm)                             | 11.61(295)      |
|                 | Shipping Net Weight                            | lbs (kg)                            | 29.76(13.5)     |
| CONTROLS        |                                                |                                     |                 |
| Standard        | Wireless Remote Controller (°F/°C Convertible) |                                     |                 |
| Optional        | Wired Remote Control with Timer Function       |                                     | KSACN1201AAA    |
|                 | Wi-Fi™ Kit High Wall                           |                                     | KSAIF0701AAA    |
|                 | 24V Mini Interface                             |                                     | KSAIC0601230    |

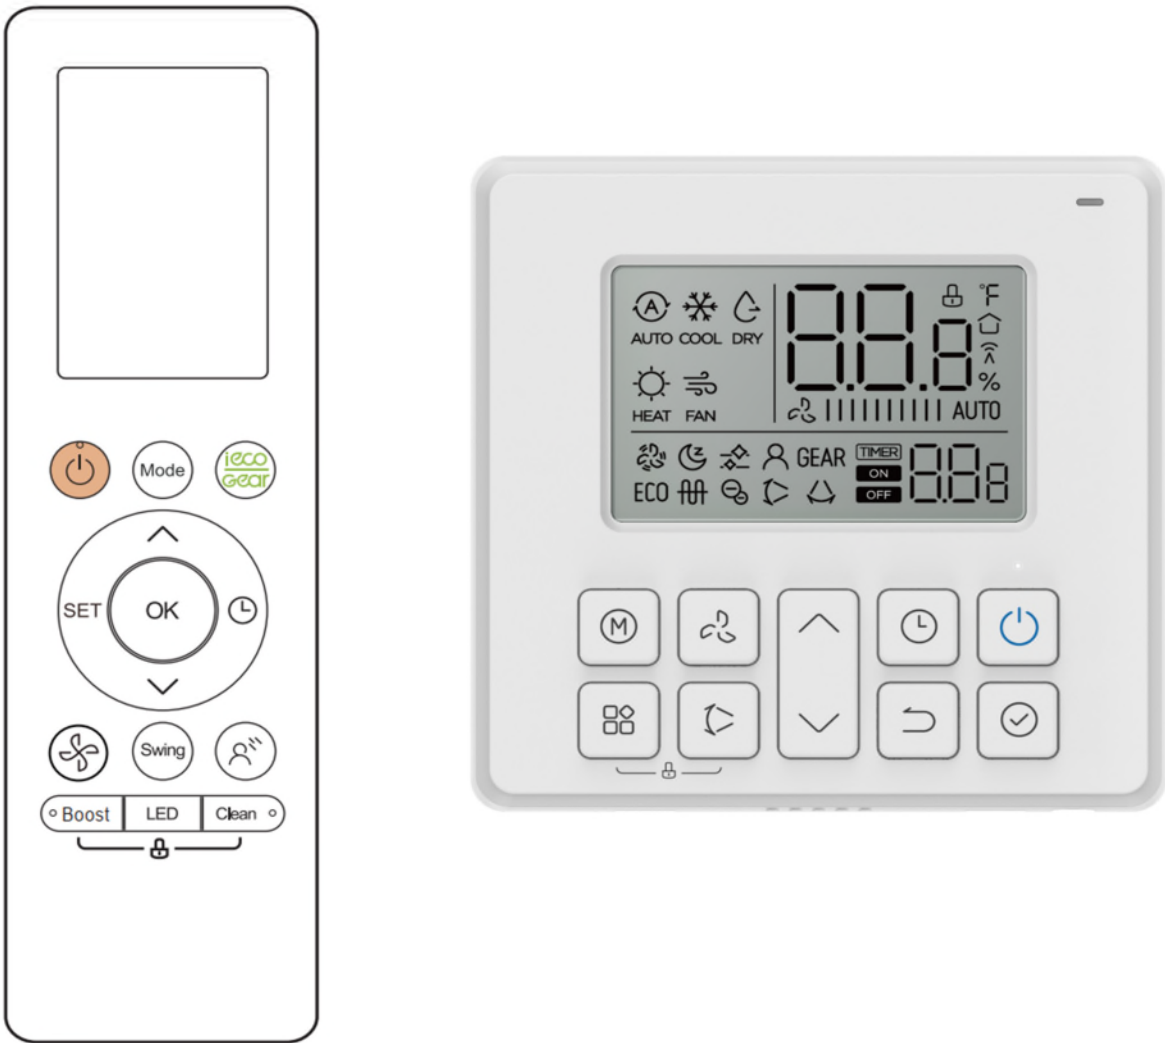

R-454B