

**PA13NA
PA13PA**

**13 SEER Split—System Air Conditioner
With R—410A Refrigerant
Single & Three Phase
2 To 5 Tons**

Product Data



FEATURES AND BENEFITS

AVAILABLE SIZES:

Nominal sizes are available from 024 through 060 to meet the needs of residential and light commercial applications.

CERTIFICATION:

All models are listed with UL, (U.S. and Canada), AHRI, and CEC.

ELECTRICAL RANGE:

Units offered in single phase 208/230v are 024–060, and three phase 208/230v in 036, 048 and 060.

FAN MOTOR:

The totally enclosed fan motor provides greater reliability under adverse conditions and dependable performance for many years. The permanent split capacitor type motor was designed for optimum efficiency. The motor was then qualified under extreme conditions to help ensure a long, reliable life.

CABINET:

A weather protective cabinet of prepainted steel is protected underneath by a galvanized coating and treated with a layer of zinc phosphate for a finish that will last for many years. All screws on cabinet exterior are coated for a long-lasting, rust-resistant, quality appearance.

UNIT DESIGN:

The copper tube, enhanced sine wave, aluminum fin coil is designed for optimum heat transfer. Vertical air discharge carries sound and hot condenser air up and away from adjacent patio areas and foliage. The base pan is designed for easy removal of water, dirt, and leaves.

COMPRESSOR:

Each compressor is protected with internal temperature- and current-sensitive overloads. An internal pressure relief valve provides high pressure protection to the refrigerant system. For improved serviceability, all models are equipped with a compressor terminal plug.


SERVICE VALVES:

Both service valves are brass, front seating type with sweat connections. Valves are externally located so refrigerant tube connections can be made quickly and easily. Each valve has a service port for ease of checking operating refrigerant pressures.

SERVICEABILITY:

One access panel provides access to electrical controls. Removal of top gives access to fan motor, compressor, and condenser coil.

PRODUCT NUMBER NOMENCLATURE

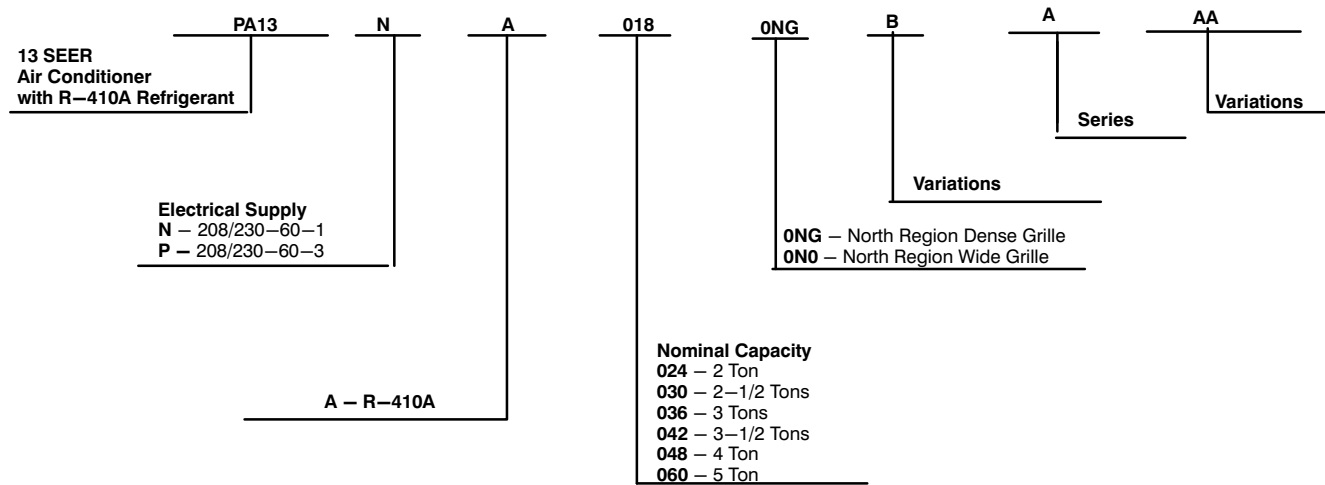

Use of the AHRI Certified
TM Mark indicates a
manufacturer's
participation in the
program. For verification
of certification for individual
products, go to
www.ahridirectory.org.



ISO 9001
QMS-SAI Global



This product has been designed and manufactured to meet Energy Star® criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow all manufacturing refrigerant charging and air flow instructions. **Failure to confirm proper charge and air flow may reduce energy efficiency and shorten equipment life.**

SPECIFICATIONS

UNIT SIZE SERIES	024 B	030 B	036 E	042 E	048 E	D	E	060 B
ELECTRICAL								
Unit Volts—Hertz—Phase	208/230—60—1		208/230—60—1		208/230—60—3		208/230—60—1	
Operating Voltage Range*	197—253		187—253		187—253		197—253	
Compressor—Rated Load Amps	11.2	12.8	14.1	16.6	18.8	13.1	22.1	187—253
Locked Rotor Amps	60.8	64.0	70.0	85.0	96.0	83.1	125.0	16.0
Condenser Fan Motor— Full Load Amps	0.8	0.8	1.4	1.1	1.4	1.4	1.4	110.0
Min Unit Ampacity for Wire Sizing	14.8	16.8	19.0	21.9	24.9	17.8	29.0	1.4
Min Wire Size (60°/75° Copper) AWG**	14	14	14	12	12	12	10	21.4
Max Wire Length (60°/75°) ft (m)†	44 / 42 (13.4 / 12.8)	46 / 44 (14.0 / 13.4)	41 / 39 (12.5 / 11.9)	52 / 50 (15.9 / 15.2)	50 / 48 (15.2 / 14.6)	81 / 76 (24.7 / 23.2)	69 / 66 (21.0 / 20.1)	66 / 63 (20.1 / 19.2)
Max Branch Circuit Fuse Size†	25	25	30	35	40	30	50	30
COMPRESSOR AND REFRIGERANT								
Type	Scroll							
Temperature and Current Protection	Internal Line Break							
R—410A Refrigerant— Amount Lb (kg) @ 15 ft (4.6 m)	3.15 (1.43)	3.63 (1.65)	4.67 (2.12)	6.12 (2.78)	7.00 (3.18)	8.80 (3.99)	8.00 (3.63)	
Refrigerant Tubes (In. OD)	3/4 and 3/8							
†† Rated Vapor and Maximum Liquid	7/8 and 3/8							
CONDENSER COIL AND FAN								
Coil Face Area (Sq Ft)	8.4	9.8	12.60	17.3	19.29	15.14		
Fan Motor—HP Type, and RPM	1/10 PSC and 1100	PSC and 1100	1/4 PSC and 1100	1/5 PSC and 1100	1/4 PSC and 1100			
Volts—Hertz—Phase	208/230—60—1							
Condenser Airflow (CFM)	2000	2000	2500	3000	3400	3400		
OPTIONAL EQUIPMENT								
Cycle Protector	KSACY0101AAA							
Start Assist—PTC Type	KAACS0201PTC		KAACS0201PTC		N/A		KAACS0201PTC	
Start Assist—Capacitor/Relay Type	KSASHS1501AAA		KSASHS1501AAA		N/A		KSASHS1501AAA	
MotorMaster® Control	KSASHS1501AAA		KSASHS1501AAA		N/A		KSASHS1501AAA	
Ball Bearing Fan Motor (RCD)	HC34GE239	HC40GR232	HC38GE219	HC38GE219	HC40GE226			
Low—Pressure Switch	KAALP0401PUR							
High—Pressure Switch	KAAHI0501PUR							
Compressor Sound Hood	KSASH0601COP							
Time—Delay Relay	KAATD0101TDR							
Low—Ambient Pressure Switch Kit	KSALA0301410							
Winter Start Control	KAAWS0101AAA							
Evaporator Freeze Thermostat	KAAFT0101AAA							
Compressor Crankcase Heater	KAAACH1201AAA							
Liquid Line Solenoid Valve††	KAALS0201LLS							
TXV (Hard Shutoff)††	KSATX0201PUR	KSATX0301PUR	KSATX0401PUR	KSATX0501PUR	KSATX0501PUR			
Liquid Line Filter Drier	KH43LG073							

N/A — Not applicable in this application.

* Permissible limits of the voltage range at which unit will operate satisfactorily. Operation outside these limits may result in unit failure.

† Time—delay fuse or circuit breaker.

‡ Length shown is as measured 1 way along wire path between unit and service panel for voltage drop not to exceed 2%.

** If wire is applied at ambient greater than 30°C, consult Table 310—16 of the NEC (NFPA 70). The ampacity of nonmetallic—sheathed cable (NM), trade name ROMEX, shall be that of 60°C conductors, per the NEC (NFPA 70) Article 336—26.

†† Do not use hard shutoff TXV with liquid solenoid valve.


‡‡ Units are rated with 25 ft (7.6 m) of lineset length. See *Vapor Line Sizing and Cooling Capacity Loss* table when using other sizes and lengths of lineset.

DIMENSIONS – ENGLISH


UNIT	SERIES	ELECTRICAL CHARACTERISTICS				A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (LBS)	SHIPPING WEIGHT (LBS)	SHIPPING DIMENSIONS (L x W x H)
PA13NA024	B	X	O	O	O	23 1/8"	24 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	12"	11 3/4"	11 7/8"	107	123	24 1/8" X 24 1/8" X 27 3/16"
PA13NA030	B	X	O	O	O	23 1/8"	28 7/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	12"	11 3/4"	12 1/2"	110	126	24 1/8" X 24 1/8" X 30 5/8"
PA13NA036	E	X	O	O	O	23 1/8"	35 3/16"	3 7/8"	7/8"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	12"	11 3/4"	13 3/4"	128	142	24 1/8" X 24 1/8" X 37 7/16"
PA13NA042	E	X	O	O	O	31 3/16"	31 13/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16"	15 1/2"	13 3/4"	164	178	32 3/16" X 32 3/16" X 34"
PA13NA048	E	X	O	O	O	31 3/16"	35 3/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16"	15 1/2"	15 1/2"	174	187	32 3/16" X 32 1/16" X 37 7/16"
PA13NA060	E	X	O	O	O	31 3/16"	28 7/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16"	15 1/2"	12 3/4"	195	210	32 3/16" X 32 3/16" X 30 5/8"
PA13PA036	B	O	O	X	O	23 1/8"	35 3/16"	3 7/8"	7/8"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	12"	11 3/4"	13 3/4"	128	142	24 1/8" X 24 1/8" X 37 7/16"
PA13PA048	D	O	O	X	O	31 3/16"	35 3/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16"	15 1/2"	15 1/2"	174	187	32 3/16" X 32 1/16" X 37 7/16"
PA13PA060	B	O	O	X	O	31 3/16"	28 7/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16"	15 1/2"	12 3/4"	195	210	32 3/16" X 32 3/16" X 30 5/8"

208-230-160
230-160
208/230-3-60
460-3-60

X = YES
O = NO

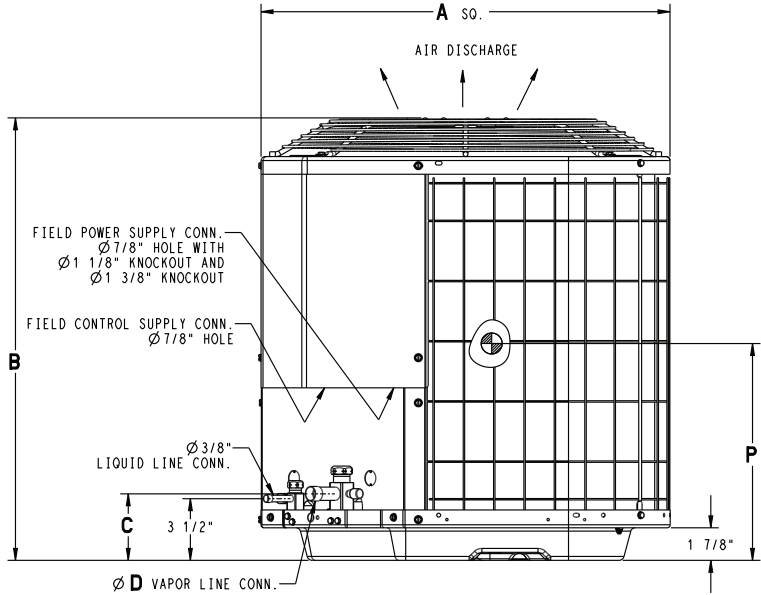

UNIT SIZE	MINIMUM MOUNTING PAD DIMENSIONS
24, 30, 36	23 1/2" X 23 1/2"
--	26" X 26"
42, 48, 60	31 1/2" X 31 1/2"
--	35" X 35"

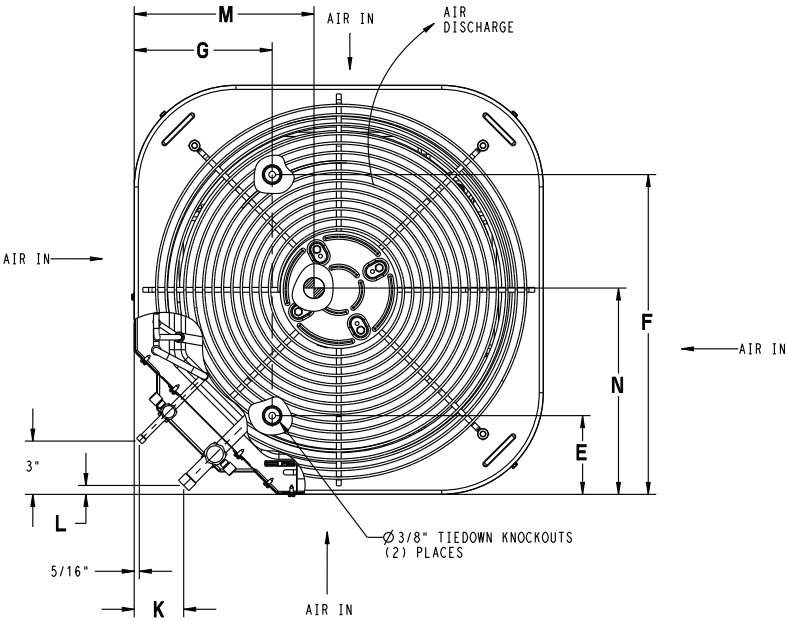


DIMENSIONS – SI

UNIT	SERIES	ELECTRICAL CHARACTERISTICS		A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (Kgs)	SHIPPING WEIGHT (Kgs)	SHIPPING DIMENSIONS (L x W x H)
PA13NA024	B	X	O	O	587.4	630.2	95.2	19.0	112.7	458.8	198.4	71.4	304.8	298.4	301.6	48.5	55.8	612.8 X 612.8 X 690.6
PA13NA030	B	X	O	O	587.4	722.3	95.2	19.0	112.7	458.8	198.4	71.4	304.8	298.4	317.5	49.9	57.2	612.8 X 612.8 X 777.9
PA13NA036	E	X	O	O	587.4	893.8	98.4	22.2	112.7	458.8	198.4	71.4	304.8	298.4	349.2	58.2	64.5	612.8 X 612.8 X 950.9
PA13NA042	E	X	O	O	792.2	808.0	98.4	22.2	166.7	627.1	231.8	74.6	406.4	393.7	349.2	74.4	80.9	817.6 X 817.6 X 863.6
PA13NA048	E	X	O	O	792.2	893.8	98.4	22.2	166.7	627.1	231.8	74.6	406.4	393.7	393.7	79.1	85.0	817.6 X 817.6 X 950.9
PA13NA060	E	X	O	O	792.2	722.3	98.4	22.2	166.7	627.1	231.8	74.6	406.4	393.7	323.8	88.6	95.5	817.6 X 817.6 X 777.9
PA13PA036	B	O	O	X	587.4	893.8	98.4	22.2	112.7	458.8	198.4	71.4	304.8	298.4	349.2	58.2	64.5	612.8 X 612.8 X 950.9
PA13PA048	D	O	O	X	792.2	893.8	98.4	22.2	166.7	627.1	231.8	74.6	406.4	393.7	393.7	79.1	85.0	817.6 X 817.6 X 950.9
PA13PA060	B	O	O	X	792.2	722.3	98.4	22.2	166.7	627.1	231.8	74.6	406.4	393.7	323.8	88.6	95.5	817.6 X 817.6 X 777.9


X = YES
O = NO

208-230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

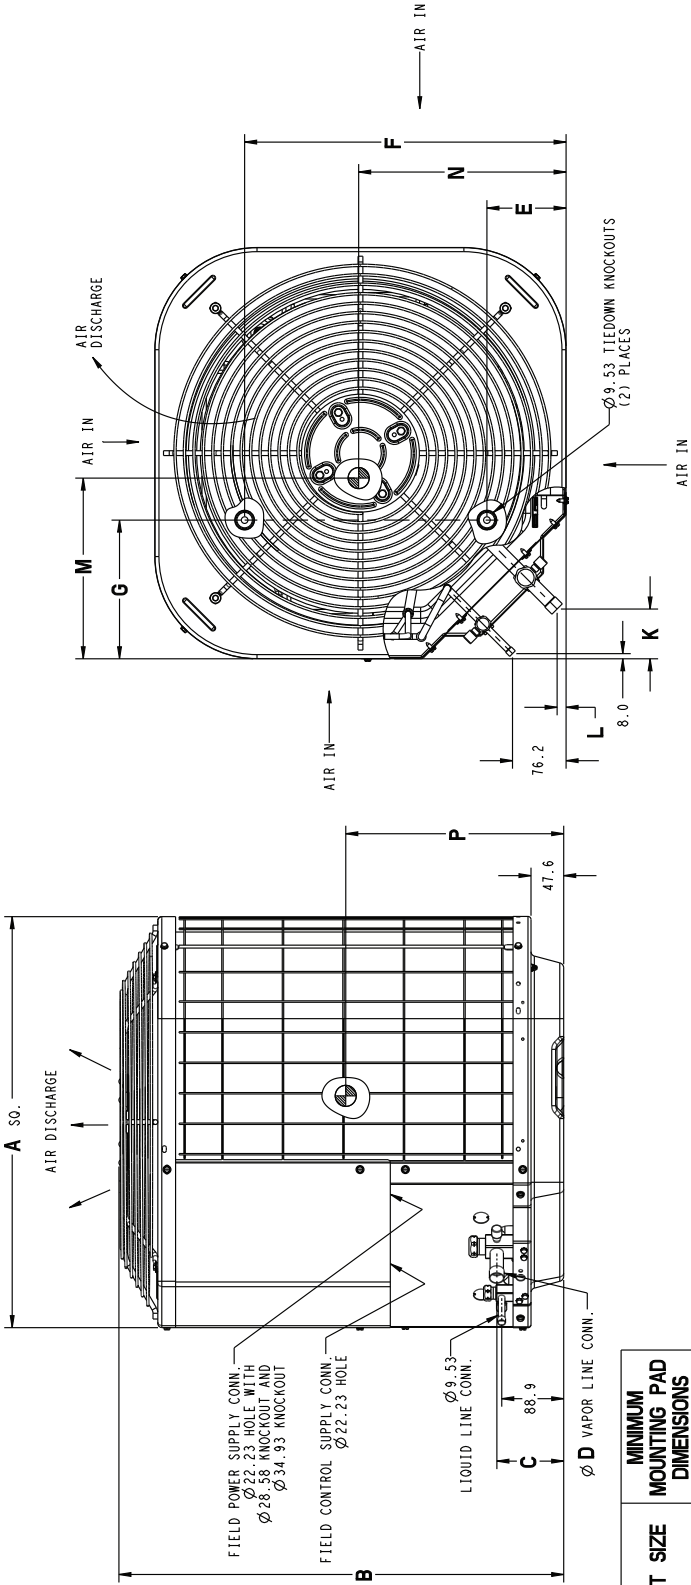

UNIT SIZE	MINIMUM MOUNTING PAD DIMENSIONS
24, 30, 36	596.9 X 596.9
42, 48, 60	660.4 X 660.4
72, 84, 96	800.1 X 800.1
108, 120, 144	889.0 X 889.0

CLEARANCES

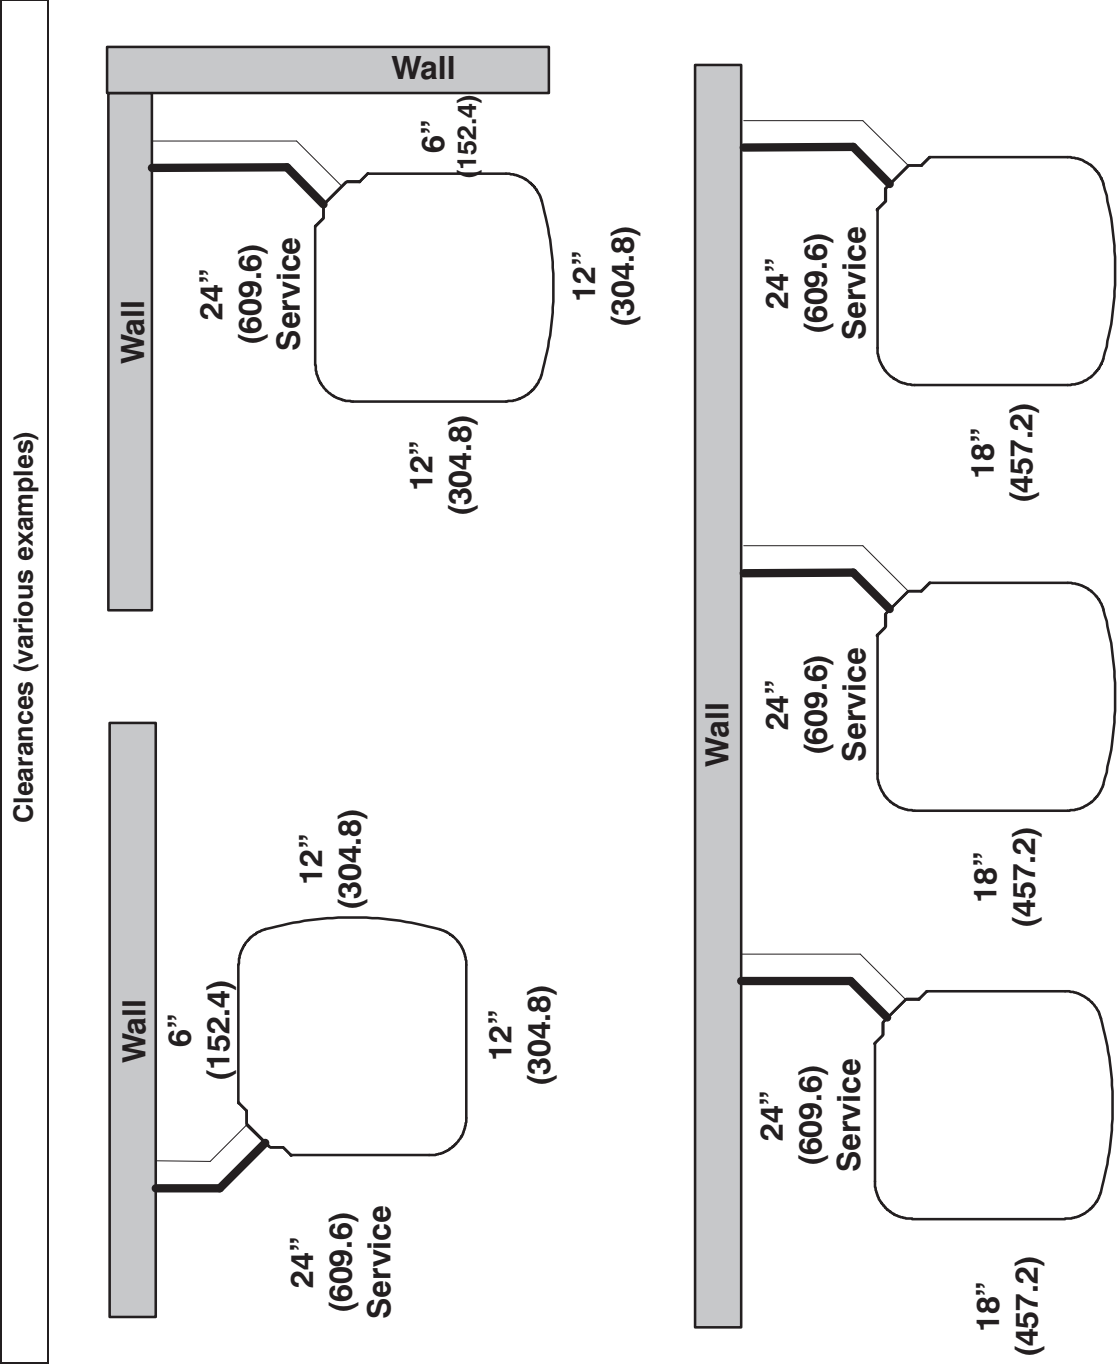

Note: Numbers in () = mm

IMPORTANT: When installing multiple units in an alcove, roof well, or partially enclosed area, ensure there is adequate ventilation to prevent re-circulation of discharge air.

REFRIGERANT CHARGE ADJUSTMENTS

Liquid Line Size	R-410A Charge oz/ft
3/8	0.60 (Factory charge for lineset = 9 oz)
5/16	0.40
1/4	0.27

Units are factory charged for 15 ft (4.6 m) of 3/8" liquid line. The factory charge for 3/8" lineset 9 oz. When using other length or diameter liquid lines, charge adjustments are required per the chart above.

Charging Formula:

$[(\text{Lineset oz/ft} \times \text{total length}) - (\text{factory charge for lineset})] = \text{charge adjustment}$

Example 1: System has 15 ft of line set using existing 1/4" liquid line. What charge adjustment is required?

Formula: $(.27 \text{ oz/ft} \times 15\text{ft}) - (9 \text{ oz}) = (-4.95) \text{ oz.}$

Net result is to remove 4.95 oz of refrigerant from the system

Example 2: System has 45 ft of existing 5/16" liquid line. What is the charge adjustment?

Formula: $(.40 \text{ oz/ft.} \times 45\text{ft}) - (9 \text{ oz.}) = 9 \text{ oz.}$

Net result is to add 9 oz of refrigerant to the system

LONG LINE APPLICATIONS

An application is considered Long Line, when the refrigerant level in the system requires the use of accessories to maintain acceptable refrigerant management for systems reliability. See Accessory Usage Guideline table for required accessories. Defining a system as long line depends on the liquid line diameter, actual length of the tubing, and vertical separation between the indoor and outdoor units.

For Air Conditioner systems, the chart below shows when an application is considered Long Line.

AC WITH R-410A REFRIGERANT LONG LINE DESCRIPTION ft (m) Beyond these lengths, long line accessories are required

Liquid Line Size	Units On Same Level	Outdoor Below Indoor	Outdoor Above Indoor
1/4	No accessories needed within allowed lengths	No accessories needed within allowed lengths	175 (53.3)
5/16	120 (36.6)	50 (15.2)	120 (36.6)
3/8	80 (24.4)	35 (10.7)	80 (24.4)

Note: See Long Line Guideline for details

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

Acceptable vapor line diameters provide adequate oil return to the compressor while avoiding excessive capacity loss. The suction line diameters shown in the chart below are acceptable for AC systems with R-410A refrigerant:

Unit Nominal Size (Btu/h)	Maximum Liquid Line Diameters (In. OD)	Vapor Line Diameters (In. OD)	Cooling Capacity Loss (%) Total Equivalent Line Length ft. (m)								
			26-50 (7.9-15.2)	51-80 (15.5-24.4)	81-100 (24.7-30.5)	101-125 (30.8-38.1)	126-150 (38.4-45.7)	151-175 (46.0-53.3)	176-200 (53.6-61.0)	201-225 (61.3-68.6)	226-250 (68.9-76.2)
24000 1 Stage AC with R-410A	3/8	5/8	0	1	2	2	3	3	4	5	5
		3/4	0	0	1	1	1	1	1	2	2
		7/8	0	0	0	0	0	1	1	1	1
30000 1 Stage AC with R-410A	3/8	5/8	1	2	3	3	4	5	6	7	8
		3/4	0	0	1	1	1	2	2	2	3
		7/8	0	0	0	0	1	1	1	1	1
36000 1 Stage AC with R-410A	3/8	5/8	1	2	4	5	6	8	9	10	12
		3/4	0	1	1	2	2	3	3	4	4
		7/8	0	0	0	1	1	1	1	2	2
42000 1 Stage AC with R-410A	3/8	3/4	0	1	2	2	3	4	4	5	6
		7/8	0	0	1	1	1	2	2	2	3
		1 1/8	0	0	0	0	0	0	0	0	0
48000 1 Stage AC with R-410A	3/8	3/4	0	1	2	3	4	5	5	6	7
		7/8	0	0	1	1	2	2	2	3	3
		1 1/8	0	0	0	0	0	0	0	1	1
60000 1 Stage AC with R-410A	3/8	3/4	1	2	4	5	6	7	9	10	11
		7/8	0	1	2	2	3	4	4	5	5
		1 1/8	0	0	0	1	1	1	1	1	1

Applications in this area may be long line and may have height restrictions. See the *Residential Piping and Long Line Guideline*.

A-WEIGHTED SOUND POWER (dBA)

UNIT SIZE – SERIES	Standard Rating (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA without tone adjustment)						
		125	250	500	1000	2000	4000	8000
024–B	76	50.5	61.0	67.0	68.0	65.0	60.0	55.5
030–B	72	52.0	61.5	65.5	66.5	64.5	59.5	54.5
036–E/B	75	57.0	61.5	68.5	70.0	67.0	62.5	54.0
042–E	75	56.0	64.5	69.5	71.0	66.0	64.0	59.0
048–E/D	76	54.0	63.0	69.5	71.5	70.0	66.0	58.5
060–E/B	79	57.5	67.0	72.0	75.0	72.5	68.0	61.0

NOTE: Tested in accordance with AHRI Standard 270–2008 (not listed in AHRI).

A-WEIGHTED SOUND POWER (dBA) WITH SOUND SHIELD

UNIT SIZE – SERIES	Standard Rating (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA without tone adjustment)						
		125	250	500	1000	2000	4000	8000
024–B	73	53.0	62.0	67.5	68.0	65.0	60.0	53.5
030–B	71	54.0	61.5	65.5	66.0	63.5	58.5	52.0
036–E/B	74	57.0	61.5	67.5	70.0	66.5	62.5	56.0
042–E	74	55.5	64.0	69.0	69.5	65.5	63.5	57.5
048–E/D	76	55.0	63.0	69.5	71.0	68.5	65.0	58.0
060–E/B	79	57.5	68.0	72.5	74.5	72.5	68.0	60.5

NOTE: Tested in accordance with AHRI Standard 270–2008 (not listed in AHRI).

METERING DEVICE

UNIT SIZE–SERIES	INDOOOR	REQUIRED SUBCOOLING °F (°C)
024–B	TXV*	10(5.6)
030–B		10(5.6)
036–E		12(6.7)
036–B		10(5.6)
042–E		12(6.7)
048–E		15(8.3)
048–D		10(5.6)
060–E		15(8.3)
060–B		10(5.6)

* TXV must be ordered separately when indoor coil is not equipped with a TXV. TXV must be hard–shutoff type.

ACCESSORY USAGE GUIDELINE

ACCESSORY	REQUIRED FOR LOW AMBIENT COOLING APPLICATIONS (Below 55°F / 22.8°C)	REQUIRED FOR LONG LINE APPLICATIONS* (Over 80 Ft./24.4 m)	REQUIRED FOR SEA COAST APPLICATIONS (Within 2 miles/3.2 km)
Ball Bearing Fan Motor	Yes†	No	No
Compressor Start Assist Capacitor and Relay	Yes	Yes	No
Crankcase Heater	Yes	Yes	No
Evaporator Freeze Thermostat	Yes	No	No
Hard Shut—Off TXV	Yes	Yes	Yes
Liquid Line Solenoid Valve	No	See Long—Line Application Guideline	No
Low Ambient Kit (Pressure Switch)	Yes	No	No
Support Feet	Recommended	No	Recommended
Winter Start Control	Yes	No	No

* For tubing line sets between 80 and 200 ft. (24.4 and 76.2 m) and/or 20 ft. (6.1 m) vertical differential, refer to Residential Split—System Longline Application Guideline.

† Required for Low Ambient Controller (full modulation feature) and MotorMaster® Control only.

Accessory Description and Usage (Listed Alphabetically)

1. Compressor Start Assist – Capacitor and Relay

Start capacitor and relay gives a "hard" boost to compressor motor at each start up.

Usage Guideline:

Required for reciprocating compressors in the following applications:

- Long line
- Low ambient cooling
- Hard shut off expansion valve on indoor coil
- Liquid line solenoid on indoor coil

Required for single-phase scroll compressors in the following applications:

- Long line
- Low ambient cooling

Suggested for all compressors in areas with a history of low voltage problems.

2. Compressor Start Assist — PTC Type

Solid state electrical device which gives a "soft" boost to the compressor at each start-up.

Usage Guideline:

Suggested in installations with marginal power supply.

3. Crankcase Heater

An electric resistance heater which mounts to the base of the compressor to keep the lubricant warm during off cycles. Improves compressor lubrication on restart and minimizes the chance of liquid slugging.

Usage Guideline:

- Required in low ambient cooling applications.
- Required in long line applications.

4. Cycle Protector

The cycle protector is designed to prevent compressor short cycling. This control provides an approximate 5-minute delay after power to the compressor has been interrupted for any reason, including power outage, protector control trip, thermostat jiggling, or normal cycling.

Suggested in all commercial applications.

5. Evaporator Freeze Thermostat

An SPST temperature actuated switch that stops unit operation when evaporator reaches freeze-up conditions.

Usage Guideline:

Required when low ambient kit has been added.

6. Low Ambient Pressure Switch Kit

A long life pressure switch which is mounted to outdoor unit service valve. It is designed to cycle the outdoor fan motor in order to maintain head pressure within normal operating limits (approximately 100 psig to 225 psig). The control will maintain working head pressure at low ambient temperatures down to 0°F/-17.8°C when properly installed.

Usage Guideline:

A Low Ambient Pressure Switch or MotorMaster® Low Ambient Controller must be used when cooling operation is used at outdoor temperatures below 55°F (12.8°C).

Suggested for all commercial applications.

7. Support Feet

Four stick-on plastic feet that raise the unit 4 in. (101.6 mm) above the mounting pad. This allows sand, dirt, and other debris to be flushed from the unit base, minimizing corrosion.

Usage Guideline:

Suggested in the following applications:

- Coastal installations.
- Windy areas or where debris is normally circulating.
- Rooftop installations.
- For improved sound ratings.

8. Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Kit includes valve, adapter tubes, and external equalizer tube. Hard shut off types are available.

NOTE: When using a hard shut off TXV with single phase reciprocating compressors, a Compressor Start Assist Capacitor and Relay is required.

Usage Guideline:

- Required to achieve AHRI ratings in certain equipment combinations. Refer to combination ratings.
- Hard shut off TXV or LLS required in air conditioner long line applications.
- Required for use on all zoning systems.

9. Winter Start Control

This control is designed to alleviate nuisance opening of the low-pressure switch by bypassing it for the first 3 minutes of operation.

TESTED AHRI COMBINATION RATINGS*

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory www.ahridirectory.org

Additional ratings and system combinations can be accessed via the Payne database at:

http://cactaxcredits.info/payne-ratings/hp_ratings_srch.php

Model Number	Indoor Coil Model Number	Furnace Model Number	Cooling Capacity	EER	SEER
PA13NA024****B	CAP**2414AL*+TDR		23,000	11.0	13.0
PA13NA030****B	CAP**3014AL*+TDR		27,200	10.8	13.0
PA13NA036****E	CAP**4821AL*+TDR		34,000	11.0	13.0
PA13NA042****B	CAP**4221AL*+TDR		39,500	11.0	13.0
PA13NA048****E	CAP**4821AL*+TDR		45,500	11.0	13.0
PA13NA060****E	CAP**6024AL*+TDR		57,000	11.0	13.0
PA13PA036****B	CAP**4821AL*+TDR		34,000	11.0	13.0
PA13PA048****D	CAP**4821AL*+TDR		46,000	11.0	13.0
PA13PA060****B	CAP**6024AL*+TDR		57,000	11.0	13.0

EER — Energy Efficiency Ratio

SEER — Seasonal Energy Efficiency Ratio

TDR — Time–Delay Relay. In most cases, only 1 method should be used to achieve TDR function. Using more than 1 method in a system may cause degradation in performance. Use either the accessory Time–Delay Relay KAATD0101TDR or a furnace equipped with TDR. Most Payne furnaces are equipped with TDR.

NOTES:

1. Ratings are net values reflecting the effects of circulating fan motor heat. Supplemental electric heat is not included.
2. Tested outdoor/indoor combinations have been tested in accordance with DOE test procedures for central air conditioners. Ratings for other combinations are determined under DOE computer simulation procedures.
3. Determine actual CFM values obtainable for your system by referring to fan performance data in fan coil or furnace coil literature.
4. Do not apply with capillary tube coils as performance and reliability are affected.

DETAILED COOLING CAPACITIES#

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (°C)															
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)						
		Capacity MBtuh		Total Sys-tem KW**	Capacity MBtuh		Total Sys-tem KW**	Capacity MBtuh		Total Sys-tem KW**	Capacity MBtuh		Total Sys-tem KW**				
CFM	EWB °F (°C)	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Capacity MBtuh	Total	Sens†	115 (46.1)
PA13NA024(G) – B Outdoor Section With CAP**2414A** Indoor Section																	
700	72 (22.2)	27.06	13.28	1.64	25.82	12.84	1.84	24.64	12.43	2.06	23.44	12.02	2.30	22.11	11.56	2.57	
	67 (19.4)	24.87	16.41	1.64	23.82	16.00	1.84	22.70	15.57	2.05	21.55	15.13	2.30	20.29	14.66	2.57	
	62 (16.7)	22.98	19.55	1.63	22.00	19.12	1.83	20.97	18.66	2.05	19.91	18.18	2.30	18.87	18.87	2.57	
	57 (13.9)	22.41	22.41	1.63	21.61	21.61	1.83	20.75	20.75	2.05	19.85	19.85	2.30	18.87	18.87	2.57	
	52 (12.2)	27.49	13.93	1.68	26.14	13.46	1.88	24.93	13.05	2.10	23.69	12.64	2.34	22.33	12.18	2.60	
800	72 (22.2)	25.24	17.44	1.68	24.15	17.03	1.87	23.00	16.60	2.09	21.83	16.16	2.33	20.54	15.69	2.60	
	67 (19.4)	23.44	20.97	1.67	22.46	20.51	1.87	21.49	21.49	2.09	20.55	20.55	2.33	19.52	19.52	2.60	
	62 (16.7)	23.25	23.25	1.67	22.40	22.40	1.87	21.49	21.49	2.09	20.55	20.55	2.33	19.52	19.52	2.60	
	57 (13.9)	23.25	23.25	1.71	26.38	14.07	1.91	25.12	13.65	2.13	23.86	13.23	2.38	22.46	12.77	2.64	
	52 (12.2)	27.76	14.53	1.72	26.38	14.07	1.91	25.12	13.65	2.13	23.86	13.23	2.38	22.46	12.77	2.64	
900	67 (19.4)	25.50	18.44	1.71	24.39	18.03	1.91	23.21	17.59	2.13	22.02	17.15	2.37	20.70	16.66	2.64	
	62 (16.7)	23.92	23.92	1.71	23.03	23.03	1.91	22.08	22.08	2.13	21.10	21.10	2.37	20.02	20.02	2.64	
	57 (13.9)	23.92	23.92	1.71	23.04	23.04	1.91	22.08	22.08	2.13	21.10	21.10	2.37	20.02	20.02	2.64	

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CAP**3017A**	1.00	0.92	PG9MMA036080
CNPV*2417A**	1.00	0.96	PG9MMA036080
CNPV*3017A**	1.00	0.92	PG9MMA036080
CNPV*3117A**	1.02	0.90	PG9MMA036080
CNPV*2417A**	1.00	0.96	PG9MMA036080
CNPV*3017A**	1.00	0.92	PG9MMA036080
CNPV*3117A**	1.02	0.90	PG9MMA036080
CSPH*2412A**	1.00	0.96	PG9MMA036080
CSPH*3012A**	1.00	0.92	PG9MMA036080
CAP**2417A**	1.01	0.92	PG9UAA042060
CAP**3017A**	1.02	0.93	PG9UAA042060
CNPV*2417A**	1.01	0.92	PG9UAA042060
CNPV*3017A**	1.02	0.93	PG9UAA042060
CNPV*3117A**	1.02	0.93	PG9UAA042060

DETAILED COOLING CAPACITIES# (CONT.)

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES °F (°C)														
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)		
CFM	EWB °F (°C)	Capacity MBtuHr		Total Sys-tem KW**	Capacity MBtuHr		Total Sys-tem KW**	Capacity MBtuHr		Total Sys-tem KW**	Capacity MBtuHr		Total Sys-tem KW**	Capacity MBtuHr		Total Sys-tem KW**
		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†	
875	72 (22.2)	31.88	16.54	1.97	30.55	16.06	2.21	29.17	15.57	2.48	27.73	15.07	2.77	26.14	14.51	3.10
	67 (19.4)	29.45	20.69	1.97	28.21	20.19	2.21	26.90	19.68	2.47	25.54	19.15	2.77	24.04	18.57	3.09
	62 (16.7)	27.29	24.80	1.96	26.15	24.27	2.20	24.96	23.68	2.47	23.83	23.83	2.76	22.65	22.65	3.09
	57 (13.9)	26.90	25.94	1.96	25.94	25.94	2.20	24.91	24.91	2.47	23.83	23.83	2.76	22.65	22.65	3.09
1000	72 (22.2)	32.25	17.34	2.02	30.87	16.86	2.26	29.45	16.36	2.53	27.98	15.86	2.82	26.34	15.30	3.14
	67 (19.4)	29.82	22.01	2.01	28.55	21.52	2.25	27.20	21.00	2.52	25.81	20.47	2.81	24.28	19.88	3.14
	62 (16.7)	27.85	27.62	2.01	26.81	26.81	2.25	25.72	25.72	2.51	24.59	24.59	2.81	23.35	23.35	3.14
	57 (13.9)	27.82	27.82	2.01	26.81	26.81	2.25	25.73	25.73	2.51	24.60	24.60	2.81	23.35	23.35	3.14
1125	72 (22.2)	32.50	18.10	2.07	31.08	17.61	2.31	29.63	17.12	2.57	28.13	16.61	2.87	26.46	16.05	3.19
	67 (19.4)	30.08	23.28	2.06	28.78	22.78	2.30	27.41	22.26	2.45	26.00	21.72	2.86	24.45	21.12	3.19
	62 (16.7)	28.55	28.55	2.06	27.50	27.50	2.30	26.36	26.36	2.56	25.19	25.19	2.86	23.89	23.89	3.18
	57 (13.9)	28.55	28.55	2.06	27.50	27.50	2.30	26.37	26.37	2.56	25.19	25.19	2.86	23.89	23.89	3.18

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL		
				COOLING INDOOR MODEL	FURNACE MODEL	
*CAP**3017A**	CAP**3017A**	1.00	1.00	1.01	PG8*EA048070	PG95XA*42060B***
	CAP**3017A**	1.00	1.00	1.00	PG8*EA048070	PG95XA*42060B***
	CAP**3614A**	1.00	1.00	1.02	PG8*EA048070	PG95XA*48080B***
	CAP**3617A**	1.00	1.00	1.00	PG8*EA048070	PG95XA*48080B***
	CAP**3619A**	1.01	1.01	0.94	PG8*EA048070	PG95XA*48080B***
	CAP**3621A**	1.00	1.00	0.90	PG8*EA048090	PG95XA*48080B***
	CAP**3621A**	1.00	1.00	0.94	PG8*EA048090	PG95XA*48080B***
	CNP**3017A**	1.00	1.00	1.01	PG8*EA048090	PG95XA*48080B***
	CNP**3017A**	1.00	1.00	0.91	PG8*EA048090	PG95XA*48080B***
	CNP**3117A**	1.01	1.00	0.91	PG8*EA048090	PG95XA*48080B***
CNPV*3017A**	CNPV*3017A**	1.00	1.00	1.00	PG8*EA048090	PG95XA*48080B***
	CNPV*3017A**	1.00	1.00	1.00	PG8*EA048090	PG95XA*48080B***
	CNPV*3017A**	1.00	1.00	1.00	PG8*EA048090	PG95XA*48080B***
	CNPV*3017A**	1.00	1.00	0.90	PG8*EA048090	PG95XA*48080B***
	CNPV*3117A**	1.01	1.00	0.99	PG95XA*30040A***	PG95XA*48080B***
	CNPV*3617A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CNPV*3621A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CNPV*3617A**	1.02	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CNPV*3017A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CNPV*3117A**	1.01	0.95	0.99	PG95XA*30040A***	PG95XA*48080B***
CSPH*3012A**	CSPH*3012A**	1.00	1.00	1.00	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.00	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
	CSPH*3012A**	1.00	1.00	1.05	PG95XA*30040A***	PG95XA*48080B***
PF4MNB037	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.94	1.02	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
	PF4MNB037	1.00	0.98	1.03	PG95XA*42060B***	PG95XA*48080B***
CAP**3017A**	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CAP**3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
CNPV*3017A**	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3017A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
CNPV*3117A**	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***
	CNPV*3117A**	1.00	0.94	1.01	PG95XA*42060B***	PG95XA*48080B***

DETAILED COOLING CAPACITIES# (CONT.)

PA13NA030(G) – B Outdoor Section With CAP**3014A** Indoor Section

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CSPH*3612A**	1.00	0.90	PG9MXXA036080
CAP**3017A**	1.00	0.94	PG9MXXA048080
CAP**3617A**	1.00	0.94	PG9MXXA048080
CNPH*3017A**	1.00	0.94	PG9MXXA048080
CNPH*3117A**	1.01	0.91	PG9MXXA048080
CNPH*3617A**	1.00	0.94	PG9MXXA048080
CNPV*3017A**	1.00	0.94	PG9MXXA048080
CNPV*3117A**	1.01	0.91	PG9MXXA048080
CNPV*3617A**	1.00	0.94	PG9MXXA048080
CNPV*3717A**	1.02	0.92	PG9MXXA048080
CSPH*3012A**	1.00	0.94	PG9MXXA048080
CSPH*3612A**	1.00	0.90	PG9MXXA048080
CAP**3017A**	1.01	0.95	PG9UAA042060
CAP**3617A**	1.01	0.95	PG9UAA042060
CNPV*3017A**	1.01	0.95	PG9UAA042060
CNPV*3117A**	1.02	0.92	PG9UAA042060
CNPV*3617A**	1.01	0.95	PG9UAA042060
CNPV*3717A**	1.03	0.93	PG9UAA042060
CAP**3621A**	1.00	0.94	PG9UAA042080
CNPV*3621A**	1.00	0.94	PG9UAA042080
CAP**3621A**	1.01	0.95	PG9UAA060080
CNPV*3621A**	1.01	0.95	PG9UAA060080
CAP**3621A**	1.00	0.94	PG9UAA060100
CNPV*3621A**	1.00	0.94	PG9UAA060100

See notes on pg. 19

DETAILED COOLING CAPACITIES# (CONT.)

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES °F (°C)														
CFM	EWB °F (°C)	75 (23.9)		85 (29.4)		95 (35)		105 (40.6)		115 (46.1)						
		Capacity MBtuHt Total	Sens†	Capacity MBtuHt Total	Sens†	Capacity MBtuHt Total	Sens†	Capacity MBtuHt Total	Sens†	Capacity MBtuHt Total	Sens†					
PA13NA036(G) – E-B Outdoor Section With CAP**4821A** Indoor Section																
1050	72 (22.2)	29.86	29.86	3.90	38.13	19.65	2.71	36.46	19.06	3.04	34.71	18.45	3.40	32.77	17.79	3.80
	67 (19.4)	36.66	25.23	2.41	35.22	24.67	2.71	33.64	24.05	3.03	31.99	23.42	3.40	30.17	22.72	3.79
	62 (16.7)	33.97	30.22	2.40	32.65	29.62	2.70	31.21	28.94	3.03	29.76	29.76	3.39	28.35	28.35	3.79
	57 (13.9)	33.42	33.42	2.40	32.30	32.30	2.70	31.07	31.07	3.03	29.78	29.78	3.39	28.35	28.35	3.79
	72 (22.2)	40.35	21.22	2.47	38.49	20.57	2.77	36.81	19.99	3.10	35.01	19.38	3.46	33.02	18.70	3.85
1200	67 (19.4)	37.10	26.78	2.47	35.62	26.22	2.76	34.00	25.60	3.09	32.31	24.96	3.45	30.45	24.26	3.85
	62 (16.7)	34.75	32.12	2.46	33.33	33.33	2.76	32.07	32.07	3.09	30.71	30.71	3.45	29.20	29.20	3.85
	57 (13.9)	34.54	34.54	2.46	33.37	33.37	2.76	32.07	32.07	3.09	30.71	30.71	3.45	29.20	29.20	3.85
	72 (22.2)	40.70	22.12	2.53	38.75	21.45	2.83	37.03	20.86	3.16	35.19	20.25	3.52	33.17	19.57	3.91
	67 (19.4)	37.49	28.29	2.52	35.90	27.69	2.82	34.25	27.07	3.15	32.53	26.42	3.51	30.65	25.71	3.90
1350	62 (16.7)	35.43	35.43	2.52	34.21	34.21	2.82	32.85	32.85	3.14	31.43	31.43	3.51	29.86	29.86	3.90
	57 (13.9)	35.43	35.43	2.52	34.21	34.21	2.82	32.85	32.85	3.14	31.43	31.43	3.51	29.86	29.86	3.90

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CAP**4821A**	1.00	1.00	
CAP**4817A**	1.00	1.00	
CAP**4824A**	1.00	1.00	
CNPH*4321A**	1.01	1.01	
CNPH*4821A**	1.00	1.00	
CNPH*4321A**	1.01	1.01	
CNPH*4324A**	1.01	1.01	
CNPH*4821A**	1.00	1.00	
CNPH*4824A**	1.00	1.00	
CNPH*4812A**	1.00	1.00	
FB4CNF036	0.96	0.96	
FB4CNF042	1.00	0.96	
FB4CNF048	1.01	0.97	
PF4MNA037	0.99	0.96	
PF4MNA043	0.97	0.97	
PF4MNB037	1.01	0.97	
PF4MNB043	1.01	0.97	
PF4MNB049	1.03	0.94	
CSPH*3612A**	0.99	0.97	PG8*EA024045
CSPH*4212A**	0.99	0.98	PG8*EA024045
CAP**3617A**	0.97	0.94	PG8*EA048070
CAP**4817A**	0.99	0.95	PG8*EA048070
CNPH*3617A**	0.96	0.95	PG8*EA048070
CNPH*4817A**	0.96	0.95	PG8*EA048070
CNPH*3617A**	0.96	0.95	PG8*EA048070
CNPH*4817A**	0.96	0.95	PG8*EA048070
CNPH*3717A**	1.01	0.96	PG8*EA048070
CNPH*4217A**	0.98	0.96	PG8*EA048070
CSPH*3612A**	0.99	0.95	PG8*EA048070
CSPH*4212A**	0.99	0.95	PG8*EA048070
CSPH*4812A**	1.00	0.96	PG8*EA048070
CAP**3621A**	0.98	0.92	PG8*EA048090
CAP**421A**	0.98	0.94	PG8*EA048090
CAP**4821A**	1.00	0.96	PG8*EA048090
CNPH*4221A**	0.98	0.94	PG8*EA048090
CNPH*4321A**	1.01	0.93	PG8*EA048090
CNPH*4821A**	1.00	0.96	PG8*EA048090
CNPH*3621A**	0.98	0.93	PG8*EA048090
CNPH*4221A**	0.98	0.94	PG8*EA048090

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPH*4821A**	1.00	0.96	PG8*EA048090
CSPH*3612A**	1.00	0.94	PG8*EA048090
CSPH*4212A**	0.98	0.94	PG8*EA048090
CSPH*4812A**	1.00	0.92	PG8*EA048090
CAP**3621A**	0.98	0.92	PG8*EA060110
CAP**4221A**	0.98	0.94	PG8*EA060110
CAP**4821A**	1.00	0.92	PG8*EA060110
CNPH*4221A**	0.98	0.94	PG8*EA060110
CNPH*4321A**	1.01	0.93	PG8*EA060110
CNPH*4821A**	1.00	0.92	PG8*EA060110
CNPH*3621A**	0.98	0.92	PG8*EA060110
CNPH*421A**	0.98	0.94	PG8*EA060110
CNPH*481A**	1.00	0.92	PG8*EA060110
CSPH*3612A**	1.00	0.94	PG8*EA060110
CSPH*4212A**	0.98	0.90	PG8*EA060110
CSPH*4812A**	1.00	0.92	PG8*EA060110
CAP**4824A**	1.00	0.92	PG8*EA060135
CNPH*4824A**	1.00	0.92	PG8*EA060135
CSPH*4812A**	1.00	0.92	PG8*EA060135
CAP**3614A**	0.97	0.94	PG8*VA036070
CSPH*3612A**	0.99	0.95	PG8*VA036070
CSPH*4212A**	0.99	0.93	PG8*VA036070
CSPH*4812A**	0.99	0.93	PG8*VA036070
CAP**3617A**	0.98	0.93	PG8*VA048090
CAP**4817A**	0.99	0.93	PG8*VA048090
CNPH*3617A**	0.97	0.93	PG8*VA048090
CNPH*4217A**	0.97	0.93	PG8*VA048090
CNPH*3717A**	1.01	0.95	PG8*VA048090
CNPH*4217A**	0.99	0.93	PG8*VA048090
CSPH*3612A**	0.99	0.95	PG8*VA048090
CSPH*4212A**	0.99	0.95	PG8*VA048090
CSPH*4812A**	1.00	0.96	PG8*VA048090
CAP**3621A**	0.98	0.92	PG8*VA048090
CAP**4221A**	0.98	0.92	PG8*VA060110
CAP**4821A**	1.00	0.93	PG8*VA060110
CNPH*4221A**	0.98	0.94	PG8*VA060110
CNPH*4321A**	1.01	0.93	PG8*VA060110

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPH*4821A**	0.99	0.91	PG8*VA060110
CNPH*3621A**	0.97	0.93	PG8*VA060110
CNPH*4221A**	0.98	0.94	PG8*VA060110
CNPH*4821A**	0.99	0.91	PG8*VA060110
CSPH*3612A**	0.99	0.93	PG8*VA060110
CSPH*4212A**	1.00	0.94	PG8*VA060110
CSPH*4812A**	1.00	0.92	PG8*VA060110
CAP**4224A**	0.98	0.92	PG8*VA066135
CAP**4824A**	0.99	0.91	PG8*VA066135
CNPH*4324A**	1.01	0.91	PG8*VA066135
CNPH*4824A**	0.99	0.91	PG8*VA066135
CSPH*3612A**	0.99	0.93	PG8*VA066135
CSPH*4212A**	1.00	0.94	PG8*VA066135
CSPH*4812A**	1.00	0.92	PG8*VA066135
CAP**3617A**	0.97	0.94	PG95XA*42060B***
CAP**4817A**	0.99	0.95	PG95XA*42060B***
CNPH*3617A**	0.97	0.94	PG95XA*42060B***
CNPH*4217A**	0.97	0.94	PG95XA*42060B***
CNPH*3717A**	1.01	0.96	PG95XA*42060B***
CNPH*4217A**	0.99	0.95	PG95XA*42060B***
CSPH*4212A**	0.99	0.95	PG95XA*42060B***
CSPH*4812A**	1.00	0.96	PG95XA*42060B***
CSPH*4812A**	1.00	0.96	PG95XA*42060B***
CAP**3617A**	0.97	0.94	PG95XA*48080B***
CAP**4817A**	0.99	0.93	PG95XA*48080B***
CNPH*3617A**	0.97	0.94	PG95XA*48080B***
CNPH*4217A**	0.97	0.94	PG95XA*48080B***
CNPH*3717A**	1.01	0.94	PG95XA*48080B***
CNPH*4217A**	0.99	0.95	PG95XA*48080B***
CSPH*3612A**	0.99	0.93	PG95XA*48080B***
CSPH*4212A**	1.00	0.93	PG95XA*48080B***
CSPH*4812A**	0.99	0.93	PG95XA*48080B***
CAP**4821A**	1.01	0.97	PG95XA*60080C***
CNPH*4821A**	1.02	0.96	PG95XA*60080C***
CNPH*421A**	1.02	0.96	PG95XA*60080C***
CSPH*4812A**	1.02	0.96	PG95XA*60080C***
CAP**3621A**	0.99	0.95	PG95XA*60100C***

DETAILED COOLING CAPACITIES# (CONT.)

PAT3NA036(G)–E-B Outdoor Section With CAP**4821A** Indoor Section

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CSPH*4212A**	1.00	0.94	PG96VA*60100C***
CSPH*4812A**	1.00	0.92	PG96VA*60100C***
CAP**4224A**	0.99	0.93	PG96VA*66120D***
CAP**4824A**	0.99	0.93	PG96VA*66120D***
CNPV*4324A**	1.02	0.93	PG96VA*66120D***
CNPV*4824A**	1.00	0.94	PG96VA*66120D***
CSPH*3612A**	0.99	0.93	PG96VA*66120D***
CSPH*4212A**	1.00	0.94	PG96VA*66120D***
CSPH*4812A**	1.00	0.94	PG96VA*66120D***

See notes on pg. 19

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CAP**4221A**	1.00	0.96	PG95XA*60100C***
CAP**4821A**	1.01	0.95	PG95XA*60100C***
CNPV*4221A**	0.99	0.95	PG95XA*60100C***
CNPV*4321A**	1.03	0.94	PG95XA*60100C***
CNPV*4821A**	1.01	0.95	PG95XA*60100C***
CNPV*3621A**	0.98	0.96	PG95XA*60100C***
CNPV*4221A**	0.99	0.95	PG95XA*60100C***
CNPV*4821A**	1.01	0.95	PG95XA*60100C***
CSPH*3612A**	1.02	0.96	PG95XA*60100C***
CSPH*4212A**	1.02	0.96	PG95XA*66120D***
CSPH*4812A**	1.02	0.96	PG95XA*66120D***
CAP**3617A**	0.97	0.95	PG96VA*42060B***
CAP**4817A**	0.99	0.95	PG96VA*42060B***
CNPV*3617A**	0.96	0.95	PG96VA*42060B***
CNPV*3617A**	0.96	0.95	PG96VA*42060B***
CNPV*3717A**	1.01	0.96	PG96VA*42060B***
CNPV*4217A**	0.99	0.96	PG96VA*42060B***
CSPH*3612A**	0.99	0.96	PG96VA*42060B***
CSPH*4212A**	1.00	0.97	PG96VA*42060B***
CSPH*4812A**	0.98	0.95	PG96VA*42060B***
CAP**3617A**	0.99	0.95	PG96VA*48080B***
CAP**4817A**	0.99	0.93	PG96VA*48080B***
CNPV*3617A**	0.97	0.94	PG96VA*48080B***
CNPV*3617A**	0.97	0.94	PG96VA*48080B***
CNPV*3717A**	1.01	0.95	PG96VA*48080B***
CNPV*4217A**	0.99	0.95	PG96VA*48080B***
CSPH*3612A**	0.99	0.95	PG96VA*48080B***
CSPH*4212A**	1.00	0.96	PG96VA*48080B***
CSPH*4812A**	1.00	0.94	PG96VA*48080B***
CAP**3621A**	0.98	0.93	PG96VA*60080C***
CAP**4221A**	0.98	0.92	PG96VA*60080C***
CAP**4821A**	0.99	0.93	PG96VA*60080C***
CNPV*4221A**	0.99	0.93	PG96VA*60080C***
CNPV*4821A**	1.01	0.93	PG96VA*60080C***
CNPV*3621A**	0.97	0.93	PG96VA*60080C***
CNPV*4221A**	0.98	0.94	PG96VA*60080C***
CNPV*4821A**	1.00	0.94	PG96VA*60080C***
CSPH*3612A**	0.99	0.93	PG96VA*60080C***
CSPH*4212A**	1.00	0.94	PG96VA*60080C***
CSPH*4812A**	1.00	0.94	PG96VA*60080C***
CAP**3621A**	0.98	0.92	PG96VA*60100C***
CAP**4221A**	0.98	0.92	PG96VA*60100C***
CAP**4821A**	0.99	0.93	PG96VA*60100C***
CNPV*4221A**	0.98	0.92	PG96VA*60100C***
CNPV*4321A**	1.01	0.93	PG96VA*60100C***
CNPV*4821A**	0.99	0.91	PG96VA*60100C***
CNPV*3621A**	0.97	0.93	PG96VA*60100C***
CNPV*4221A**	0.98	0.92	PG96VA*60100C***
CNPV*4821A**	1.00	0.94	PG96VA*60100C***
CSPH*3612A**	0.99	0.93	PG96VA*60100C***

DETAILED COOLING CAPACITIES# (CONT.)

EVAPORATOR AIR				CONDENSER ENTERING AIR TEMPERATURES °F (°C)													
CFM	EWB °F (°C)	75 (23.9)		85 (29.4)		95 (35)		105 (40.6)		115 (46.1)							
		Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**						
		Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†						
1225	72 (22.2)	46.73	23.07	2.89	2.89	44.70	22.34	3.20	42.56	21.57	3.54	40.30	20.78	3.82	37.86	19.94	4.34
	67 (19.4)	42.85	28.38	2.87	2.87	40.97	27.64	3.18	38.98	26.86	3.52	36.89	26.05	3.91	34.65	25.19	4.33
	62 (16.7)	39.35	33.67	2.86	32.90	37.65	32.90	3.17	35.87	32.09	3.51	34.03	31.22	3.90	32.16	32.16	4.32
	57 (13.9)	38.30	38.30	2.85	36.91	36.91	36.91	3.17	35.44	35.44	3.51	33.88	33.88	3.90	32.18	32.18	4.32
	72 (22.2)	47.42	24.09	2.96	2.96	45.31	23.35	3.27	43.09	22.57	3.61	40.75	21.77	3.99	38.23	20.92	4.40
1400	67 (19.4)	43.52	30.05	2.94	2.94	41.57	29.29	3.25	39.50	28.50	3.59	37.35	27.69	3.97	35.04	26.83	4.39
	62 (16.7)	40.18	35.98	2.93	38.46	38.46	35.17	3.24	36.65	36.65	3.58	35.04	35.04	3.96	33.24	33.24	4.39
	57 (13.9)	39.77	39.77	2.92	38.29	38.29	38.29	3.23	36.71	36.71	3.58	35.04	35.04	3.96	33.24	33.24	4.39
	72 (22.2)	47.94	25.07	3.02	45.76	45.76	24.32	3.33	43.48	23.54	3.67	41.08	22.73	4.05	38.49	21.87	4.47
	67 (19.4)	44.03	31.67	3.01	42.02	42.02	30.91	3.31	39.90	30.12	3.66	37.70	29.30	4.04	35.34	28.42	4.46
1575	62 (16.7)	40.98	40.58	2.99	40.58	39.39	39.39	3.30	37.73	37.73	3.65	35.97	35.97	4.03	34.07	34.07	4.45
	57 (13.9)	40.96	40.96	2.99	39.40	39.40	39.40	3.30	37.74	37.74	3.65	35.98	35.98	4.03	34.07	34.07	4.45

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL	
*CAP**4221A**		1.00	1.00		
CAP**4224A**		1.00	1.00		
CAP**4817A**		1.01	1.01		
CAP**4821A**		1.01	1.01		
CAP**4824A**		1.01	1.01		
CNPF*4818A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CNPH*4221A**		1.00	1.00		
CNPH*4821A**		1.01	1.01		
CNPH*4824A**		1.01	1.01		
CN					

DETAILED COOLING CAPACITIES# (CONT.)

PA13NAQ42(G) – B Outdoor Section With CAP**4221A** Indoor Section

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPV*4821A**	1.04	0.95	PG95XA*60100C***
CNPV*4824A**	1.04	0.98	PG95XA*60100C***
CSPH*4212A**	1.04	0.98	PG95XA*60100C***
CSPH*4812A**	1.04	0.95	PG95XA*60100C***
CAP**4224A**	1.03	0.98	PG95XA*66120D***
CAP**4823A**	1.04	0.97	PG95XA*66120D***
CAP**4824A**	1.04	0.97	PG95XA*66120D***
CNPV*4221A**	1.01	0.97	PG95XA*66120D***
CNPV*4321A**	1.05	0.98	PG95XA*66120D***
CNPV*4821A**	1.04	0.97	PG95XA*66120D***
CNPV*4324A**	1.06	0.97	PG95XA*66120D***
CNPV*4824A**	1.04	0.97	PG95XA*66120D***
CSPH*4212A**	1.04	0.97	PG95XA*66120D***
CSPH*4812A**	1.05	0.98	PG95XA*66120D***
CAP**4817A**	1.00	0.96	PG9MXA036060
CNPV*4221A**	0.99	0.94	PG9MXA036060
CNPV*4821A**	1.01	0.97	PG9MXA036060
CNPV*4217A**	0.99	0.94	PG9MXA036060
CSPH*4212A**	0.99	0.94	PG9MXA036060
CSPH*4812A**	1.00	0.96	PG9MXA036060
CAP**4817A**	1.00	0.96	PG9MXA036080
CNPV*4221A**	0.99	0.94	PG9MXA036080
CNPV*4821A**	1.01	0.93	PG9MXA036080
CNPV*4217A**	0.99	0.94	PG9MXA036080
CSPH*4212A**	0.99	0.91	PG9MXA036080
CSPH*4812A**	1.00	0.92	PG9MXA048080
CAP**4221A**	0.99	0.94	PG9MXA060100
CAP**4821A**	1.00	0.92	PG9MXA060100
CAP**4823A**	1.00	0.92	PG9MXA060100
CNPV*4221A**	0.99	0.94	PG9MXA060100
CNPV*4821A**	1.00	0.92	PG9MXA060100
CNPV*4221A**	0.99	0.94	PG9MXA060100
CNPV*4821A**	1.01	0.93	PG9MXA060100
CSPH*4212A**	0.99	0.91	PG9MXA060100
CSPH*4812A**	1.00	0.92	PG9MXA060100
CAP**4224A**	0.99	0.91	PG9MXA060120
CAP**4824A**	1.00	0.92	PG9MXA060120
CNPV*4221A**	0.99	0.94	PG9MXA060120
CNPV*4821A**	1.00	0.92	PG9MXA060120
CNPV*4824A**	1.01	0.93	PG9MXA060120
CSPH*4212A**	0.99	0.91	PG9MXA060120
CAP**4817A**	1.01	0.97	PG9UAA042060
CNPV*4217A**	1.03	1.03	PG9UAA042060
CAP**4221A**	1.01	1.01	PG9UAA042080
CAP**4821A**	1.03	1.03	PG9UAA042080
CNPV*4221A**	1.01	1.01	PG9UAA042080
CNPV*4821A**	1.03	1.03	PG9UAA042080

See notes on pg. 19

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CAP**4221A**	1.01	1.01	PG9UAA060080
CAP**4821A**	1.04	0.99	PG9UAA060080
CNPV*4221A**	1.01	1.01	PG9UAA060080
CNPV*4821A**	1.03	0.98	PG9UAA060080
CAP**4221A**	1.01	1.01	PG9UAA060100
CAP**4821A**	1.04	0.99	PG9UAA060100
CNPV*4221A**	1.01	1.01	PG9UAA060100
CNPV*4821A**	1.03	0.98	PG9UAA060100
CAP**4224A**	1.01	0.97	PG9UAA060120
CAP**4824A**	1.04	0.99	PG9UAA060120
CNPV*4324A**	1.05	0.96	PG9UAA060120
CNPV*4824A**	1.04	0.99	PG9UAA060120

DETAILED COOLING CAPACITIES# (CONT.)

EVAPORATOR AIR			CONDENSER ENTERING AIR TEMPERATURES °F (°C)														
CFM	EWB °F (°C)	75 (23.9)		85 (29.4)				95 (35)				105 (40.6)		115 (46.1)		Total Sys-tem KW**	Total Sys-tem KW**
		Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**	Capacity MBtuHt	Total Sys-tem KW**				
PAT13NA048(G) –ED Outdoor Section With CAP**4821A** Indoor Section																	
1400	72 (22.2)	54.60	27.69	3.34	3.70	52.26	26.84	49.78	25.94	4.11	47.16	25.01	4.56	44.34	24.02	5.06	
	67 (19.4)	49.83	34.09	3.33	3.70	47.64	33.21	45.33	32.30	4.10	42.89	31.34	4.56	40.29	30.34	5.05	
	62 (16.7)	45.55	40.45	3.32	3.69	43.56	39.53	41.50	38.56	4.10	39.36	39.17	4.55	37.40	37.40	5.05	
	57 (13.9)	44.50	44.50	3.32	3.69	42.88	42.88	41.17	41.17	4.10	39.35	39.35	4.55	37.40	37.40	5.05	
	52 (11.1)	55.49	29.01	3.42	3.78	53.07	28.15	50.49	27.24	4.19	47.77	26.30	4.64	44.86	25.30	5.13	
1600	67 (19.4)	50.68	36.22	3.41	3.77	48.40	35.33	46.00	34.40	4.18	43.48	33.44	4.63	40.81	32.43	5.13	
	62 (16.7)	46.57	43.32	3.40	3.77	44.58	41.17	42.69	42.69	4.18	40.76	40.76	4.63	38.69	38.69	5.13	
	57 (13.9)	46.24	48.24	3.40	3.77	44.52	44.52	42.69	42.69	4.18	40.76	40.76	4.63	38.69	38.69	5.13	
	52 (11.1)	56.14	30.25	3.49	3.86	53.64	29.38	50.99	28.46	4.27	48.20	27.51	4.72	45.21	26.50	5.21	
	47 (11.1)	51.29	38.24	3.48	3.85	48.95	37.35	46.49	36.41	4.26	43.92	35.44	4.71	41.18	34.40	5.21	
1800	62 (16.7)	47.65	47.65	3.48	3.85	45.85	45.85	43.93	43.93	4.26	41.90	41.90	4.71	39.72	39.72	5.21	
	57 (13.9)	47.66	47.66	3.48	3.85	45.85	45.85	43.94	43.94	4.26	41.90	41.90	4.71	39.72	39.72	5.21	

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CAP**4821A**	1.00	1.00	
CAP**4817A**	1.00	1.00	
CAP**6021A**	1.02	1.02	
CAP**6024A**	1.02	1.02	
CNPH*6024A**	1.02	1.02	
CNPH*6124A**	1.02	1.02	
CNPH*6024A**	1.02	1.02	
CNPH*6124A**	1.03	1.03	
CSPH*4812A**	1.01	1.01	
CSPH*6012A**	1.02	1.02	
FB4CNFO48	0.99	0.99	
FB4CNFO60	1.01	0.97	
PF4MNA049	1.02	0.98	
PF4MNA061	1.03	0.99	
PF4MNB049	1.02	0.98	
PF4MNB061	1.04	0.96	
CAP**4821A**	0.99	0.99	PGB*EA048090
CAP**6021A**	1.01	0.97	PGB*EA048090
CNPH*4821A**	1.00	0.96	PGB*EA048090
CNPH*6024A**	1.01	0.97	PGB*EA048090
CNPH*4812A**	1.00	0.96	PGB*EA048090
CSPH*4812A**	1.02	0.98	PGB*EA048090
CSPH*6012A**	0.99	0.95	PGB*EA060110
CAP**4821A**	1.01	0.93	PGB*EA060110
CAP**6021A**	1.00	0.96	PGB*EA060110
CNPH*4821A**	1.01	0.93	PGB*EA060110
CNPH*6024A**	1.00	0.96	PGB*EA060110
CNPH*4812A**	1.00	0.96	PGB*EA060110
CSPH*4812A**	1.02	0.94	PGB*EA060110
CSPH*6012A**	0.99	0.95	PGB*EA060135
CAP**4824A**	1.01	0.97	PGB*EA060135
CAP**6024A**	1.01	0.97	PGB*EA060135
CNPH*6024A**	1.01	0.97	PGB*EA060135
CNPH*6124A**	1.00	0.96	PGB*EA060135
CNPH*4824A**	1.01	0.97	PGB*EA060135
CNPH*6024A**	1.01	0.97	PGB*EA060135
CNPH*6124A**	1.00	0.96	PGB*EA060135
CSPH*4812A**	1.02	0.98	PGB*EA060135
CSPH*6012A**	0.98	0.95	PGB*EA060135
CAP**4817A**	0.99	0.96	PGB**YA048090
CAP**4812A**	0.99	0.96	PGB**YA048090

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CSPH**6012A**	1.00	0.96	PG8*VA048090
CAP**4821A**	0.98	0.95	PG8*VA060110
CAP**6021A**	1.00	0.96	PG8*VA060110
CNPV*4821A**	0.98	0.94	PG8*VA060110
CNPV*4821A**	0.98	0.94	PG8*VA060110
CSPH*4812A**	0.99	0.96	PG8*VA060110
CSPH*6012A**	1.00	0.94	PG8*VA060110
CAP**4824A**	0.98	0.94	PG8*VA066135
CAP**6024A**	1.00	0.94	PG8*VA066135
CNPV*6024A**	1.00	0.94	PG8*VA066135
CNPV*6124A**	1.01	0.93	PG8*VA066135
CSPH*4812A**	0.99	0.95	PG8*VA066135
CSPH*6012A**	1.00	0.94	PG8*VA066135
CAP**4817A**	0.99	0.99	PG95XA*48080B***
CNPV*4821A**	0.99	0.99	PG95XA*48080B***
CNPV*4821A**	0.99	0.99	PG95XA*48080B***
CSPH*4812A**	0.99	0.97	PG95XA*48080B***
CSPH*6012A**	1.01	0.99	PG95XA*48080B***
CAP**4821A**	0.99	0.96	PG95XA*60080C***
CAP**4824A**	0.99	0.97	PG95XA*60080C***
CAP**6021A**	1.01	0.95	PG95XA*60080C***
CAP**6024A**	1.01	0.97	PG95XA*60080C***
CNPV*4821A**	1.00	0.96	PG95XA*60080C***
CNPV*6124A**	1.01	0.97	PG95XA*60080C***
CNPV*4821A**	1.00	0.96	PG95XA*60080C***
CNPV*4824A**	0.99	0.96	PG95XA*60080C***
CNPV*6024A**	1.01	0.97	PG95XA*60080C***
CNPV*4812A**	1.00	0.96	PG95XA*60080C***
CSPH*6012A**	1.02	0.96	PG95XA*60080C***
CAP**4821A**	0.99	0.95	PG95XA*60100C***
CAP**6021A**	1.01	0.95	PG95XA*60100C***
CAP**6024A**	1.01	0.97	PG95XA*60100C***
CNPV*4821A**	1.00	0.96	PG95XA*60100C***
CNPV*6024A**	1.01	0.97	PG95XA*60100C***
CNPV*6124A**	1.01	0.97	PG95XA*60100C***
CNPV*4821A**	1.00	0.96	PG95XA*60100C***

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPV*4824A**	0.99	0.96	PG95XA*60100C***
CNPV*6024A**	1.01	0.97	PG95XA*60100C***
CNPV*6124A**	1.02	0.96	PG95XA*60100C***
CNPV*6124A**	1.02	0.96	PG95XA*60100C***
CSPH*4812A**	1.00	0.95	PG95XA*60100C***
CSPH*6012A**	1.01	0.96	PG95XA*60100C***
CAP**4824A**	0.99	0.95	PG95XA*66120D***
CAP**6024A**	1.01	0.97	PG95XA*66120D***
CNPH*6024A**	1.01	0.97	PG95XA*66120D***
CNPH*6124A**	1.01	0.97	PG95XA*66120D***
CNPV*4824A**	1.00	0.96	PG95XA*66120D***
CNPV*6024A**	1.01	0.97	PG95XA*66120D***
CNPV*6124A**	1.02	0.95	PG95XA*66120D***
CSPH*4812A**	0.99	0.96	PG95XA*66120D***
CSPH*6012A**	1.02	0.98	PG95XA*66120D***
CAP**4817A**	0.99	0.99	PG96VA*48080B***
CSPH*4812A**	0.99	0.99	PG96VA*48080B***
CSPH*6012A**	1.00	0.98	PG96VA*48080B***
CAP**4821A**	0.98	0.95	PG96VA*60080C***
CAP**6021A**	1.00	0.96	PG96VA*60080C***
CNPH*4821A**	0.98	0.95	PG96VA*60080C***
CNPV*4821A**	0.98	0.95	PG96VA*60080C***
CSPH*4812A**	0.99	0.95	PG96VA*60080C***
CSPH*6012A**	1.00	0.94	PG96VA*60080C***
CAP**4821A**	0.98	0.95	PG96VA*60100C***
CAP**6021A**	1.00	0.96	PG96VA*60100C***
CNPH*4821A**	0.99	0.95	PG96VA*60100C***
CSPH*4812A**	0.99	0.95	PG96VA*60100C***
CSPH*6012A**	0.99	0.95	PG96VA*60100C***
CAP**4824A**	1.01	0.95	PG96VA*66120D***
CAP**6024A**	1.00	0.96	PG96VA*66120D***
CNPH*6024A**	1.00	0.96	PG96VA*66120D***
CNPH*6124A**	1.00	0.96	PG96VA*66120D***
CNPV*4824A**	0.99	0.96	PG96VA*66120D***
CNPV*6024A**	1.00	0.96	PG96VA*66120D***
CNPV*6124A**	1.01	0.95	PG96VA*66120D***
CSPH*4812A**	0.99	0.95	PG96VA*66120D***

See notes on pg. 19

DETAILED COOLING CAPACITIES# (CONT.)

EVAPORATOR AIR				CONDENSER ENTERING AIR TEMPERATURES °F (°C)											
CFM	EWB °F (°C)	75 (23.9)		85 (29.4)		95 (35)		105 (40.6)		115 (46.1)		Total Sys-tem KW**			
		Capacity MBtu/h†	Total Sys-tem KW**	Capacity MBtu/h†	Total Sys-tem KW**	Capacity MBtu/h†	Total Sys-tem KW**	Capacity MBtu/h†	Total Sys-tem KW**	Capacity MBtu/h†	Total Sys-tem KW**				
PA13NA060(G) – E-B Outdoor Section With CAP**6024A** Indoor Section															
1750	72 (22.2)	67.21	34.03	4.17	64.33	32.99	4.62	61.25	31.88	57.99	30.72	5.69	54.51	29.50	6.30
	67 (19.4)	61.78	42.10	4.12	59.11	41.03	4.58	56.26	39.90	53.27	38.73	5.64	50.10	37.51	6.26
	62 (16.7)	56.85	50.10	4.08	54.44	49.01	4.54	51.89	47.82	49.28	46.54	5.60	46.74	46.74	6.23
	57 (13.9)	55.51	55.51	4.07	53.53	53.53	4.53	51.41	51.41	49.17	49.17	5.04	46.74	46.74	6.23
	72 (22.2)	68.22	35.65	4.27	65.20	33.53	4.73	62.01	33.46	57.90	58.62	32.28	5.79	55.02	31.05
2000	67 (19.4)	62.74	44.73	4.22	59.96	43.64	4.68	57.00	42.50	53.90	41.32	5.74	50.62	40.07	6.36
	62 (16.7)	58.02	53.65	4.18	55.58	52.46	4.64	53.19	53.19	50.79	50.79	5.71	48.19	48.19	6.33
	57 (13.9)	57.57	57.57	4.18	55.46	55.46	4.64	53.20	53.20	50.80	50.80	5.71	48.19	48.19	6.33
	72 (22.2)	68.93	37.17	4.37	65.81	36.09	4.83	62.53	34.96	59.04	33.77	5.89	55.34	32.51	6.50
	67 (19.4)	63.43	47.24	4.32	60.56	46.14	4.78	57.53	44.99	54.34	43.78	5.84	50.99	42.50	6.46
2250	62 (16.7)	59.25	59.25	4.29	57.01	57.01	4.75	54.62	54.62	52.11	52.11	5.82	49.36	49.36	6.44
	57 (13.9)	59.25	59.25	4.29	57.01	57.01	4.75	54.62	54.62	52.12	52.12	5.82	49.36	49.36	6.44

COOLING INDOOR MODEL		POWER	CAPACITY	COOLING INDOOR MODEL	POWER	CAPACITY	COOLING INDOOR MODEL	POWER	CAPACITY
*CAP**6024A**	1.00	1.00	0.99	CNPV*6124A**	0.99	0.99	CNPH**6024A**	0.96	0.99
CAP**6021A**	0.98	0.98	0.98	CSPH*6012A**	0.94	0.94	CNPH**6124A**	0.96	0.99
CNPH*6024A**	1.00	1.00	1.01	CAP**6021A**	1.01	1.01	CNPV*6024A**	0.96	0.99
CNPH*6124A**	1.00	1.00	1.02	CSPH*6012A**	1.00	1.00	CSPH*6124A**	1.00	1.00
CNPV*6024A**	1.00	1.00	0.99	CAP**6024A**	0.99	0.96	CSPH*6012A**	1.00	0.96
CNPV*6124A**	1.00	1.00	0.99	CNPH*6024A**	0.96	0.96	CAP**6021A**	1.00	1.00
CSPH*6012A**	1.00	1.00	1.00	CNPH**6124A**	0.97	0.97	CSPH*6012A**	1.02	1.02
FB4CNF060	0.98	0.98	0.99	CNPV*6024A**	0.96	0.96	CAP**6021A**	1.01	1.01
PF4MNA061	1.00	0.96	1.01	CNPV*6124A**	0.96	0.96	CSPH*6012A**	1.00	0.98
PF4MNB061	1.02	1.02	1.00	CSPH*6012A**	0.97	0.97	CAP**6024A**	0.99	0.97
CAP**6021A**	0.98	0.94	0.99	CAP**6021A**	0.97	0.97	CNPH*6024A**	0.96	0.96
CSPH*6012A**	0.98	0.94	0.99	CSPH*6012A**	0.97	0.97	CNPH*6124A**	0.99	0.99
CAP**6024A**	0.98	0.94	1.01	CAP**6021A**	1.01	1.01	CNPV*6024A**	0.96	0.96
CNPH*6024A**	0.98	0.98	1.00	CSPH*6012A**	0.98	0.98	CNPV*6124A**	0.97	0.97
CNPV*6124A**	0.99	0.99	0.99	CAP**6024A**	0.96	0.96	CSPH*6012A**	0.96	0.96

† Total and sensible capacities are net capacities. Blower motor heat has been subtracted.

‡ Sensible capacities shown are based on 80°F (27°C) entering air at the indoor coil. For sensible capacities at other than 80°F (27°C), deduct 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree below 80°F (27°C), or add 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air per degree above 80°F (27°C).

Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per AHRI standard 210/240–2008. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.

** System kw is total of indoor and outdoor unit kilowatts.

EWB — Entering Wet Bulb

NOTE: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

SYSTEM DESIGN

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. Minimum outdoor operating air temperature without low-ambient operation accessory is 55°F (12.8°C).
3. Maximum outdoor operating air temperature is 125°F (51.7°C).
4. For reliable operation, unit should be level in all horizontal planes.
5. Maximum elevation of indoor coil above or below base of outdoor unit is: indoor coil above = 80 ft (24.38 m), indoor coil below = 200 ft (60.96 m).
6. For interconnecting refrigerant tube lengths greater than 80 ft (24.38 m) horizontal or 35 ft (10.7 m) vertical differential, consult Residential Piping and Long-Line Guideline available from equipment distributor.
7. Crankcase heater required when the application qualifies as long-line.
8. If any refrigerant tubing is buried, provide a minimum 6 in (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in (914.4 mm) may be buried without further consideration.
9. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.