

Ducted Heat Pump Ductless System

Indoor Model: 40MBQB12D--3



Submittal Data

Job Data:		Location:	
Buyer:		Buyer P.O. #:	
Carrier #:			
Unit Number:		Model Number:	
Performance Data Certified By:		Date:	



Performance
SERIES

STANDARD FEATURES

- Built-in condensate pump
- Modes: Cool, Heat, Dry, Fan, Auto
- Timer
- One touch memory
- Follow me
- 46°F Heating Mode (Heating Setback)

CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (standard)

System	Size	12	
	Indoor Model	40MBQB12D--3	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.51
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Standard	
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	1/2 (12.7)

Indoor Coil	Face Area	Sq. Ft.	1.40
	No. Rows		3
	Fins per inch		16
	Circuits		4
Indoor	Unit Width	in (mm)	27.56 (700)
	Unit Height	in (mm)	8.27 (210)
	Unit Depth	in (mm)	25 (635)
	Net Weight	lbs (kg)	39.90 (18.1)
	Number of Fan Speeds		3
	Airflow (lowest to highest)	CFM	290/340/380
	Sound Pressure (lowest to highest)	dB(A)	30/34/38
	Max Static Pressure	In.WG.	0.18

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

Accessories


53DS-900---008	Insulated 25' Line Set - 1/4" x 1/2"
----------------	--------------------------------------

Compatibility Table

Indoor Unit	40MBQB12D--3
Outdoor Unit	38MAQB12R--3
	38MAQB12---3
	38MGQC18---3
	38MGQD27---3
	38MGQF36---3
	38MGQF48---3

Construction View

Indoor Model: 40MBQB12D--3

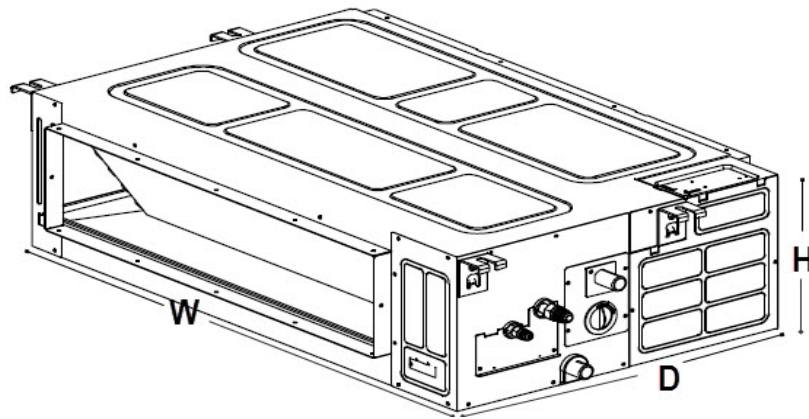

Unit Width	in (mm)	27.56 (700)
Unit Height	in (mm)	8.27 (210)
Unit Depth	in (mm)	25 (635)
Net Weight	lbs (kg)	39.90 (18.1)

