

24ACB3
Comfort™ 13 Series Air Conditioner
with Puron® Refrigerant
1 – 1/2 To 5 Nominal Tons (Size 18 To 60)



Turn to the Experts.™

Product Data



Comfort
SERIES

Carrier's Air Conditioners with Puron® refrigerant provide a collection of features unmatched by any other family of equipment. The 24ACB has been designed utilizing Carrier's Puron refrigerant. The environmentally sound refrigerant allows you to make a responsible decision in the protection of the earth's ozone layer.

As an Energy Star® Partner, Carrier Corporation has determined that this product meets the Energy Star® guidelines for energy efficiency. Refer to the combination ratings in the Product Data for system combinations that meet Energy Star® guidelines.

NOTE: Ratings contained in this document are subject to change at any time. Always refer to the AHRI directory (www.ahridirectory.org) for the most up-to-date ratings information.

INDUSTRY LEADING FEATURES / BENEFITS

EFFICIENCY

- 13 - 15 SEER/11 - 12 EER
- Microtube Technology™ refrigeration system
- Indoor air quality accessories available

SOUND

- Sound level as low as 74 dBA

COMFORT

- System supports Thermidistat™ Control or standard thermostat

RELIABILITY

- Puron® refrigerant - environmentally sound, won't deplete the ozone layer and low lifetime service cost.
- Front-seating service valves
- Scroll compressor
- Internal pressure-relief valve
- Internal thermal overload
- Low-pressure switch
- High-pressure switch
- Filter drier
- Balanced refrigeration system for maximum reliability

DURABILITY

WeatherArmor™ protection package:

- Solid, durable sheet metal construction
- Steel louver coil guard
- Baked-on, complete outer coverage, powder paint

APPLICATIONS

- Long-line - up to 250 feet (76.20 m) total equivalent length, up to 200 feet (60.96 m) condenser above evaporator, or up to 80 ft. (24.38 m) evaporator above condenser (See Longline Guide for more information.)
- Low ambient (down to -20°F/-28.9°C) with accessory kit

WARRANTY

Single Phase

- 10-year limited compressor warranty
- 5-year limited parts warranty

3-Phase

- 5-year limited compressor warranty
- 1-year limited parts warranty

MODEL NUMBER NOMENCLATURE

1	2	3	4	5	6	7	8	9	10	11	12	13
N	N	A	A	A/N	N	N	N	A/N	A/N	A/N	N	N
2	4	A	C	B	3	3	6	A	0	0	3	1
Product Series	Product Family	Tier	Major Series	SEER	Cooling Capacity	Variations	Open	Open	Open	Voltage	Minor Series	
24 = AC	A = RES AC	C = Comfort	B = Puron	3 = 13 SEER		A = Standard	0 = Not Defined	0 = Not Defined		3 = 208/230-1 5 = 208/230-3 6 = 460-3	0, 1, 2...	



This product has been designed and manufactured to meet Energy Star® criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow all instructions. **Failure to confirm proper charge and air flow may reduce energy efficiency and shorten equipment life.**

STANDARD FEATURES

Feature	18	24	30	36	42	48	60
Puron Refrigerant	X	X	X	X	X	X	X
Up to 14.0 SEER / 11.5 EER	X	X	X	X	X	X	
Scroll Compressor	X	X	X	X	X	X	X
Louvered Coil Guard	X	X	X	X	X	X	X
Field – Installed Filter Drier	X	X	X	X	X	X	X
Front – Seating Service Valves	X	X	X	X	X	X	X
Internal Pressure – Relief Valve	X	X	X	X	X	X	X
Internal Thermal Overload	X	X	X	X	X	X	X
Long Line capability	X	X	X	X	X	X	X
Low Ambient capability with Kit	X	X	X	X	X	X	X
Low – Pressure Switch	X	X	X	X	X	X	X
High – Pressure Switch	X	X	X	X	X	X	X
Compressor Sound Blanket	X	X	X	X	X	X	X

X = Standard

PHYSICAL DATA

UNIT SIZE SERIES	18-30	24-30	30-30,50	36-30,50,60	42-30,50,60	48-30,50,60	60-30,50,60
Operating Weight lb (kg)	135 (61.2)	135 (61.2)	149 (67.6)	166 (75.3)	210 (95.3)	236 (107.0)	261 (118.4)
Shipping Weight lb (kg)	156 (70.8)	156 (70.8)	171 (77.6)	189 (85.7)	238 (108.0)	264 (119.7)	295 (133.8)
Compressor Type	Scroll						
REFRIGERANT	Puron® (R-410A)						
Control	TXV (Puron® Hard Shutoff)						
Charge lb (kg)	3.57 (1.62)	3.72 (1.69)	4.50 (2.04)	5.05 (2.29)	5.84 (2.65)	8.00 (3.63)	8.44 (3.83)
COND FAN	Propeller Type, Direct Drive						
Air Discharge	Vertical						
Air Qty (CFM)	1880	2200	2200	2950	3170	3365	4050
Motor HP	1/12	1/10	1/10	1/4	1/5	1/4	1/4
Motor RPM	1100	1100	1100	1100	825	825	825
COND COIL							
Face Area (Sq. ft.)	9.85	9.85	11.49	14.77	17.25	21.56	25.15
Fins per In.	20	20	25	25	25	25	25
Rows	1	1	1	1	1	1	1
Circuits	3	3	3	3	4	5	5
VALVE CONNECT. (In. ID)							
Vapor	5/8	5/8	3/4	3/4	7/8	7/8	7/8
Liquid	3/8						
REFRIGERANT TUBES (In. OD)							
Rated Vapor*	5/8	5/8	3/4	3/4	7/8	7/8	1-1/8
Liquid	3/8						

*Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

Note: See unit Installation Instruction for proper installation.

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

LONG LINE APPLICATION: An application is considered "Long line" when the total equivalent tubing length exceeds 80 ft. (24.38 m) or when there is more than 20 ft. (6.09 m) vertical separation between indoor and outdoor units. These applications require additional accessories and system modifications for reliable system operation. The maximum allowable total equivalent length is up to 250 ft. (76.2 m). The maximum vertical separation is 200 ft.

(60.96 m) when outdoor unit is above indoor unit, and up to 80 ft. (24.38 m) when the outdoor unit is below the indoor unit. Refer to Accessory Usage Guideline below for required accessories. See Longline Application Guideline for required piping and system modifications. Also, refer to the table below for the vapor tube diameters based on the total length to minimize the cooling capacity loss.

Unit Nominal Size (Btuh)	Maximum Liquid Line Diameters (In. OD)	Vapor Line Diameters (In. OD)	Cooling Capacity Loss (%) Total Equivalent Line Length ft. (m)								
			Standard Application		Long Line Application Requires Accessories						
			26-50 (7.9-15.2)	51-80 (15.5-24.4)	81-100 (24.7-30.5)	101-125 (30.8-38.1)	126-150 (38.4-45.7)	151-175 (46.0-53.3)	176-200 (53.6-61.0)	201-225 (61.3-68.6)	226-250 (68.9-76.2)
18000 1 Stage Puron AC	3/8	1/2	1	2	3	4	6	7	8	9	10
		5/8	0	0	1	1	1	2	2	3	3
24000 1 Stage Puron AC	3/8	5/8	0	1	1	2	3	3	4	4	5
		3/4	0	0	0	0	1	1	1	1	1
		7/8	0	0	0	0	0	0	0	0	0
30000 1 Stage Puron AC	3/8	5/8	1	2	3	3	4	5	6	7	8
		3/4	0	0	1	1	1	2	2	2	3
		7/8	0	0	0	0	1	1	1	1	1
36000 1 Stage Puron AC	3/8	5/8	1	2	4	5	6	7	9	10	11
		3/4	0	0	1	1	2	2	3	3	4
		7/8	0	0	0	0	1	1	1	1	2
42000 1 Stage Puron AC	3/8	3/4	0	1	2	2	3	4	4	5	6
		7/8	0	0	1	1	1	2	2	2	3
		1 1/8	0	0	0	0	0	0	0	0	0
48000 1 Stage Puron AC	3/8	3/4	0	1	2	3	4	5	5	6	7
		7/8	0	0	1	1	2	2	2	3	3
		1 1/8	0	0	0	0	0	0	0	1	1
60000 1 Stage Puron AC	3/8	3/4	1	2	4	5	6	7	9	10	11
		7/8	0	1	2	2	3	4	4	5	5
		1 1/8	0	0	0	1	1	1	1	1	1

Applications in this area are long line. Accessories are required as shown recommended on Long Line Application Guidelines

Applications in this area may have height restrictions that limit allowable total equivalent length, when outdoor unit is below indoor unit. See Long Line Application Guidelines

ACCESSORIES

ORDER NUMBER	DESCRIPTION	18-30	24-30	30-30	30-50	36-30	36-50	36-60	42-30	42-50	42-60	48-30	48-50	48-60	60-30	60-50	60-60
KAACH1201AAA	CRANKCASE HTR								X	X		X	X		X	X	
KAACH1301AAA	CRANKCASE HTR										X			X			X
KAACH1401AAA	CRANKCASE HTR	X	X	X	X	X	X										
KAACH1501AAA	CRANKCASE HTR							X									
KSACY0101AAA	CYCLE PROTECTOR	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
KAAFT0101AAA	FREEZE THERMOSTAT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
KSAHS1701AAA	HARD START (CAP / RELAY)	X	X	X		X			X			X			X		
KSALA0301410	LOW AMBIENT PSW	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
HC32GE234	MOTOR FAN BALL BEARING 230V	X															
HC34GE239	MOTOR FAN BALL BEARING 230V		X	X	X												
HC40GE226	MOTOR FAN BALL BEARING 230V					X	X										
HC40GE466	MOTOR FAN BALL BEARING 460V							X									
HC38GE228	MOTOR FAN BALL BEARING 230V								X	X							
HC38GE462	MOTOR FAN BALL BEARING 460V										X						
HC40GE228	MOTOR FAN BALL BEARING 230V											X	X		X	X	
HC40GE467	MOTOR FAN BALL BEARING 460V													X			X
KSALA0601AAA	MOTORMASTER 230V	X	X	X	X	X	X		X	X		X	X		X	X	
KSALA0701AAA	MOTORMASTER 460V							X			X			X			X
KAALS0201LLS	SOLENOID VALVE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
KAACS0201PTC	START ASSIST PTC	X	X	X		X			X			X			X		
KSASF0101AAA	SUPPORT FEET	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
KAATD0101TDR	TIME DELAY RELAY	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
KSATX0201PUR	TXV PURON HSO	X	X	X	X												
KSATX0301PUR	TXV PURON HSO					X	X	X	X	X	X						
KSATX0401PUR	TXV PURON HSO											X	X	X			
KSATX0501PUR	TXV PURON HSO														X	X	X
KAAWS0101AAA	WINTER START	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

x = Accessory

ACCESSORY THERMOSTATS

THERMOSTAT / SUBBASE PKG.	DESCRIPTION
TP-PRH-01	Programmable Thermidistat
TP-NRH-01	Non-programmable Thermidistat
TC-PAC-01	Comfort Series Programmable AC Stat
TC-NAC-01	Comfort Series Non-programmable AC Stat
TSTATCCPRH01-B	Thermidistat Control – Programmable / Non-Programmable Thermostat with Humidity control
TSTATCCPAC01-B	Thermostat – Auto Changeover, 7-Day Programmable, °F/°C, 1-Stage Heat, 1-Stage Cool
TSTATCCNAC01-C	Thermostat – Auto Changeover, Non-Programmable, °F/°C, 1-Stage Heat, 1-Stage Cool
TSTATCCBAC01-B	Builder's Thermostat – Manual Changeover, Non-Programmable, °F/°C, 1-Stage Heat, 1-Stage Cool
TSTATCCSEN01-B	Outdoor Air Temperature Sensor
TSTATXXBBP01	Backplate for Builder's Thermostat
TSTATXXNBP01	Backplate for Non-Programmable Thermostat
TSTATXXBP01	Backplate for Programmable Thermostat
TSTATXXCNV10	Thermostat Conversion Kit (4 to 5 wires) – 10 Pack

ACCESSORY USAGE GUIDELINE

ACCESSORY	REQUIRED FOR LOW-AMBI- ENT COOLING APPLICATIONS (Below 55°F/12.8°C)	REQUIRED FOR LONG LINE APPLICATIONS* (Over 80 ft./24.38 m)	REQUIRED FOR SEA COAST APPLICATIONS (Within 2 miles/3.22 km)
Ball Bearing Fan Motor	Yes†	No	No
Compressor Start Assist Capacitor and Relay	Yes	Yes	No
Crankcase Heater	Yes	Yes	No
Evaporator Freeze Thermostat	Yes	No	No
Hard Shut-Off TXV	Yes	Yes	Yes
Liquid Line Solenoid Valve	No	No	No
Motor Master® Control or Low-ambient Pressure Switch	Yes	No	No
Support Feet	Recommended	No	Recommended
Winter Start Control	Yes	No	No

* For tubing line sets between 80 and 200 ft. (24.38 and 60.96 m) and/or 20 ft. (6.09 m) vertical differential, refer to Residential Split-System Longline Application Guideline.

† Required for Low-Ambient Controller (full modulation feature) MotorMaster® Control.

ACCESSORY DESCRIPTION AND USAGE (LISTED ALPHABETICALLY)

1. Ball-Bearing Fan Motor

A fan motor with ball bearings which permits speed reduction while maintaining bearing lubrication.

Usage Guideline:

Required on all units when using MotorMaster®

2. Compressor Start Assist - Capacitor and Relay

Start capacitor and relay gives a "hard" boost to compressor motor at each start up.

Usage Guideline:

Required for single-phase scroll compressors in the following applications:

Long line

Low-ambient cooling

Suggested for all compressors in areas with a history of low voltage problems.

3. Compressor Start Assist — PTC Type

Solid state electrical device which gives a "soft" boost to the compressor at each start-up.

Usage Guideline:

Suggested in installations with marginal power supply.

4. Crankcase Heater

An electric resistance heater which mounts to the base of the compressor to keep the lubricant warm during off cycles. Improves compressor lubrication on restart and minimizes the chance of liquid slugging.

Usage Guideline:

Required in Low-ambient cooling applications.

Required in long line applications.

Suggested in all commercial applications.

5. Cycle Protector

The cycle protector is designed to prevent compressor short cycling. This control provides an approximate 5-minute delay after power to the compressor has been interrupted for any reason, including power outage, protector control trip, thermostat jiggling, or normal cycling.

6. Evaporator Freeze Thermostat

An SPST temperature-actuated switch that stops unit operation when evaporator reaches freeze-up conditions.

Usage Guideline:

Required when Low-ambient kit has been added.

7. Low-Ambient Pressure Switch Kit

A long life pressure switch which is mounted to outdoor unit service valve. It is designed to cycle the outdoor fan motor in order to maintain head pressure within normal operating limits. The control will maintain working head pressure at low-ambient temperatures down to 0°F (-17.8°C) when properly installed.

Usage Guideline:

A Low-Ambient Pressure Switch must be used when cooling operation is at outdoor temperatures below 55°F (12.8°C) to a minimum of 0°F (-17.8°C).

Suggested for all commercial applications.

8. MotorMaster® Low-Ambient Controller

A fan-speed control device activated by a temperature sensor, designed to control condenser fan motor speed in response to the saturated, condensing temperature during operation in cooling mode only. For outdoor temperatures down to -20°F (-28.9°C), it maintains condensing temperature at 100°F ±10°F (37.8°C ± 6.5°C).

Usage Guideline:

A MotorMaster® Low Ambient Controller or Low-Ambient Pressure Switch must be used when cooling operation is used at outdoor temperatures below 55°F (12.8°C).

Suggested for all commercial applications.

ACCESSORY DESCRIPTION AND USAGE (LISTED ALPHABETICALLY) (CONT)

9. Outdoor Air Temperature Sensor

Designed for use with Carrier Thermostats listed in this publication. This device enables the thermostat to display the outdoor temperature. This device also

is required to enable special thermostat features such as auxiliary heat lock out.

Usage Guideline:

Suggested for all Carrier thermostats listed in this publication.

10. Support Feet

Four stick-on plastic feet that raise the unit 4 in. (101.6 mm) above the mounting pad. This allows sand, dirt, and other debris to be flushed from the unit base, minimizing corrosion.

Usage Guideline:

Suggested in the following applications:

Coastal installations.

Windy areas or where debris is normally circulating.

Rooftop installations.

For improved sound ratings.

11. Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Kit includes valve, adapter tubes, and external equalizer tube. Hard shutoff types are available.

NOTE: When using a hard shutoff TXV with single phase reciprocating compressors, a Compressor Start Assist Capacitor and Relay is required.

Usage Guideline:

Accessory required to meet ARI rating and system reliability, where indoor not equipped.

Hard shutoff TXV or LLS required in air conditioner long line applications.

Required for use on all zoning systems.

12. Time-Delay Relay

An SPST delay relay which briefly continues operation of indoor blower motor to provide additional cooling after the compressor cycles off.

NOTE: Most indoor unit controls include this feature. For those that do not, use the guideline below.

Usage Guideline:

Accessory required to meet ARI rating, where indoor not equipped.

13. Winter Start Control

This control is designed to alleviate nuisance opening of the low-pressure switch by bypassing it for the first 3 minutes of operation.

ELECTRICAL DATA

UNIT SIZE – VOLTAGE, SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MIN WIRE SIZE†	MIN WIRE SIZE†	MAX LENGTH ft (m)‡	MAX LENGTH ft (m)‡	MAX FUSE** or CKT BRK AMPS
		MAX	MIN.	LRA	RLA			60° C	75° C	60° C	75° C	
18–30	208–230–1	253	197	48.0	9.0	0.5	11.8	14	14	67 (20.4)	64 (19.5)	15
24–30				58.3	13.5	0.75	17.6	14	14	45 (13.7)	43 (13.1)	25
30–30				64.0	12.8	0.75	16.8	14	14	47 (14.3)	45 (13.7)	25
36–30				77.0	14.1	1.4	19.0	12	12	66 (20.1)	63 (19.2)	30
42–30				112.0	17.9	1.2	23.6	12	12	53 (16.2)	51 (15.5)	40
48–30				109.0	19.9	1.2	26.2	10	10	76 (23.2)	73 (22.3)	40
60–30				134.0	26.4	1.2	34.2	8	8	91 (27.7)	86 (26.2)	50
30–50	208/230–3	253	197	58.0	10.1	0.75	13.4	14	14	68 (20.7)	65 (19.8)	20
36–50				71.0	9.2	1.4	12.9	14	14	70 (21.3)	67 (20.4)	20
42–50				88.0	13.5	1.2	18.1	12	12	80 (24.4)	76 (23.2)	30
48–50				83.1	13.6	1.2	18.2	12	12	79 (24.1)	76 (23.2)	30
60–50				110.0	17.7	1.2	23.3	12	12	62 (18.9)	59 (18.0)	40
36–60	460–3	506	414	38.0	5.6	0.7	7.8	14	14	233 (71.0)	222 (67.7)	15
42–60				44.0	6.0	0.53	8.0	14	14	227 (69.2)	216 (65.8)	15
48–60				41.0	6.1	0.6	8.2	14	14	222 (67.7)	211 (64.3)	15
60–60				52.0	7.8	0.6	10.3	14	14	177 (54.0)	168 (51.2)	15

* Permissible limits of the voltage range at which the unit will operate satisfactorily

† If wire is applied at ambient greater than 30° C (86° F), consult table 310–16 of the NEC (ANSI/NFPA 70). The ampacity of non-metallic-sheathed cable (NM), trade name ROMEX, shall be that of 60° C (140° F) conditions, per the NEC (ANSI/NFPA 70) Article 336–26. If other than uncoated (no-plated), 60° or 75° C (140° or 167° C) insulation, copper wire (solid wire for 10 AWG or smaller, stranded wire for larger than 10 AWG) is used, consult applicable tables of the NEC (ANSI/NFPA 70).

‡ Length shown is as measured 1 way along wire path between unit and service panel for voltage drop not to exceed 2%.

** Time–Delay fuse.

FLA – Full Load Amps

LRA – Locked Rotor Amps

MCA – Minimum Circuit Amps

RLA – Rated Load Amps

NOTE: Control circuit is 24–V on all units and requires external power source. Copper wire must be used from service disconnect to unit. All motors/compressors contain internal overload protection.

Complies with 2001 requirements of ASHRAE Standards 90.1

24ACB3

A-WEIGHTED SOUND POWER (dBA)

UNIT SIZE – VOLTAGE, SERIES	STANDARD RATING (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA, without tone adjustment)						
		125	250	500	1000	2000	4000	8000
18–30	74	50.0	61.5	64.5	66.5	64.0	61.0	54.5
24–30	75	55.5	63.5	67.0	70.0	66.0	63.5	57.0
30–30, 50	74	52.5	63.0	68.5	70.0	66.5	62.5	56.5
36–30, 50, 60	75	57.0	65.0	67.5	69.5	67.5	65.0	60.0
42–30, 50, 60	74	55.0	64.0	68.0	68.5	64.5	60.0	54.0
48–30, 50, 60	74	52.5	62.5	65.5	69.0	63.5	60.5	56.0
60–30, 50, 60	74	54.0	59.0	65.5	67.5	63.5	60.0	55.5

NOTE: Tested in accordance with ARI Standard 270–95 (not listed in ARI).

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE – VOLTAGE, SERIES	REQUIRED SUBCOOLING °F (°C)
18–30	8 (4.4)
24–30	13 (7.2)
30–30, 50	16 (8.9)
36–30, 50, 60	16 (8.9)
42–30, 50, 60	10 (5.6)
48–30, 50, 60	17 (9.4)
60–30, 50, 60	11 (6.1)

DIMENSIONS - ENGLISH

24ACB3



UNIT	SERIES	ELECTRICAL CHARACTERISTICS		A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (lbs)	SHIPPING DIMENSIONS (L x W x H)
24ACB318	0	X	0	0	25 3/4"	25"	3 3/4"	5/8"	4 7/16"	21 1/4"	9 1/8"	2 13/16"	1 1/2"	12 1/2"	12 3/8"	135	26 7/8" X 30 1/16" X 32 9/16"
24ACB324	0	X	0	0	25 3/4"	25"	3 3/4"	5/8"	4 7/16"	21 1/4"	9 1/8"	2 13/16"	1 1/2"	13"	12 3/8"	135	26 7/8" X 30 1/16" X 32 9/16"
24ACB330	0	X	0	X	25 3/4"	28 7/16"	3 3/4"	3/4"	4 7/16"	21 1/4"	9 1/8"	2 13/16"	1 1/2"	12 1/4"	13 3/4"	149	26 7/8" X 30 1/16" X 32 9/16"
24ACB336	0	X	0	X	25 3/4"	35 1/4"	3 3/4"	3/4"	4 7/16"	21 1/4"	9 1/8"	2 13/16"	1 1/2"	12"	13"	166	26 7/8" X 30 1/16" X 39 3/8"
24ACB342	0	X	0	X	31 3/16"	32 5/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	15 3/4"	16 1/4"	210	32 3/8" X 35 1/2" X 35 15/16"
24ACB348	0	0	0	X	31 3/16"	39 1/8"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/4"	17 1/4"	236	32 3/8" X 35 1/2" X 42 3/4"
24ACB360	0	X	0	X	35"	39 1/8"	3 7/8"	7/8"	6 9/16"	28 7/16"	9 1/8"	2 15/16"	5/8"	19 3/4"	18 3/8"	261	36 1/8" X 39 5/16" X 42 3/4"

208-230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

X = YES
0 = NO

NOTES:

1. ALLOW 30" CLEARANCE TO SERVICE SIDE OF UNIT.
48" ABOVE UNIT, 6" ON ONE SIDE, 12" ON REMAINING SIDE,
AND 24" BETWEEN UNITS FOR PROPER AIRFLOW.
2. MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING
MODE IS 55°F, MAX. 125°F.
3. SERIES DESIGNATION IS THE 13TH POSITION OF THE
UNIT MODEL NUMBER.
4. CENTER OF GRAVITY 
5. ALL DIMENSIONS ARE IN "INCHES" UNLESS NOTED.

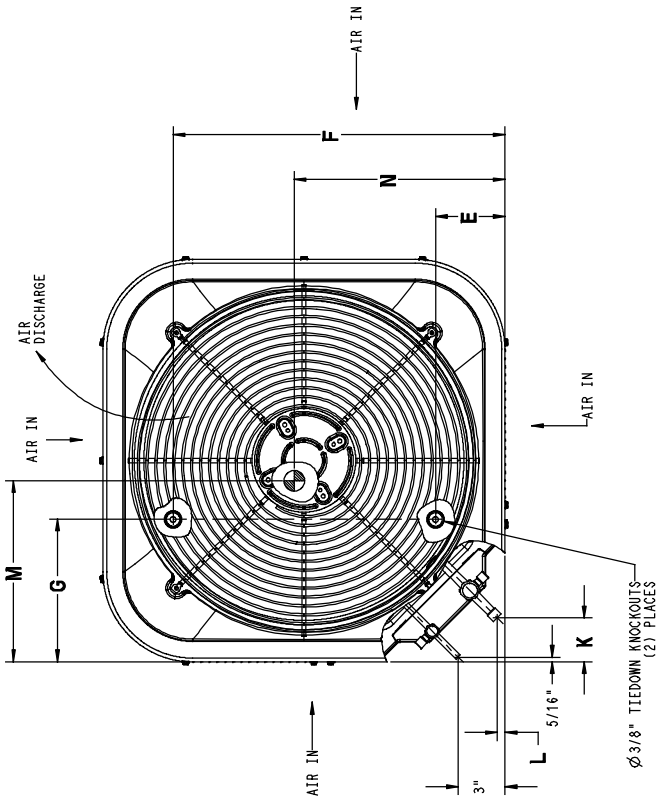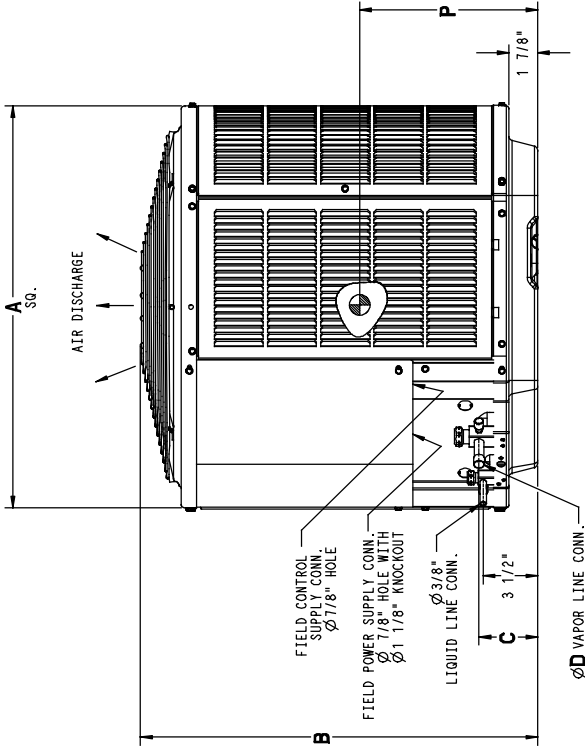

UNIT SIZE	MINIMUM MOUNTING PAD DIMENSIONS
18, 24, 30, 36	26" X 26"
42, 48	31 1/2" X 31 1/2"
60	35" X 35"

DIMENSIONS - SI



UNIT	SERIES	ELECTRICAL CHARACTERISTICS		A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (Kgs)	SHIPPING WEIGHT (Kgs)	SHIPPING DIMENSIONS (L x W x H)
24ACB318	0	X	0	0	654.0	635.0	95.2	15.9	112.7	539.8	231.8	71.4	12.7	317.5	314.3	61.2	70.8	682.6 X 763.6 X 827.1
24ACB324	0	X	0	0	654.0	635.0	95.2	15.9	112.7	539.8	231.8	71.4	12.7	330.2	301.6	61.2	70.8	682.6 X 763.6 X 827.1
24ACB330	0	X	0	X	654.0	722.3	95.2	19.0	112.7	539.8	231.8	71.4	12.7	311.2	349.2	67.6	77.6	682.6 X 763.6 X 827.1
24ACB336	0	X	0	X	654.0	895.4	95.2	19.0	112.7	539.8	231.8	71.4	12.7	304.8	330.2	75.3	85.7	682.6 X 763.6 X 1000.1
24ACB342	0	X	0	X	792.2	820.8	98.4	22.2	166.7	627.1	231.8	74.6	15.9	400.0	412.8	95.2	108.0	822.3 X 901.7 X 912.8
24ACB348	0	X	0	X	792.2	993.8	98.4	22.2	166.7	627.1	231.8	74.6	15.9	382.0	438.2	107.0	119.7	822.3 X 901.7 X 1085.8
24ACB360	0	X	0	X	889.0	993.8	98.4	22.2	166.7	722.3	231.8	74.6	15.9	523.9	501.6	118.4	133.8	917.6 X 998.6 X 1085.8

X = YES
0 = NO

208-230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------


NOTES:

1. ALLOW 762.0 CLEARANCE TO SERVICE SIDE OF UNIT, 1219.2 ABOVE UNIT, 132.4 ON ONE SIDE, 304.8 ON REMAINING SIDE, AND 609.6 BETWEEN UNITS FOR PROPER AIRFLOW.
2. MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING MODE IS 13°C, MAX. 52°C.
3. SERIES DESIGNATION IS THE 13TH POSITION OF THE UNIT MODEL NUMBER.
4. CENTER OF GRAVITY .
5. ALL DIMENSIONS ARE IN "MM" UNLESS NOTED.

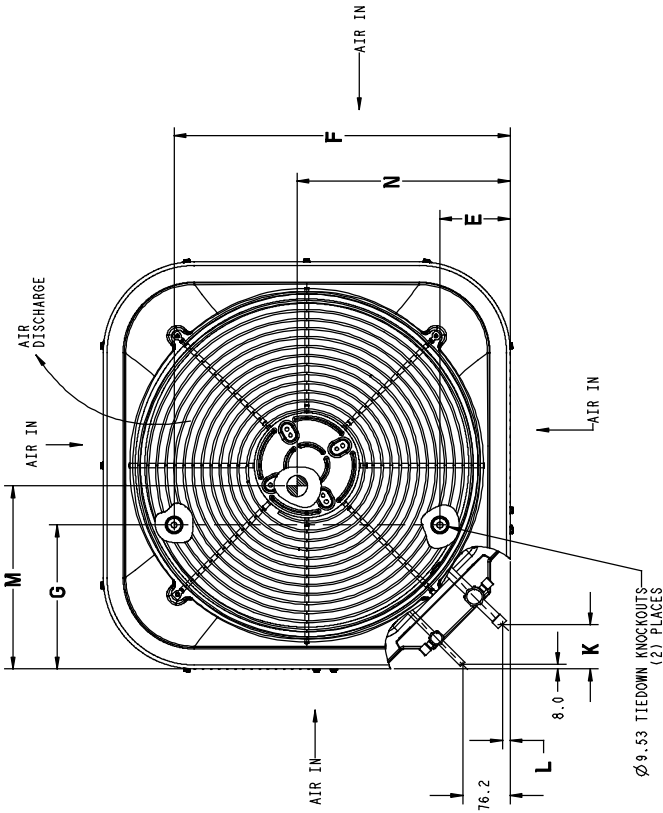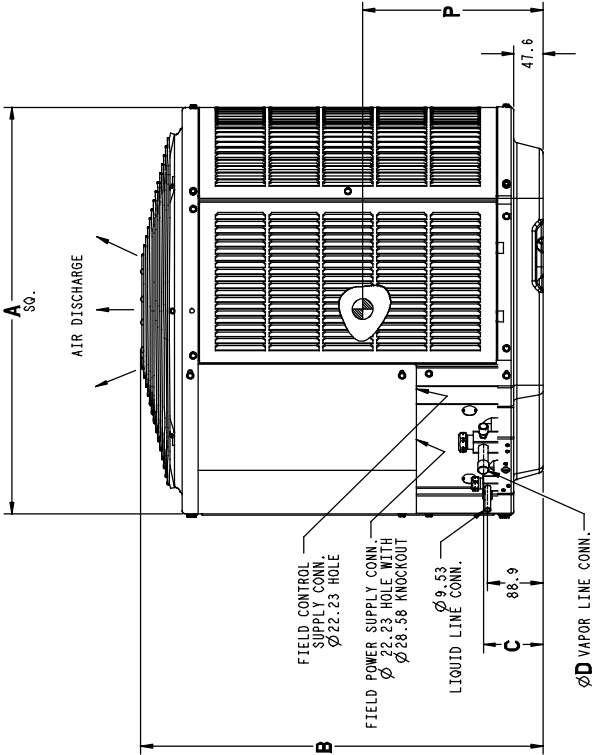

UNIT SIZE	MINIMUM MOUNTING PAD DIMENSIONS
18, 24, 30, 36	660.4 X 660.4
42, 48	800.1 X 800.1
60	889.0 X 889.0

CLEARANCES

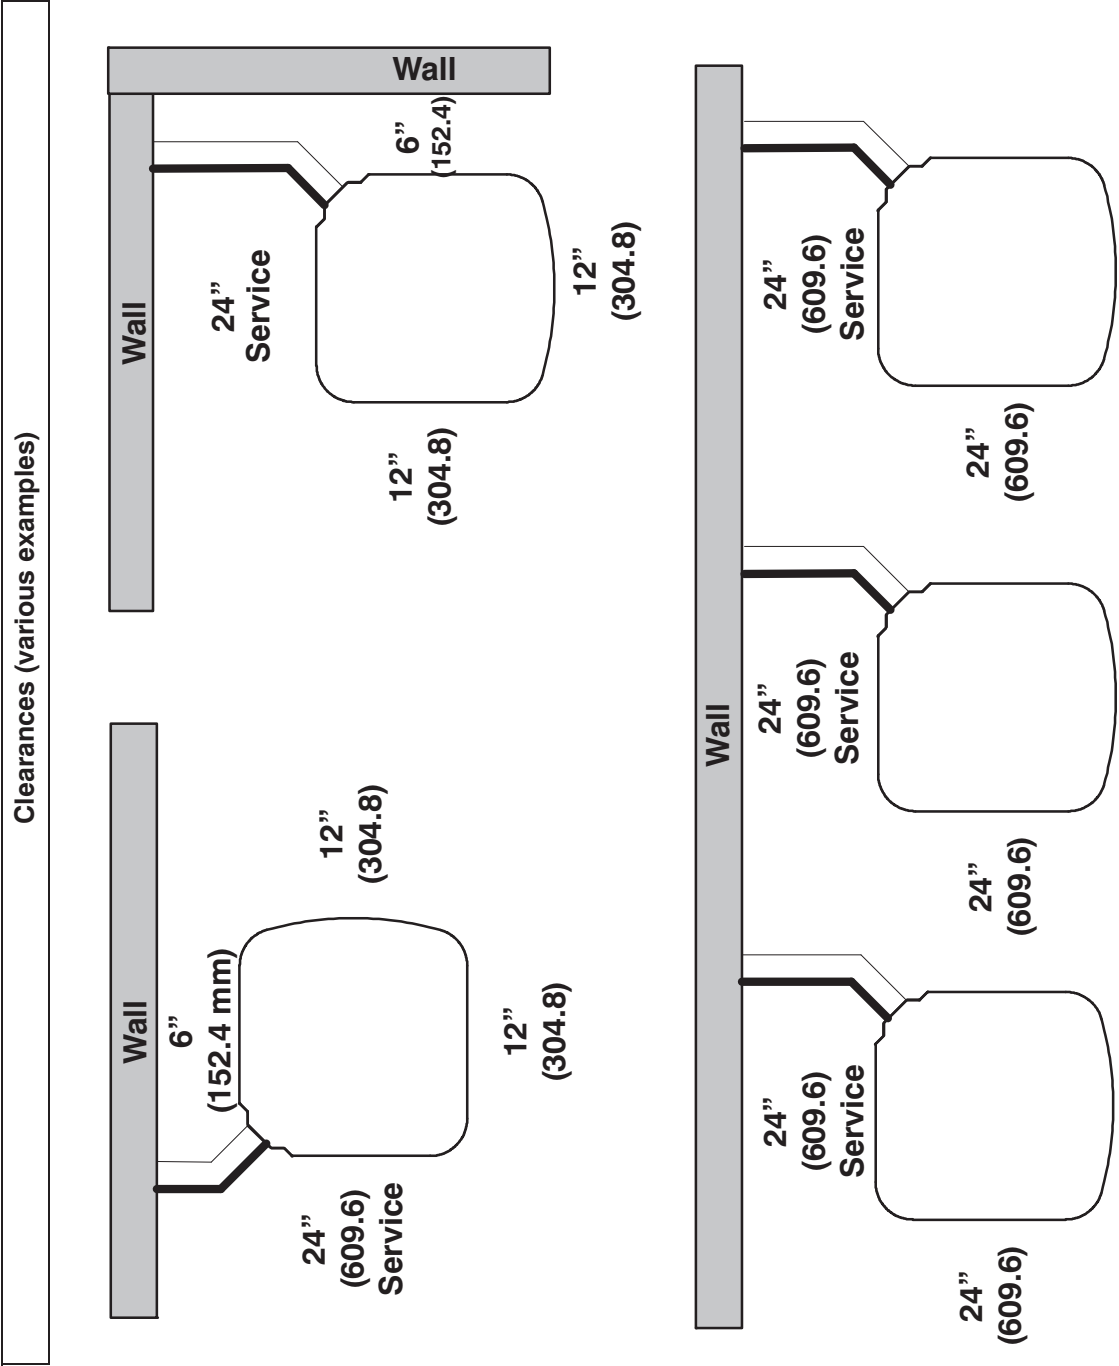

Note: Numbers in () = mm

COMBINATION RATINGS

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045177	24ACB318A30	*CAP**1814A**+TDR		17500	11.00	13.00	1
3045184	24ACB318A30	CAP**1814A**	58CV(A,X)070-12	17200	11.70	14.50	1
3045178	24ACB318A30	CAP**1814A**	58PH*045-08	17500	12.20	14.50	1
3045186	24ACB318A30	CAP**2414A**	58CV(A,X)070-12	17500	11.70	14.50	1
3045179	24ACB318A30	CAP**2414A**	58PH*045-08	17800	12.20	14.50	1
3045185	24ACB318A30	CAP**2414A**+TDR		17700	11.00	13.00	1
3045189	24ACB318A30	CAP**2417A**	58CV(A,X)090-16	17600	11.70	14.50	1
3101466	24ACB318A30	CAP**2417A**	58MEB040-12	18000	12.50	15.00	1
3101467	24ACB318A30	CAP**2417A**	58MEB060-12	17900	12.50	15.00	1
3045188	24ACB318A30	CAP**2417A**	58MV(B,C)060-14	17500	11.70	14.50	1
3045187	24ACB318A30	CAP**2417A**+TDR		17700	11.00	13.00	1
3045203	24ACB318A30	CNPF*2418A**+TDR		17500	11.00	13.00	1
3045201	24ACB318A30	CNPH*2417A**	58CV(A,X)070-12	17300	11.70	14.50	1
3045202	24ACB318A30	CNPH*2417A**	58CV(A,X)090-16	17400	11.70	14.50	1
3101470	24ACB318A30	CNPH*2417A**	58MEB040-12	17900	12.50	15.00	1
3101471	24ACB318A30	CNPH*2417A**	58MEB060-12	17700	12.50	15.00	1
3045198	24ACB318A30	CNPH*2417A**	58MV(B,C)040-14	17300	11.70	14.50	1
3045199	24ACB318A30	CNPH*2417A**	58MV(B,C)060-14	17300	11.70	14.50	1
3045200	24ACB318A30	CNPH*2417A**	58MV(B,C)080-14	17400	11.70	14.50	1
3045182	24ACB318A30	CNPH*2417A**	58PH*045-08	17800	12.20	14.50	1
3045197	24ACB318A30	CNPH*2417A**+TDR		17500	11.00	13.00	1
3045191	24ACB318A30	CNPV*1814A**	58CV(A,X)070-12	17200	11.70	14.50	1
3045180	24ACB318A30	CNPV*1814A**	58PH*045-08	17500	12.20	14.50	1
3045190	24ACB318A30	CNPV*1814A**+TDR		17400	11.00	13.00	1
3045193	24ACB318A30	CNPV*2414A**	58CV(A,X)070-12	17300	11.70	14.50	1
3045181	24ACB318A30	CNPV*2414A**	58PH*045-08	17800	12.20	14.50	1
3045192	24ACB318A30	CNPV*2414A**+TDR		17500	11.00	13.00	1
3045196	24ACB318A30	CNPV*2417A**	58CV(A,X)090-16	17400	11.70	14.50	1
3101468	24ACB318A30	CNPV*2417A**	58MEB040-12	17900	12.50	15.00	1
3101469	24ACB318A30	CNPV*2417A**	58MEB060-12	17700	12.50	15.00	1
3045195	24ACB318A30	CNPV*2417A**	58MV(B,C)060-14	17300	11.70	14.50	1
3045194	24ACB318A30	CNPV*2417A**+TDR		17500	11.00	13.00	1
3045208	24ACB318A30	CSPH*2412A**	58CV(A,X)070-12	16600	11.70	14.50	1
3045209	24ACB318A30	CSPH*2412A**	58CV(A,X)090-16	16700	11.70	14.50	1
3101472	24ACB318A30	CSPH*2412A**	58MEB040-12	18000	12.50	15.00	1
3101473	24ACB318A30	CSPH*2412A**	58MEB060-12	17700	12.20	14.50	1
3045205	24ACB318A30	CSPH*2412A**	58MV(B,C)040-14	16700	11.70	14.50	1
3045206	24ACB318A30	CSPH*2412A**	58MV(B,C)060-14	16700	11.70	14.50	1
3045207	24ACB318A30	CSPH*2412A**	58MV(B,C)080-14	16700	11.70	14.50	1
3045183	24ACB318A30	CSPH*2412A**	58PH*045-08	17800	12.20	14.50	1
3045204	24ACB318A30	CSPH*2412A**+TDR		17000	11.00	13.00	1
3045214	24ACB318A30	FE4ANF002+UI		17800	12.00	15.00	1
3045215	24ACB318A30	FF1ENP018		17400	11.00	13.00	1
3045216	24ACB318A30	FF1ENP024		17600	11.00	13.20	1
3045217	24ACB318A30	FV4BNF002		17800	12.00	15.00	1
3045212	24ACB318A30	FX4CNF018		17600	11.70	14.50	1
3045213	24ACB318A30	FX4CNF024		17900	11.70	14.50	1
3045210	24ACB318A30	FY4ANF018		17400	11.00	13.00	1
3045211	24ACB318A30	FY4ANF024		17500	11.00	13.00	1
3045218	24ACB324A30	*CAP**2414A**+TDR		23000	11.00	13.00	1
3045219	24ACB324A30	CAP**2414A**	58CV(A,X)070-12	22600	11.50	14.00	1
3045275	24ACB324A30	CAP**2414A**	58PH*045-08	22600	12.00	14.00	1
3045222	24ACB324A30	CAP**2417A**	58CV(A,X)090-16	22600	11.70	14.50	1
3101474	24ACB324A30	CAP**2417A**	58MEB040-12	23000	12.20	14.50	1
3101475	24ACB324A30	CAP**2417A**	58MEB060-12	23000	12.20	14.50	1
3101476	24ACB324A30	CAP**2417A**	58MEB080-12	22800	12.20	14.50	1
3045221	24ACB324A30	CAP**2417A**	58MV(B,C)060-14	22600	11.50	14.00	1
3045274	24ACB324A30	CAP**2417A**	58MV(B,C)080-14	22400	11.50	14.00	1
3045220	24ACB324A30	CAP**2417A**+TDR		22800	11.00	13.00	1
3045224	24ACB324A30	CAP**3014A**	58CV(A,X)070-12	22800	11.50	14.00	1
3045276	24ACB324A30	CAP**3014A**	58PH*045-08	23000	12.00	14.00	1
3045223	24ACB324A30	CAP**3014A**+TDR		23000	11.00	13.00	1
3045227	24ACB324A30	CAP**3017A**	58CV(A,X)090-16	22800	11.70	14.50	1
3101477	24ACB324A30	CAP**3017A**	58MEB040-12	23200	12.20	14.50	1
3101478	24ACB324A30	CAP**3017A**	58MEB060-12	23400	12.20	14.50	1
3101479	24ACB324A30	CAP**3017A**	58MEB080-12	23200	12.20	14.50	1
3045226	24ACB324A30	CAP**3017A**	58MV(B,C)060-14	22800	11.70	14.50	1
3045225	24ACB324A30	CAP**3017A**+TDR		23000	11.00	13.00	1
3045244	24ACB324A30	CNPF*2418A**+TDR		22600	11.00	13.00	1
3045240	24ACB324A30	CNPH*2417A**	58CV(A,X)070-12	22400	11.50	14.00	1
3101486	24ACB324A30	CNPH*2417A**	58MEB040-12	22800	12.00	14.00	1
3101487	24ACB324A30	CNPH*2417A**	58MEB060-12	22800	12.00	14.00	1
3101488	24ACB324A30	CNPH*2417A**	58MEB080-12	22800	12.00	14.00	1
3045239	24ACB324A30	CNPH*2417A**	58MV(B,C)040-14	22400	11.50	14.00	1
3045279	24ACB324A30	CNPH*2417A**	58PH*045-08	22600	12.00	14.00	1
3045238	24ACB324A30	CNPH*2417A**+TDR		22600	11.00	13.00	1
3045243	24ACB324A30	CNPH*3017A**	58CV(A,X)070-12	22600	11.70	14.50	1
3101489	24ACB324A30	CNPH*3017A**	58MEB040-12	23200	12.20	14.50	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3101490	24ACB324A30	CNPH*3017A**	58MEB060-12	23400	12.20	14.50	1
3101491	24ACB324A30	CNPH*3017A**	58MEB080-12	23200	12.20	14.50	1
3045242	24ACB324A30	CNPH*3017A**	58MV(B,C)040-14	22600	11.70	14.50	1
3045280	24ACB324A30	CNPH*3017A**	58PH*045-08	23000	12.00	14.00	1
3045241	24ACB324A30	CNPH*3017A**+TDR		22800	11.00	13.00	1
3045229	24ACB324A30	CNPV*2414A**	58CV(A,X)070-12	22400	11.50	14.00	1
3045277	24ACB324A30	CNPV*2414A**	58PH*045-08	22600	12.00	14.00	1
3045228	24ACB324A30	CNPV*2414A**+TDR		22600	11.00	13.00	1
3045232	24ACB324A30	CNPV*2417A**	58CV(A,X)090-16	22400	11.50	14.00	1
3101480	24ACB324A30	CNPV*2417A**	58MEB040-12	22800	12.00	14.00	1
3101481	24ACB324A30	CNPV*2417A**	58MEB060-12	22800	12.00	14.00	1
3101482	24ACB324A30	CNPV*2417A**	58MEB080-12	22800	12.00	14.00	1
3045231	24ACB324A30	CNPV*2417A**	58MV(B,C)060-14	22400	11.50	14.00	1
3045230	24ACB324A30	CNPV*2417A**+TDR		22600	11.00	13.00	1
3045234	24ACB324A30	CNPV*3014A**	58CV(A,X)070-12	22600	11.15	14.00	1
3045278	24ACB324A30	CNPV*3014A**	58PH*045-08	22800	12.00	14.00	1
3045233	24ACB324A30	CNPV*3014A**+TDR		22800	11.00	13.00	1
3045237	24ACB324A30	CNPV*3017A**	58CV(A,X)090-16	22600	11.70	14.50	1
3101483	24ACB324A30	CNPV*3017A**	58MEB040-12	23200	12.20	14.50	1
3101484	24ACB324A30	CNPV*3017A**	58MEB060-12	23400	12.20	14.50	1
3101485	24ACB324A30	CNPV*3017A**	58MEB080-12	23200	12.20	14.50	1
3045236	24ACB324A30	CNPV*3017A**	58MV(B,C)060-14	22600	11.70	14.50	1
3045235	24ACB324A30	CNPV*3017A**+TDR		22800	11.00	13.00	1
3045248	24ACB324A30	CSPH*2412A**	58CV(A,X)070-12	21800	11.50	14.00	1
3045249	24ACB324A30	CSPH*2412A**	58CV(A,X)090-16	21800	11.70	14.50	1
3045250	24ACB324A30	CSPH*2412A**	58CV(A,X)110-20	21800	11.50	14.00	1
3045251	24ACB324A30	CSPH*2412A**	58CV(A,X)135-22	21800	11.50	14.00	1
3101492	24ACB324A30	CSPH*2412A**	58MEB040-12	23000	12.20	14.50	1
3101493	24ACB324A30	CSPH*2412A**	58MEB060-12	23000	12.20	14.50	1
3101494	24ACB324A30	CSPH*2412A**	58MEB080-12	22800	12.20	14.50	1
3045246	24ACB324A30	CSPH*2412A**	58MV(B,C)040-14	21800	11.50	14.00	1
3045247	24ACB324A30	CSPH*2412A**	58MV(B,C)060-14	21800	11.50	14.00	1
3045281	24ACB324A30	CSPH*2412A**	58PH*045-08	22800	12.00	14.00	1
3045245	24ACB324A30	CSPH*2412A**+TDR		22000	11.00	13.00	1
3045259	24ACB324A30	CSPH*3012A**	58CV(A,X)070-12	21800	11.70	14.50	1
3045260	24ACB324A30	CSPH*3012A**	58CV(A,X)090-16	22000	11.70	14.50	1
3045261	24ACB324A30	CSPH*3012A**	58CV(A,X)110-20	22000	11.70	14.50	1
3045262	24ACB324A30	CSPH*3012A**	58CV(A,X)135-22	22000	11.70	14.50	1
3045263	24ACB324A30	CSPH*3012A**	58CV(A,X)155-22	22000	11.70	14.50	1
3101495	24ACB324A30	CSPH*3012A**	58MEB040-12	23200	12.20	14.50	1
3101496	24ACB324A30	CSPH*3012A**	58MEB060-12	23200	12.20	14.50	1
3101497	24ACB324A30	CSPH*3012A**	58MEB080-12	23200	12.20	14.50	1
3045253	24ACB324A30	CSPH*3012A**	58MV(B,C)040-14	22000	11.70	14.50	1
3045254	24ACB324A30	CSPH*3012A**	58MV(B,C)060-14	21800	11.70	14.50	1
3045255	24ACB324A30	CSPH*3012A**	58MV(B,C)080-14	22000	11.70	14.50	1
3045256	24ACB324A30	CSPH*3012A**	58MV(B,C)080-20	21800	11.70	14.50	1
3045257	24ACB324A30	CSPH*3012A**	58MV(B,C)100-20	22000	11.70	14.50	1
3045258	24ACB324A30	CSPH*3012A**	58MV(B,C)120-20	21800	11.70	14.50	1
3045282	24ACB324A30	CSPH*3012A**	58PH*045-08	23000	12.00	14.00	1
3045252	24ACB324A30	CSPH*3012A**+TDR		22000	11.00	13.00	1
3045269	24ACB324A30	FE4AN(B,F)003+UI		23000	11.70	14.50	1
3045268	24ACB324A30	FE4ANF002+UI		23000	11.70	14.50	1
3045270	24ACB324A30	FF1ENP024		22600	11.00	13.00	1
3045271	24ACB324A30	FF1ENP030		22600	11.00	13.00	1
3045273	24ACB324A30	FV4BN(B,F)003		23000	12.00	15.00	1
3045272	24ACB324A30	FV4BNF002		23000	11.70	14.50	1
3045266	24ACB324A30	FX4CNF024		23000	11.50	14.00	1
3045267	24ACB324A30	FX4CNF030		23200	11.50	14.00	1
3045264	24ACB324A30	FY4ANF024		22600	11.00	13.00	1
3045265	24ACB324A30	FY4ANF030		22800	11.00	13.20	1
3045283	24ACB330A30	*CAP**3014A**+TDR		28000	11.00	13.00	1
3045298	24ACB330A30	CAP**3014A**	58CV(A,X)070-12	27600	11.20	13.50	1
3045346	24ACB330A30	CAP**3014A**	58MV(B,C)080-14	27400	11.20	13.50	1
3045301	24ACB330A30	CAP**3017A**	58CV(A,X)090-16	27600	11.50	14.00	1
3101498	24ACB330A30	CAP**3017A**	58MEB040-12	28000	12.00	14.00	1
3101499	24ACB330A30	CAP**3017A**	58MEB060-12	28000	12.00	14.00	1
3101500	24ACB330A30	CAP**3017A**	58MEB080-12	28000	12.00	14.00	1
3101501	24ACB330A30	CAP**3017A**	58MEB080-16	28000	12.00	14.00	1
3045300	24ACB330A30	CAP**3017A**	58MV(B,C)060-14	27600	11.50	14.00	1
3045284	24ACB330A30	CAP**3017A**	58PH*070-16	27800	11.70	13.50	1
3045299	24ACB330A30	CAP**3017A**+TDR		28000	11.00	13.00	1
3045303	24ACB330A30	CAP**3614A**	58CV(A,X)070-12	27600	11.50	14.00	1
3045302	24ACB330A30	CAP**3614A**+TDR		28000	11.00	13.00	1
3045306	24ACB330A30	CAP**3617A**	58CV(A,X)090-16	27800	11.50	14.00	1
3101502	24ACB330A30	CAP**3617A**	58MEB040-12	28000	12.20	14.50	1
3101503	24ACB330A30	CAP**3617A**	58MEB060-12	28000	12.00	14.00	1
3101504	24ACB330A30	CAP**3617A**	58MEB080-12	28000	12.20	14.50	1
3101505	24ACB330A30	CAP**3617A**	58MEB080-16	28000	12.00	14.00	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045305	24ACB330A30	CAP**3617A**	58MV(B,C)060-14	27600	11.50	14.00	1
3045285	24ACB330A30	CAP**3617A**	58PH*070-16	28000	11.70	14.00	1
3045304	24ACB330A30	CAP**3617A**+TDR		28000	11.00	13.00	1
3045309	24ACB330A30	CAP**3621A**	58CV(A,X)110-20	27800	11.50	14.00	1
3045308	24ACB330A30	CAP**3621A**	58MV(B,C)080-14	27800	11.50	14.00	1
3045286	24ACB330A30	CAP**3621A**	58PH*090-16	28200	12.00	14.00	1
3045307	24ACB330A30	CAP**3621A**+TDR		28000	11.00	13.00	1
3045327	24ACB330A30	CNPF*3618A**+TDR		27800	11.00	13.00	1
3045323	24ACB330A30	CNPH*3017A**	58CV(A,X)070-12	27400	11.50	14.00	1
3101514	24ACB330A30	CNPH*3017A**	58MEB040-12	28000	12.00	14.00	1
3101515	24ACB330A30	CNPH*3017A**	58MEB060-12	28000	12.00	14.00	1
3101516	24ACB330A30	CNPH*3017A**	58MEB080-12	28000	12.00	14.00	1
3101517	24ACB330A30	CNPH*3017A**	58MEB080-16	28000	12.00	14.00	1
3045322	24ACB330A30	CNPH*3017A**	58MV(B,C)040-14	27400	11.20	13.50	1
3045347	24ACB330A30	CNPH*3017A**	58MV(B,C)080-14	27600	11.50	14.00	1
3045290	24ACB330A30	CNPH*3017A**	58PH*070-16	27800	11.70	13.50	1
3045291	24ACB330A30	CNPH*3017A**	58PH*090-16	27800	12.00	14.00	1
3045321	24ACB330A30	CNPH*3017A**+TDR		27800	11.00	13.00	1
3045326	24ACB330A30	CNPH*3617A**	58CV(A,X)070-12	27400	11.50	14.00	1
3101518	24ACB330A30	CNPH*3617A**	58MEB040-12	28000	12.00	14.00	1
3101519	24ACB330A30	CNPH*3617A**	58MEB060-12	28000	12.00	14.00	1
3101520	24ACB330A30	CNPH*3617A**	58MEB080-12	28000	12.00	14.00	1
3101521	24ACB330A30	CNPH*3617A**	58MEB080-16	28000	12.00	14.00	1
3045325	24ACB330A30	CNPH*3617A**	58MV(B,C)040-14	27400	11.20	13.50	1
3045292	24ACB330A30	CNPH*3617A**	58PH*070-16	27800	11.70	13.00	1
3045293	24ACB330A30	CNPH*3617A**	58PH*090-16	27800	12.00	14.00	1
3045324	24ACB330A30	CNPH*3617A**+TDR		27800	11.00	13.00	1
3045311	24ACB330A30	CNPV*3014A**	58CV(A,X)070-12	27400	11.20	13.50	1
3045310	24ACB330A30	CNPV*3014A**+TDR		27800	11.00	13.00	1
3045314	24ACB330A30	CNPV*3017A**	58CV(A,X)090-16	27400	11.50	14.00	1
3101506	24ACB330A30	CNPV*3017A**	58MEB040-12	28000	12.00	14.00	1
3101507	24ACB330A30	CNPV*3017A**	58MEB060-12	28000	12.00	14.00	1
3101508	24ACB330A30	CNPV*3017A**	58MEB080-12	28000	12.00	14.00	1
3101509	24ACB330A30	CNPV*3017A**	58MEB080-16	28000	12.00	14.00	1
3045313	24ACB330A30	CNPV*3017A**	58MV(B,C)060-14	27400	11.50	14.00	1
3045287	24ACB330A30	CNPV*3017A**	58PH*070-16	27800	11.70	13.50	1
3045312	24ACB330A30	CNPV*3017A**+TDR		27800	11.00	13.00	1
3045317	24ACB330A30	CNPV*3617A**	58CV(A,X)090-16	27400	11.50	14.00	1
3101510	24ACB330A30	CNPV*3617A**	58MEB040-12	28000	12.00	14.00	1
3101511	24ACB330A30	CNPV*3617A**	58MEB060-12	28000	12.00	14.00	1
3101512	24ACB330A30	CNPV*3617A**	58MEB080-12	28000	12.00	14.00	1
3101513	24ACB330A30	CNPV*3617A**	58MEB080-16	28000	12.00	14.00	1
3045316	24ACB330A30	CNPV*3617A**	58MV(B,C)060-14	27400	11.50	14.00	1
3045288	24ACB330A30	CNPV*3617A**	58PH*070-16	27800	11.70	13.50	1
3045315	24ACB330A30	CNPV*3617A**+TDR		27800	11.00	13.00	1
3045320	24ACB330A30	CNPV*3621A**	58CV(A,X)110-20	27600	11.50	14.00	1
3045319	24ACB330A30	CNPV*3621A**	58MV(B,C)080-14	27400	11.50	14.00	1
3045348	24ACB330A30	CNPV*3621A**	58MV(B,C)080-20	27600	11.70	14.00	1
3045289	24ACB330A30	CNPV*3621A**	58PH*090-16	27800	12.00	14.00	1
3045318	24ACB330A30	CNPV*3621A**+TDR		27800	11.00	13.00	1
3045330	24ACB330A30	CSPH*3012A**	58CV(A,X)070-12	26800	11.50	14.00	1
3101522	24ACB330A30	CSPH*3012A**	58MEB040-12	28000	12.00	14.00	1
3101523	24ACB330A30	CSPH*3012A**	58MEB060-12	28000	12.00	14.00	1
3101524	24ACB330A30	CSPH*3012A**	58MEB080-12	28000	12.00	14.00	1
3101525	24ACB330A30	CSPH*3012A**	58MEB080-16	28000	12.00	14.00	1
3045329	24ACB330A30	CSPH*3012A**	58MV(B,C)040-14	26800	11.20	13.50	1
3045294	24ACB330A30	CSPH*3012A**	58PH*070-16	27800	11.70	13.50	1
3045295	24ACB330A30	CSPH*3012A**	58PH*090-16	27800	11.70	14.00	1
3045328	24ACB330A30	CSPH*3012A**+TDR		27000	11.00	13.00	1
3045333	24ACB330A30	CSPH*3612A**	58CV(A,X)070-12	27200	11.50	14.00	1
3101526	24ACB330A30	CSPH*3612A**	58MEB040-12	28000	12.20	14.50	1
3101527	24ACB330A30	CSPH*3612A**	58MEB060-12	28000	12.00	14.00	1
3101528	24ACB330A30	CSPH*3612A**	58MEB080-12	28000	12.20	14.50	1
3101529	24ACB330A30	CSPH*3612A**	58MEB080-16	28000	12.00	14.00	1
3045332	24ACB330A30	CSPH*3612A**	58MV(B,C)040-14	27200	11.50	14.00	1
3045296	24ACB330A30	CSPH*3612A**	58PH*070-16	28000	12.00	14.00	1
3045297	24ACB330A30	CSPH*3612A**	58PH*090-16	28200	12.00	14.00	1
3045331	24ACB330A30	CSPH*3612A**+TDR		27400	11.00	13.20	1
3045339	24ACB330A30	FE4AN(B,F)003+UI		28000	11.70	14.50	1
3045340	24ACB330A30	FE4AN(B,F)005+UI		28800	12.00	15.00	1
3045338	24ACB330A30	FE4ANF002+UI		27800	11.50	14.00	1
3045341	24ACB330A30	FF1ENP030		27400	11.00	13.00	1
3045342	24ACB330A30	FF1ENP036		28000	11.00	13.20	1
3045344	24ACB330A30	FV4BN(B,F)003		28000	11.70	14.50	1
3045345	24ACB330A30	FV4BN(B,F)005		28800	12.00	15.00	1
3045343	24ACB330A30	FV4BNF002		27800	11.50	14.00	1
3045337	24ACB330A30	FX4CN(B,F)036		28200	11.50	14.00	1
3045336	24ACB330A30	FX4CNF030		28000	11.20	13.50	1
3045334	24ACB330A30	FY4ANF030		27600	11.00	13.00	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045335	24ACB330A30	FY4ANF036		27800	11.00	13.00	1
3046044	24ACB330A50	*CAP**3014A**+TDR		28000	11.00	13.00	3
3046059	24ACB330A50	CAP**3014A**	58CV(A,X)070-12	27600	11.20	13.50	3
3046107	24ACB330A50	CAP**3014A**	58MV(B,C)080-14	27400	11.20	13.50	3
3046062	24ACB330A50	CAP**3017A**	58CV(A,X)090-16	27600	11.50	14.00	3
3123955	24ACB330A50	CAP**3017A**	58MEB040-12	28000	12.00	14.00	3
3123956	24ACB330A50	CAP**3017A**	58MEB060-12	28000	12.00	14.00	3
3123957	24ACB330A50	CAP**3017A**	58MEB080-12	28000	12.00	14.00	3
3123958	24ACB330A50	CAP**3017A**	58MEB080-16	28000	12.00	14.00	3
3046061	24ACB330A50	CAP**3017A**	58MV(B,C)060-14	27600	11.50	14.00	3
3046045	24ACB330A50	CAP**3017A**	58PH*070-16	27800	11.70	13.50	3
3046060	24ACB330A50	CAP**3017A**+TDR		28000	11.00	13.00	3
3046064	24ACB330A50	CAP**3614A**	58CV(A,X)070-12	27600	11.50	14.00	3
3046063	24ACB330A50	CAP**3614A**+TDR		28000	11.00	13.00	3
3046067	24ACB330A50	CAP**3617A**	58CV(A,X)090-16	27800	11.50	14.00	3
3123959	24ACB330A50	CAP**3617A**	58MEB040-12	28000	12.20	14.50	3
3123960	24ACB330A50	CAP**3617A**	58MEB060-12	28000	12.00	14.00	3
3123961	24ACB330A50	CAP**3617A**	58MEB080-12	28000	12.20	14.50	3
3123962	24ACB330A50	CAP**3617A**	58MEB080-16	28000	12.00	14.00	3
3046066	24ACB330A50	CAP**3617A**	58MV(B,C)060-14	27600	11.50	14.00	3
3046046	24ACB330A50	CAP**3617A**	58PH*070-16	28000	11.70	14.00	3
3046065	24ACB330A50	CAP**3617A**+TDR		28000	11.00	13.00	3
3046070	24ACB330A50	CAP**3621A**	58CV(A,X)110-20	27800	11.50	14.00	3
3046069	24ACB330A50	CAP**3621A**	58MV(B,C)080-14	27800	11.50	14.00	3
3046047	24ACB330A50	CAP**3621A**	58PH*090-16	28200	12.00	14.00	3
3046068	24ACB330A50	CAP**3621A**+TDR		28000	11.00	13.00	3
3046088	24ACB330A50	CNPF*3618A**+TDR		27800	11.00	13.00	3
3046084	24ACB330A50	CNPH*3017A**	58CV(A,X)070-12	27400	11.50	14.00	3
3123971	24ACB330A50	CNPH*3017A**	58MEB040-12	28000	12.00	14.00	3
3123972	24ACB330A50	CNPH*3017A**	58MEB060-12	28000	12.00	14.00	3
3123973	24ACB330A50	CNPH*3017A**	58MEB080-12	28000	12.00	14.00	3
3123974	24ACB330A50	CNPH*3017A**	58MEB080-16	28000	12.00	14.00	3
3046083	24ACB330A50	CNPH*3017A**	58MV(B,C)040-14	27400	11.20	13.50	3
3046108	24ACB330A50	CNPH*3017A**	58MV(B,C)080-14	27600	11.50	14.00	3
3046051	24ACB330A50	CNPH*3017A**	58PH*070-16	27800	11.70	13.50	3
3046052	24ACB330A50	CNPH*3017A**	58PH*090-16	27800	12.00	14.00	3
3046082	24ACB330A50	CNPH*3017A**+TDR		27800	11.00	13.00	3
3046087	24ACB330A50	CNPH*3617A**	58CV(A,X)070-12	27400	11.50	14.00	3
3123975	24ACB330A50	CNPH*3617A**	58MEB040-12	28000	12.00	14.00	3
3123976	24ACB330A50	CNPH*3617A**	58MEB060-12	28000	12.00	14.00	3
3123977	24ACB330A50	CNPH*3617A**	58MEB080-12	28000	12.00	14.00	3
3123978	24ACB330A50	CNPH*3617A**	58MEB080-16	28000	12.00	14.00	3
3046086	24ACB330A50	CNPH*3617A**	58MV(B,C)040-14	27400	11.20	13.50	3
3046053	24ACB330A50	CNPH*3617A**	58PH*070-16	27800	11.70	13.00	3
3046054	24ACB330A50	CNPH*3617A**	58PH*090-16	27800	12.00	14.00	3
3046085	24ACB330A50	CNPH*3617A**+TDR		27800	11.00	13.00	3
3046072	24ACB330A50	CNPV*3014A**	58CV(A,X)070-12	27400	11.20	13.50	3
3046071	24ACB330A50	CNPV*3014A**+TDR		27800	11.00	13.00	3
3046075	24ACB330A50	CNPV*3017A**	58CV(A,X)090-16	27400	11.50	14.00	3
3123963	24ACB330A50	CNPV*3017A**	58MEB040-12	28000	12.00	14.00	3
3123964	24ACB330A50	CNPV*3017A**	58MEB060-12	28000	12.00	14.00	3
3123965	24ACB330A50	CNPV*3017A**	58MEB080-12	28000	12.00	14.00	3
3123966	24ACB330A50	CNPV*3017A**	58MEB080-16	28000	12.00	14.00	3
3046074	24ACB330A50	CNPV*3017A**	58MV(B,C)060-14	27400	11.50	14.00	3
3046048	24ACB330A50	CNPV*3017A**	58PH*070-16	27800	11.70	13.50	3
3046073	24ACB330A50	CNPV*3017A**+TDR		27800	11.00	13.00	3
3046078	24ACB330A50	CNPV*3617A**	58CV(A,X)090-16	27400	11.50	14.00	3
3123967	24ACB330A50	CNPV*3617A**	58MEB040-12	28000	12.00	14.00	3
3123968	24ACB330A50	CNPV*3617A**	58MEB060-12	28000	12.00	14.00	3
3123969	24ACB330A50	CNPV*3617A**	58MEB080-12	28000	12.00	14.00	3
3123970	24ACB330A50	CNPV*3617A**	58MEB080-16	28000	12.00	14.00	3
3046077	24ACB330A50	CNPV*3617A**	58MV(B,C)060-14	27400	11.50	14.00	3
3046049	24ACB330A50	CNPV*3617A**	58PH*070-16	27800	11.70	13.50	3
3046076	24ACB330A50	CNPV*3617A**+TDR		27800	11.00	13.00	3
3046081	24ACB330A50	CNPV*3621A**	58CV(A,X)110-20	27600	11.50	14.00	3
3046080	24ACB330A50	CNPV*3621A**	58MV(B,C)080-14	27400	11.50	14.00	3
3046109	24ACB330A50	CNPV*3621A**	58MV(B,C)080-20	27600	11.70	14.00	3
3046050	24ACB330A50	CNPV*3621A**	58PH*090-16	27800	12.00	14.00	3
3046079	24ACB330A50	CNPV*3621A**+TDR		27800	11.00	13.00	3
3046091	24ACB330A50	CSPH*3012A**	58CV(A,X)070-12	26800	11.50	14.00	3
3123979	24ACB330A50	CSPH*3012A**	58MEB040-12	28000	12.00	14.00	3
3123980	24ACB330A50	CSPH*3012A**	58MEB060-12	28000	12.00	14.00	3
3123981	24ACB330A50	CSPH*3012A**	58MEB080-12	28000	12.00	14.00	3
3123982	24ACB330A50	CSPH*3012A**	58MEB080-16	28000	12.00	14.00	3
3046090	24ACB330A50	CSPH*3012A**	58MV(B,C)040-14	26800	11.20	13.50	3
3046055	24ACB330A50	CSPH*3012A**	58PH*070-16	27800	11.70	13.50	3
3046056	24ACB330A50	CSPH*3012A**	58PH*090-16	27800	11.70	14.00	3
3046089	24ACB330A50	CSPH*3012A**+TDR		27000	11.00	13.00	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046094	24ACB330A50	CSPH*3612A**	58CV(A,X)070-12	27200	11.50	14.00	3
3123983	24ACB330A50	CSPH*3612A**	58MEB040-12	28000	12.20	14.50	3
3123984	24ACB330A50	CSPH*3612A**	58MEB060-12	28000	12.00	14.00	3
3123985	24ACB330A50	CSPH*3612A**	58MEB080-12	28000	12.20	14.50	3
3123986	24ACB330A50	CSPH*3612A**	58MEB080-16	28000	12.00	14.00	3
3046093	24ACB330A50	CSPH*3612A**	58MV(B,C)040-14	27200	11.50	14.00	3
3046057	24ACB330A50	CSPH*3612A**	58PH*070-16	28000	12.00	14.00	3
3046058	24ACB330A50	CSPH*3612A**	58PH*090-16	28200	12.00	14.00	3
3046092	24ACB330A50	CSPH*3612A**+TDR		27400	11.00	13.20	3
3046100	24ACB330A50	FE4AN(B,F)003+UI		28000	11.70	14.50	3
3046101	24ACB330A50	FE4AN(B,F)005+UI		28800	12.00	15.00	3
3046099	24ACB330A50	FE4ANF002+UI		27800	11.50	14.00	3
3046102	24ACB330A50	FF1ENP030		27400	11.00	13.00	3
3046103	24ACB330A50	FF1ENP036		28000	11.00	13.20	3
3046105	24ACB330A50	FV4BN(B,F)003		28000	11.70	14.50	3
3046106	24ACB330A50	FV4BN(B,F)005		28800	12.00	15.00	3
3046104	24ACB330A50	FV4BNF002		27800	11.50	14.00	3
3046098	24ACB330A50	FX4CN(B,F)036		28200	11.50	14.00	3
3046097	24ACB330A50	FX4CNF030		28000	11.20	13.50	3
3046095	24ACB330A50	FY4ANF030		27600	11.00	13.00	3
3046096	24ACB330A50	FY4ANF036		27800	11.00	13.00	3
3045349	24ACB336A30	*CAP**3617A**+TDR		34000	11.00	13.00	1
3045378	24ACB336A30	CAP**3614A**	58CV(A,X)070-12	33000	11.20	13.50	1
3045350	24ACB336A30	CAP**3614A**	58PH*045-08	33600	11.00	13.20	1
3045377	24ACB336A30	CAP**3614A**+TDR		33000	11.00	13.00	1
3045380	24ACB336A30	CAP**3617A**	58CV(A,X)090-16	33600	11.50	14.00	1
3101530	24ACB336A30	CAP**3617A**	58MEB040-12	34000	12.00	14.00	1
3101531	24ACB336A30	CAP**3617A**	58MEB060-12	34000	12.00	14.00	1
3101532	24ACB336A30	CAP**3617A**	58MEB080-12	34000	12.00	14.00	1
3101533	24ACB336A30	CAP**3617A**	58MEB080-16	34000	12.00	14.00	1
3045379	24ACB336A30	CAP**3617A**	58MV(B,C)060-14	33600	11.50	14.00	1
3045351	24ACB336A30	CAP**3617A**	58PH*070-16	33800	11.70	13.50	1
3045383	24ACB336A30	CAP**3621A**	58CV(A,X)110-20	33800	11.50	14.00	1
3101534	24ACB336A30	CAP**3621A**	58MEB100-20	34000	12.20	14.50	1
3045382	24ACB336A30	CAP**3621A**	58MV(B,C)080-14	33600	11.20	13.50	1
3045352	24ACB336A30	CAP**3621A**	58PH*090-16	34000	12.00	14.50	1
3045353	24ACB336A30	CAP**3621A**	58PH*110-20	34000	12.00	14.50	1
3045381	24ACB336A30	CAP**3621A**+TDR		34000	11.00	13.00	1
3045386	24ACB336A30	CAP**4221A**	58CV(A,X)110-20	34000	11.50	14.00	1
3101535	24ACB336A30	CAP**4221A**	58MEB100-20	34000	12.20	14.50	1
3045385	24ACB336A30	CAP**4221A**	58MV(B,C)080-14	33800	11.50	14.00	1
3045354	24ACB336A30	CAP**4221A**	58PH*090-16	34400	12.20	14.50	1
3045355	24ACB336A30	CAP**4221A**	58PH*110-20	34400	12.20	14.50	1
3045384	24ACB336A30	CAP**4221A**+TDR		34000	11.00	13.00	1
3045389	24ACB336A30	CAP**4224A**	58CV(A,X)135-22	34000	11.70	14.50	1
3045388	24ACB336A30	CAP**4224A**	58MV(B,C)040-14	33800	11.50	14.00	1
3045387	24ACB336A30	CAP**4224A**+TDR		34000	11.00	13.00	1
3045406	24ACB336A30	CNPF*3618A**+TDR		33800	11.00	13.00	1
3045401	24ACB336A30	CNPH*3617A**	58CV(A,X)070-12	33200	11.20	13.50	1
3101546	24ACB336A30	CNPH*3617A**	58MEB040-12	34000	12.00	14.00	1
3101547	24ACB336A30	CNPH*3617A**	58MEB060-12	34000	12.00	14.00	1
3101548	24ACB336A30	CNPH*3617A**	58MEB080-12	33800	12.00	14.00	1
3101549	24ACB336A30	CNPH*3617A**	58MEB080-16	34000	12.00	14.00	1
3101550	24ACB336A30	CNPH*3617A**	58MEB100-20	33800	12.00	14.00	1
3045400	24ACB336A30	CNPH*3617A**	58MV(B,C)040-14	33200	11.20	13.50	1
3045361	24ACB336A30	CNPH*3617A**	58PH*045-08	33600	11.00	13.20	1
3045362	24ACB336A30	CNPH*3617A**	58PH*070-16	33600	11.70	13.50	1
3045363	24ACB336A30	CNPH*3617A**	58PH*090-16	34000	12.00	14.00	1
3045364	24ACB336A30	CNPH*3617A**	58PH*110-20	34000	12.00	14.00	1
3045399	24ACB336A30	CNPH*3617A**+TDR		33800	11.00	13.00	1
3045405	24ACB336A30	CNPH*4221A**	58CV(A,X)070-12	34200	11.50	14.00	1
3101551	24ACB336A30	CNPH*4221A**	58MEB040-12	34000	12.00	14.00	1
3101552	24ACB336A30	CNPH*4221A**	58MEB060-12	34000	12.00	14.00	1
3101553	24ACB336A30	CNPH*4221A**	58MEB080-12	34000	12.00	14.00	1
3101554	24ACB336A30	CNPH*4221A**	58MEB080-16	34000	12.00	14.00	1
3101555	24ACB336A30	CNPH*4221A**	58MEB100-20	34000	12.20	14.50	1
3045403	24ACB336A30	CNPH*4221A**	58MV(B,C)040-14	34200	11.50	14.00	1
3045404	24ACB336A30	CNPH*4221A**	58MV(B,C)060-14	34400	11.50	14.00	1
3045365	24ACB336A30	CNPH*4221A**	58PH*045-08	34000	11.50	13.50	1
3045366	24ACB336A30	CNPH*4221A**	58PH*070-16	34200	11.70	14.00	1
3045367	24ACB336A30	CNPH*4221A**	58PH*090-16	34400	12.20	14.50	1
3045368	24ACB336A30	CNPH*4221A**	58PH*110-20	34400	12.20	14.50	1
3045402	24ACB336A30	CNPH*4221A**+TDR		34000	11.00	13.00	1
3045392	24ACB336A30	CNPV*3617A**	58CV(A,X)090-16	33400	11.50	14.00	1
3101536	24ACB336A30	CNPV*3617A**	58MEB040-12	34000	12.00	14.00	1
3101537	24ACB336A30	CNPV*3617A**	58MEB060-12	34000	12.00	14.00	1
3101538	24ACB336A30	CNPV*3617A**	58MEB080-12	33800	12.00	14.00	1
3101539	24ACB336A30	CNPV*3617A**	58MEB080-16	34000	12.00	14.00	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045391	24ACB336A30	CNPV*3617A**	58MV(B,C)060-14	33200	11.20	13.50	1
3045356	24ACB336A30	CNPV*3617A**	58PH*070-16	33600	11.70	13.50	1
3045390	24ACB336A30	CNPV*3617A**+TDR		33800	11.00	13.00	1
3045395	24ACB336A30	CNPV*3621A**	58CV(A,X)110-20	33800	11.20	13.50	1
3101540	24ACB336A30	CNPV*3621A**	58MEB100-20	33800	12.20	14.50	1
3045394	24ACB336A30	CNPV*3621A**	58MV(B,C)080-14	33600	11.00	13.00	1
3045357	24ACB336A30	CNPV*3621A**	58PH*090-16	34000	12.00	14.00	1
3045358	24ACB336A30	CNPV*3621A**	58PH*110-20	34000	12.00	14.00	1
3045393	24ACB336A30	CNPV*3621A**+TDR		33800	11.00	13.00	1
3101803	24ACB336A30	CNPV*4217A**	58CV(A,X)090-16	34000	12.20	14.50	1
3101541	24ACB336A30	CNPV*4217A**	58MEB040-12	34000	12.20	14.50	1
3101542	24ACB336A30	CNPV*4217A**	58MEB060-12	34000	12.20	14.50	1
3101543	24ACB336A30	CNPV*4217A**	58MEB080-12	34000	12.20	14.50	1
3101544	24ACB336A30	CNPV*4217A**	58MEB080-16	34000	12.20	14.50	1
3101802	24ACB336A30	CNPV*4217A**	58MV(B,C)060-14	34000	12.00	14.00	1
3101804	24ACB336A30	CNPV*4217A**	58PH*070-16	34000	12.00	14.00	1
3101805	24ACB336A30	CNPV*4217A**+TDR		34000	11.00	13.20	1
3045398	24ACB336A30	CNPV*4221A**	58CV(A,X)110-20	34600	11.70	14.50	1
3101545	24ACB336A30	CNPV*4221A**	58MEB100-20	34000	12.20	14.50	1
3045397	24ACB336A30	CNPV*4221A**	58MV(B,C)080-14	34200	11.50	14.00	1
3045426	24ACB336A30	CNPV*4221A**	58MV(B,C)100-20	34200	11.70	14.00	1
3045359	24ACB336A30	CNPV*4221A**	58PH*090-16	34400	12.20	14.50	1
3045360	24ACB336A30	CNPV*4221A**	58PH*110-20	34400	12.20	14.50	1
3045396	24ACB336A30	CNPV*4221A**+TDR		34000	11.00	13.00	1
3045409	24ACB336A30	CSPH*3612A**	58CV(A,X)070-12	33200	11.50	14.00	1
3101556	24ACB336A30	CSPH*3612A**	58MEB040-12	34000	12.00	14.00	1
3101557	24ACB336A30	CSPH*3612A**	58MEB060-12	34000	12.00	14.00	1
3101558	24ACB336A30	CSPH*3612A**	58MEB080-12	34000	12.00	14.00	1
3101559	24ACB336A30	CSPH*3612A**	58MEB080-16	34000	12.00	14.00	1
3101560	24ACB336A30	CSPH*3612A**	58MEB100-20	34000	12.20	14.50	1
3045408	24ACB336A30	CSPH*3612A**	58MV(B,C)040-14	33200	11.50	14.00	1
3045369	24ACB336A30	CSPH*3612A**	58PH*045-08	34000	11.70	13.50	1
3045370	24ACB336A30	CSPH*3612A**	58PH*070-16	34000	12.00	14.00	1
3045371	24ACB336A30	CSPH*3612A**	58PH*090-16	34000	12.00	14.50	1
3045372	24ACB336A30	CSPH*3612A**	58PH*110-20	34000	12.00	14.50	1
3045407	24ACB336A30	CSPH*3612A**+TDR		33600	11.00	13.00	1
3045412	24ACB336A30	CSPH*4212A**	58CV(A,X)070-12	34000	11.20	13.50	1
3101561	24ACB336A30	CSPH*4212A**	58MEB040-12	34000	12.20	14.50	1
3101562	24ACB336A30	CSPH*4212A**	58MEB060-12	34000	12.20	14.50	1
3101563	24ACB336A30	CSPH*4212A**	58MEB080-12	34000	12.20	14.50	1
3101564	24ACB336A30	CSPH*4212A**	58MEB080-16	34000	12.20	14.50	1
3101565	24ACB336A30	CSPH*4212A**	58MEB100-20	34000	12.20	14.50	1
3045411	24ACB336A30	CSPH*4212A**	58MV(B,C)040-14	33800	11.20	13.50	1
3045373	24ACB336A30	CSPH*4212A**	58PH*045-08	34400	11.70	13.50	1
3045374	24ACB336A30	CSPH*4212A**	58PH*070-16	34400	12.00	14.00	1
3045375	24ACB336A30	CSPH*4212A**	58PH*090-16	34400	12.20	14.50	1
3045376	24ACB336A30	CSPH*4212A**	58PH*110-20	34400	12.20	14.50	1
3045410	24ACB336A30	CSPH*4212A**+TDR		33800	11.20	13.20	1
3045418	24ACB336A30	FE4AN(B,F)003+UI		34000	11.70	14.50	1
3045419	24ACB336A30	FE4AN(B,F)005+UI		35000	12.00	15.00	1
3045420	24ACB336A30	FE4ANB006+UI		35400	12.00	15.00	1
3045417	24ACB336A30	FE4ANF002+UI		33600	11.50	14.00	1
3045421	24ACB336A30	FF1ENP036		33800	11.00	13.00	1
3045423	24ACB336A30	FV4BN(B,F)003		34000	11.70	14.50	1
3045424	24ACB336A30	FV4BN(B,F)005		35000	12.00	15.00	1
3045425	24ACB336A30	FV4BNB006		35400	12.00	15.00	1
3045422	24ACB336A30	FV4BNF002		33600	11.50	14.00	1
3045415	24ACB336A30	FX4CN(B,F)036		34400	11.50	14.00	1
3045416	24ACB336A30	FX4CN(B,F)042		34800	11.50	14.00	1
3045413	24ACB336A30	FY4ANF036		33800	11.00	13.00	1
3045414	24ACB336A30	FY4ANF042		34400	11.00	13.00	1
3046110	24ACB336A50	*CAP**3617A**+TDR		34000	11.00	13.00	3
3046139	24ACB336A50	CAP**3614A**	58CV(A,X)070-12	33000	11.20	13.50	3
3046111	24ACB336A50	CAP**3614A**	58PH*045-08	33600	11.00	13.20	3
3046138	24ACB336A50	CAP**3614A**+TDR		33000	11.00	13.00	3
3046141	24ACB336A50	CAP**3617A**	58CV(A,X)090-16	33600	11.50	14.00	3
3123987	24ACB336A50	CAP**3617A**	58MEB040-12	34000	12.00	14.00	3
3123988	24ACB336A50	CAP**3617A**	58MEB060-12	34000	12.00	14.00	3
3123989	24ACB336A50	CAP**3617A**	58MEB080-12	34000	12.00	14.00	3
3123990	24ACB336A50	CAP**3617A**	58MEB080-16	34000	12.00	14.00	3
3046140	24ACB336A50	CAP**3617A**	58MV(B,C)060-14	33600	11.50	14.00	3
3046112	24ACB336A50	CAP**3617A**	58PH*070-16	33800	11.70	13.50	3
3046144	24ACB336A50	CAP**3621A**	58CV(A,X)110-20	33800	11.50	14.00	3
3123991	24ACB336A50	CAP**3621A**	58MEB100-20	34000	12.20	14.50	3
3046143	24ACB336A50	CAP**3621A**	58MV(B,C)080-14	33600	11.20	13.50	3
3046113	24ACB336A50	CAP**3621A**	58PH*090-16	34000	12.00	14.50	3
3046114	24ACB336A50	CAP**3621A**	58PH*110-20	34000	12.00	14.50	3
3046142	24ACB336A50	CAP**3621A**+TDR		34000	11.00	13.00	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046147	24ACB336A50	CAP**4221A**	58CV(A,X)110-20	34000	11.50	14.00	3
3123992	24ACB336A50	CAP**4221A**	58MEB100-20	34000	12.20	14.50	3
3046146	24ACB336A50	CAP**4221A**	58MV(B,C)080-14	33800	11.50	14.00	3
3046115	24ACB336A50	CAP**4221A**	58PH*090-16	34400	12.20	14.50	3
3046116	24ACB336A50	CAP**4221A**	58PH*110-20	34400	12.20	14.50	3
3046145	24ACB336A50	CAP**4221A**+TDR		34000	11.00	13.00	3
3046150	24ACB336A50	CAP**4224A**	58CV(A,X)135-22	34000	11.70	14.50	3
3046149	24ACB336A50	CAP**4224A**	58MV(B,C)040-14	33800	11.50	14.00	3
3046148	24ACB336A50	CAP**4224A**+TDR		34000	11.00	13.00	3
3046167	24ACB336A50	CNPF*3618A**+TDR		33800	11.00	13.00	3
3046162	24ACB336A50	CNPH*3617A**	58CV(A,X)070-12	33200	11.20	13.50	3
3124003	24ACB336A50	CNPH*3617A**	58MEB040-12	34000	12.00	14.00	3
3124004	24ACB336A50	CNPH*3617A**	58MEB060-12	34000	12.00	14.00	3
3124005	24ACB336A50	CNPH*3617A**	58MEB080-12	33800	12.00	14.00	3
3124006	24ACB336A50	CNPH*3617A**	58MEB080-16	34000	12.00	14.00	3
3124007	24ACB336A50	CNPH*3617A**	58MEB100-20	33800	12.00	14.00	3
3046161	24ACB336A50	CNPH*3617A**	58MV(B,C)040-14	33200	11.20	13.50	3
3046122	24ACB336A50	CNPH*3617A**	58PH*045-08	33600	11.00	13.20	3
3046123	24ACB336A50	CNPH*3617A**	58PH*070-16	33600	11.70	13.50	3
3046124	24ACB336A50	CNPH*3617A**	58PH*090-16	34000	12.00	14.00	3
3046125	24ACB336A50	CNPH*3617A**	58PH*110-20	34000	12.00	14.00	3
3046160	24ACB336A50	CNPH*3617A**+TDR		33800	11.00	13.00	3
3046166	24ACB336A50	CNPH*4221A**	58CV(A,X)070-12	34200	11.50	14.00	3
3124008	24ACB336A50	CNPH*4221A**	58MEB040-12	34000	12.00	14.00	3
3124009	24ACB336A50	CNPH*4221A**	58MEB060-12	34000	12.00	14.00	3
3124010	24ACB336A50	CNPH*4221A**	58MEB080-12	34000	12.00	14.00	3
3124011	24ACB336A50	CNPH*4221A**	58MEB080-16	34000	12.00	14.00	3
3124012	24ACB336A50	CNPH*4221A**	58MEB100-20	34000	12.20	14.50	3
3046164	24ACB336A50	CNPH*4221A**	58MV(B,C)040-14	34200	11.50	14.00	3
3046165	24ACB336A50	CNPH*4221A**	58MV(B,C)060-14	34400	11.50	14.00	3
3046126	24ACB336A50	CNPH*4221A**	58PH*045-08	34000	11.50	13.50	3
3046127	24ACB336A50	CNPH*4221A**	58PH*070-16	34200	11.70	14.00	3
3046128	24ACB336A50	CNPH*4221A**	58PH*090-16	34400	12.20	14.50	3
3046129	24ACB336A50	CNPH*4221A**	58PH*110-20	34400	12.20	14.50	3
3046163	24ACB336A50	CNPH*4221A**+TDR		34000	11.00	13.00	3
3046153	24ACB336A50	CNPV*3617A**	58CV(A,X)090-16	33400	11.50	14.00	3
3123993	24ACB336A50	CNPV*3617A**	58MEB040-12	34000	12.00	14.00	3
3123994	24ACB336A50	CNPV*3617A**	58MEB060-12	34000	12.00	14.00	3
3123995	24ACB336A50	CNPV*3617A**	58MEB080-12	33800	12.00	14.00	3
3123996	24ACB336A50	CNPV*3617A**	58MEB080-16	34000	12.00	14.00	3
3046152	24ACB336A50	CNPV*3617A**	58MV(B,C)060-14	33200	11.20	13.50	3
3046117	24ACB336A50	CNPV*3617A**	58PH*070-16	33600	11.70	13.50	3
3046151	24ACB336A50	CNPV*3617A**+TDR		33800	11.00	13.00	3
3046156	24ACB336A50	CNPV*3621A**	58CV(A,X)110-20	33800	11.20	13.50	3
3123997	24ACB336A50	CNPV*3621A**	58MEB100-20	33800	12.20	14.50	3
3046155	24ACB336A50	CNPV*3621A**	58MV(B,C)080-14	33600	11.00	13.00	3
3046118	24ACB336A50	CNPV*3621A**	58PH*090-16	34000	12.00	14.00	3
3046119	24ACB336A50	CNPV*3621A**	58PH*110-20	34000	12.00	14.00	3
3046154	24ACB336A50	CNPV*3621A**+TDR		33800	11.00	13.00	3
3123998	24ACB336A50	CNPV*4217A**	58MEB040-12	34000	12.20	14.50	3
3123999	24ACB336A50	CNPV*4217A**	58MEB060-12	34000	12.20	14.50	3
3124000	24ACB336A50	CNPV*4217A**	58MEB080-12	34000	12.20	14.50	3
3124001	24ACB336A50	CNPV*4217A**	58MEB080-16	34000	12.20	14.50	3
3046159	24ACB336A50	CNPV*4221A**	58CV(A,X)110-20	34600	11.70	14.50	3
3124002	24ACB336A50	CNPV*4221A**	58MEB100-20	34000	12.20	14.50	3
3046158	24ACB336A50	CNPV*4221A**	58MV(B,C)080-14	34200	11.50	14.00	3
3046187	24ACB336A50	CNPV*4221A**	58MV(B,C)100-20	34200	11.70	14.00	3
3046120	24ACB336A50	CNPV*4221A**	58PH*090-16	34400	12.20	14.50	3
3046121	24ACB336A50	CNPV*4221A**	58PH*110-20	34400	12.20	14.50	3
3046157	24ACB336A50	CNPV*4221A**+TDR		34000	11.00	13.00	3
3046170	24ACB336A50	CSPH*3612A**	58CV(A,X)070-12	33200	11.50	14.00	3
3124013	24ACB336A50	CSPH*3612A**	58MEB040-12	34000	12.00	14.00	3
3124014	24ACB336A50	CSPH*3612A**	58MEB060-12	34000	12.00	14.00	3
3124015	24ACB336A50	CSPH*3612A**	58MEB080-12	34000	12.00	14.00	3
3124016	24ACB336A50	CSPH*3612A**	58MEB080-16	34000	12.00	14.00	3
3124017	24ACB336A50	CSPH*3612A**	58MEB100-20	34000	12.20	14.50	3
3046169	24ACB336A50	CSPH*3612A**	58MV(B,C)040-14	33200	11.50	14.00	3
3046130	24ACB336A50	CSPH*3612A**	58PH*045-08	34000	11.70	13.50	3
3046131	24ACB336A50	CSPH*3612A**	58PH*070-16	34000	12.00	14.00	3
3046132	24ACB336A50	CSPH*3612A**	58PH*090-16	34000	12.00	14.50	3
3046133	24ACB336A50	CSPH*3612A**	58PH*110-20	34000	12.00	14.50	3
3046168	24ACB336A50	CSPH*3612A**+TDR		33600	11.00	13.00	3
3046173	24ACB336A50	CSPH*4212A**	58CV(A,X)070-12	34000	11.20	13.50	3
3124018	24ACB336A50	CSPH*4212A**	58MEB040-12	34000	12.20	14.50	3
3124019	24ACB336A50	CSPH*4212A**	58MEB060-12	34000	12.20	14.50	3
3124020	24ACB336A50	CSPH*4212A**	58MEB080-12	34000	12.20	14.50	3
3124021	24ACB336A50	CSPH*4212A**	58MEB080-16	34000	12.20	14.50	3
3124022	24ACB336A50	CSPH*4212A**	58MEB100-20	34000	12.20	14.50	3
3046172	24ACB336A50	CSPH*4212A**	58MV(B,C)040-14	33800	11.20	13.50	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046134	24ACB336A50	CSPH*4212A**	58PH*045-08	34400	11.70	13.50	3
3046135	24ACB336A50	CSPH*4212A**	58PH*070-16	34400	12.00	14.00	3
3046136	24ACB336A50	CSPH*4212A**	58PH*090-16	34400	12.20	14.50	3
3046137	24ACB336A50	CSPH*4212A**	58PH*110-20	34400	12.20	14.50	3
3046171	24ACB336A50	CSPH*4212A**+TDR		33800	11.20	13.20	3
3046179	24ACB336A50	FE4AN(B,F)003+UI		34000	11.70	14.50	3
3046180	24ACB336A50	FE4AN(B,F)005+UI		35000	12.00	15.00	3
3046181	24ACB336A50	FE4ANB006+UI		35400	12.00	15.00	3
3046178	24ACB336A50	FE4ANF002+UI		33600	11.50	14.00	3
3046182	24ACB336A50	FF1ENP036		33800	11.00	13.00	3
3046184	24ACB336A50	FV4BN(B,F)003		34000	11.70	14.50	3
3046185	24ACB336A50	FV4BN(B,F)005		35000	12.00	15.00	3
3046186	24ACB336A50	FV4BNB006		35400	12.00	15.00	3
3046183	24ACB336A50	FV4BNF002		33600	11.50	14.00	3
3046176	24ACB336A50	FX4CN(B,F)036		34400	11.50	14.00	3
3046177	24ACB336A50	FX4CN(B,F)042		34800	11.50	14.00	3
3046174	24ACB336A50	FY4ANF036		33800	11.00	13.00	3
3046175	24ACB336A50	FY4ANF042		34400	11.00	13.00	3
3046231	24ACB336A60	*CAP**3617A**+TDR		34000	11.00	13.00	3
3046260	24ACB336A60	CAP**3614A**	58CV(A,X)070-12	33000	11.20	13.50	3
3046232	24ACB336A60	CAP**3614A**	58PH*045-08	33600	11.00	13.20	3
3046259	24ACB336A60	CAP**3614A**+TDR		33000	11.00	13.00	3
3046262	24ACB336A60	CAP**3617A**	58CV(A,X)090-16	33600	11.50	14.00	3
3124091	24ACB336A60	CAP**3617A**	58MEB040-12	34000	12.00	14.00	3
3124092	24ACB336A60	CAP**3617A**	58MEB060-12	34000	12.00	14.00	3
3124093	24ACB336A60	CAP**3617A**	58MEB080-12	34000	12.00	14.00	3
3124094	24ACB336A60	CAP**3617A**	58MEB080-16	34000	12.00	14.00	3
3046261	24ACB336A60	CAP**3617A**	58MV(B,C)060-14	33600	11.50	14.00	3
3046233	24ACB336A60	CAP**3617A**	58PH*070-16	33800	11.70	13.50	3
3046265	24ACB336A60	CAP**3621A**	58CV(A,X)110-20	33800	11.50	14.00	3
3124095	24ACB336A60	CAP**3621A**	58MEB100-20	34000	12.20	14.50	3
3046264	24ACB336A60	CAP**3621A**	58MV(B,C)080-14	33600	11.20	13.50	3
3046234	24ACB336A60	CAP**3621A**	58PH*090-16	34000	12.00	14.50	3
3046235	24ACB336A60	CAP**3621A**	58PH*110-20	34000	12.00	14.50	3
3046263	24ACB336A60	CAP**3621A**+TDR		34000	11.00	13.00	3
3046268	24ACB336A60	CAP**4221A**	58CV(A,X)110-20	34000	11.50	14.00	3
3124096	24ACB336A60	CAP**4221A**	58MEB100-20	34000	12.20	14.50	3
3046267	24ACB336A60	CAP**4221A**	58MV(B,C)080-14	33800	11.50	14.00	3
3046236	24ACB336A60	CAP**4221A**	58PH*090-16	34400	12.20	14.50	3
3046237	24ACB336A60	CAP**4221A**	58PH*110-20	34400	12.20	14.50	3
3046266	24ACB336A60	CAP**4221A**+TDR		34000	11.00	13.00	3
3046271	24ACB336A60	CAP**4224A**	58CV(A,X)135-22	34000	11.70	14.50	3
3046270	24ACB336A60	CAP**4224A**	58MV(B,C)040-14	33800	11.50	14.00	3
3046269	24ACB336A60	CAP**4224A**+TDR		34000	11.00	13.00	3
3046288	24ACB336A60	CNPF*3618A**+TDR		33800	11.00	13.00	3
3046283	24ACB336A60	CNPH*3617A**	58CV(A,X)070-12	33200	11.20	13.50	3
3124107	24ACB336A60	CNPH*3617A**	58MEB040-12	34000	12.00	14.00	3
3124108	24ACB336A60	CNPH*3617A**	58MEB060-12	34000	12.00	14.00	3
3124109	24ACB336A60	CNPH*3617A**	58MEB080-12	33800	12.00	14.00	3
3124110	24ACB336A60	CNPH*3617A**	58MEB080-16	34000	12.00	14.00	3
3124111	24ACB336A60	CNPH*3617A**	58MEB100-20	33800	12.00	14.00	3
3046282	24ACB336A60	CNPH*3617A**	58MV(B,C)040-14	33200	11.20	13.50	3
3046243	24ACB336A60	CNPH*3617A**	58PH*045-08	33600	11.00	13.20	3
3046244	24ACB336A60	CNPH*3617A**	58PH*070-16	33600	11.70	13.50	3
3046245	24ACB336A60	CNPH*3617A**	58PH*090-16	34000	12.00	14.00	3
3046246	24ACB336A60	CNPH*3617A**	58PH*110-20	34000	12.00	14.00	3
3046281	24ACB336A60	CNPH*3617A**+TDR		33800	11.00	13.00	3
3046287	24ACB336A60	CNPH*4221A**	58CV(A,X)070-12	34200	11.50	14.00	3
3124112	24ACB336A60	CNPH*4221A**	58MEB040-12	34000	12.00	14.00	3
3124113	24ACB336A60	CNPH*4221A**	58MEB060-12	34000	12.00	14.00	3
3124114	24ACB336A60	CNPH*4221A**	58MEB080-12	34000	12.00	14.00	3
3124115	24ACB336A60	CNPH*4221A**	58MEB080-16	34000	12.00	14.00	3
3124116	24ACB336A60	CNPH*4221A**	58MEB100-20	34000	12.20	14.50	3
3046285	24ACB336A60	CNPH*4221A**	58MV(B,C)040-14	34200	11.50	14.00	3
3046286	24ACB336A60	CNPH*4221A**	58MV(B,C)060-14	34400	11.50	14.00	3
3046247	24ACB336A60	CNPH*4221A**	58PH*045-08	34000	11.50	13.50	3
3046248	24ACB336A60	CNPH*4221A**	58PH*070-16	34200	11.70	14.00	3
3046249	24ACB336A60	CNPH*4221A**	58PH*090-16	34400	12.20	14.50	3
3046250	24ACB336A60	CNPH*4221A**	58PH*110-20	34400	12.20	14.50	3
3046284	24ACB336A60	CNPH*4221A**+TDR		34000	11.00	13.00	3
3046274	24ACB336A60	CNPV*3617A**	58CV(A,X)090-16	33400	11.50	14.00	3
3124097	24ACB336A60	CNPV*3617A**	58MEB040-12	34000	12.00	14.00	3
3124098	24ACB336A60	CNPV*3617A**	58MEB060-12	34000	12.00	14.00	3
3124099	24ACB336A60	CNPV*3617A**	58MEB080-12	33800	12.00	14.00	3
3124100	24ACB336A60	CNPV*3617A**	58MEB080-16	34000	12.00	14.00	3
3046273	24ACB336A60	CNPV*3617A**	58MV(B,C)060-14	33200	11.20	13.50	3
3046238	24ACB336A60	CNPV*3617A**	58PH*070-16	33600	11.70	13.50	3
3046272	24ACB336A60	CNPV*3617A**+TDR		33800	11.00	13.00	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046277	24ACB336A60	CNPV*3621A**	58CV(A,X)110-20	33800	11.20	13.50	3
3124101	24ACB336A60	CNPV*3621A**	58MEB100-20	33800	12.20	14.50	3
3046276	24ACB336A60	CNPV*3621A**	58MV(B,C)080-14	33600	11.00	13.00	3
3046239	24ACB336A60	CNPV*3621A**	58PH*090-16	34000	12.00	14.00	3
3046240	24ACB336A60	CNPV*3621A**	58PH*110-20	34000	12.00	14.00	3
3046275	24ACB336A60	CNPV*3621A**+TDR		33800	11.00	13.00	3
3124102	24ACB336A60	CNPV*4217A**	58MEB040-12	34000	12.20	14.50	3
3124103	24ACB336A60	CNPV*4217A**	58MEB060-12	34000	12.20	14.50	3
3124104	24ACB336A60	CNPV*4217A**	58MEB080-12	34000	12.20	14.50	3
3124105	24ACB336A60	CNPV*4217A**	58MEB080-16	34000	12.20	14.50	3
3046280	24ACB336A60	CNPV*4221A**	58CV(A,X)110-20	34600	11.70	14.50	3
3124106	24ACB336A60	CNPV*4221A**	58MEB100-20	34000	12.20	14.50	3
3046279	24ACB336A60	CNPV*4221A**	58MV(B,C)080-14	34200	11.50	14.00	3
3046308	24ACB336A60	CNPV*4221A**	58MV(B,C)100-20	34200	11.70	14.00	3
3046241	24ACB336A60	CNPV*4221A**	58PH*090-16	34400	12.20	14.50	3
3046242	24ACB336A60	CNPV*4221A**	58PH*110-20	34400	12.20	14.50	3
3046278	24ACB336A60	CNPV*4221A**+TDR		34000	11.00	13.00	3
3046291	24ACB336A60	CSPH*3612A**	58CV(A,X)070-12	33200	11.50	14.00	3
3124117	24ACB336A60	CSPH*3612A**	58MEB040-12	34000	12.00	14.00	3
3124118	24ACB336A60	CSPH*3612A**	58MEB060-12	34000	12.00	14.00	3
3124119	24ACB336A60	CSPH*3612A**	58MEB080-12	34000	12.00	14.00	3
3124120	24ACB336A60	CSPH*3612A**	58MEB080-16	34000	12.00	14.00	3
3124121	24ACB336A60	CSPH*3612A**	58MEB100-20	34000	12.20	14.50	3
3046290	24ACB336A60	CSPH*3612A**	58MV(B,C)040-14	33200	11.50	14.00	3
3046251	24ACB336A60	CSPH*3612A**	58PH*045-08	34000	11.70	13.50	3
3046252	24ACB336A60	CSPH*3612A**	58PH*070-16	34000	12.00	14.00	3
3046253	24ACB336A60	CSPH*3612A**	58PH*090-16	34000	12.00	14.50	3
3046254	24ACB336A60	CSPH*3612A**	58PH*110-20	34000	12.00	14.50	3
3046289	24ACB336A60	CSPH*3612A**+TDR		33600	11.00	13.00	3
3046294	24ACB336A60	CSPH*4212A**	58CV(A,X)070-12	34000	11.20	13.50	3
3124122	24ACB336A60	CSPH*4212A**	58MEB040-12	34000	12.20	14.50	3
3124123	24ACB336A60	CSPH*4212A**	58MEB060-12	34000	12.20	14.50	3
3124124	24ACB336A60	CSPH*4212A**	58MEB080-12	34000	12.20	14.50	3
3124125	24ACB336A60	CSPH*4212A**	58MEB080-16	34000	12.20	14.50	3
3124126	24ACB336A60	CSPH*4212A**	58MEB100-20	34000	12.20	14.50	3
3046293	24ACB336A60	CSPH*4212A**	58MV(B,C)040-14	33800	11.20	13.50	3
3046255	24ACB336A60	CSPH*4212A**	58PH*045-08	34400	11.70	13.50	3
3046256	24ACB336A60	CSPH*4212A**	58PH*070-16	34400	12.00	14.00	3
3046257	24ACB336A60	CSPH*4212A**	58PH*090-16	34400	12.20	14.50	3
3046258	24ACB336A60	CSPH*4212A**	58PH*110-20	34400	12.20	14.50	3
3046292	24ACB336A60	CSPH*4212A**+TDR		33800	11.20	13.20	3
3046300	24ACB336A60	FE4AN(B,F)003+UI		34000	11.70	14.50	3
3046301	24ACB336A60	FE4AN(B,F)005+UI		35000	12.00	15.00	3
3046302	24ACB336A60	FE4ANB006+UI		35400	12.00	15.00	3
3046299	24ACB336A60	FE4ANF002+UI		33600	11.50	14.00	3
3046303	24ACB336A60	FF1ENP036		33800	11.00	13.00	3
3046305	24ACB336A60	FV4BN(B,F)003		34000	11.70	14.50	3
3046306	24ACB336A60	FV4BN(B,F)005		35000	12.00	15.00	3
3046307	24ACB336A60	FV4BNB006		35400	12.00	15.00	3
3046304	24ACB336A60	FV4BNF002		33600	11.50	14.00	3
3046297	24ACB336A60	FX4CN(B,F)036		34400	11.50	14.00	3
3046298	24ACB336A60	FX4CN(B,F)042		34800	11.50	14.00	3
3046295	24ACB336A60	FY4ANF036		33800	11.00	13.00	3
3046296	24ACB336A60	FY4ANF042		34400	11.00	13.00	3
3045427	24ACB342A30	*CAP**4221A**+TDR		41000	11.00	13.00	1
3045457	24ACB342A30	CAP**4221A**	58CV(A,X)110-20	40500	11.20	13.50	1
3101566	24ACB342A30	CAP**4221A**	58MEB100-20	40500	12.00	14.00	1
3045456	24ACB342A30	CAP**4221A**	58MV(B,C)080-14	40000	11.20	13.50	1
3045428	24ACB342A30	CAP**4221A**	58PH*090-16	40500	11.70	14.00	1
3045429	24ACB342A30	CAP**4221A**	58PH*110-20	40500	12.00	14.00	1
3045460	24ACB342A30	CAP**4224A**	58CV(A,X)135-22	40500	11.50	14.00	1
3101567	24ACB342A30	CAP**4224A**	58MEB120-20	40500	12.00	14.00	1
3045459	24ACB342A30	CAP**4224A**	58MV(B,C)040-14	40000	11.20	13.50	1
3045430	24ACB342A30	CAP**4224A**	58PH*135-20	40500	11.70	14.00	1
3045458	24ACB342A30	CAP**4224A**+TDR		41000	11.00	13.00	1
3045463	24ACB342A30	CAP**4817A**	58CV(A,X)090-16	40000	11.50	14.00	1
3101568	24ACB342A30	CAP**4817A**	58MEB040-12	41000	11.70	14.00	1
3101569	24ACB342A30	CAP**4817A**	58MEB060-12	41000	11.70	13.50	1
3101570	24ACB342A30	CAP**4817A**	58MEB080-12	41000	12.00	14.00	1
3101571	24ACB342A30	CAP**4817A**	58MEB080-16	41000	12.00	14.00	1
3045462	24ACB342A30	CAP**4817A**	58MV(B,C)060-14	40000	11.50	14.00	1
3045431	24ACB342A30	CAP**4817A**	58PH*070-16	41000	11.50	13.50	1
3045461	24ACB342A30	CAP**4817A**+TDR		40000	11.00	13.20	1
3045466	24ACB342A30	CAP**4821A**	58CV(A,X)110-20	41000	11.50	14.00	1
3101572	24ACB342A30	CAP**4821A**	58MEB100-20	41000	12.00	14.00	1
3045465	24ACB342A30	CAP**4821A**	58MV(B,C)080-14	40500	11.20	13.50	1
3045432	24ACB342A30	CAP**4821A**	58PH*090-16	41000	12.00	14.00	1
3045433	24ACB342A30	CAP**4821A**	58PH*110-20	41000	12.00	14.00	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045464	24ACB342A30	CAP**4821A**+TDR		41500	11.00	13.20	1
3045469	24ACB342A30	CAP**4824A**	58CV(A,X)135-22	41000	11.70	14.50	1
3101573	24ACB342A30	CAP**4824A**	58MEB120-20	41000	12.20	14.50	1
3045468	24ACB342A30	CAP**4824A**	58MV(B,C)040-14	41000	11.20	13.50	1
3045434	24ACB342A30	CAP**4824A**	58PH*135-20	41000	12.00	14.00	1
3045467	24ACB342A30	CAP**4824A**+TDR		41500	11.00	13.20	1
3045485	24ACB342A30	CNPF*4818A**+TDR		41500	11.00	13.20	1
3045481	24ACB342A30	CNPH*4221A**	58CV(A,X)070-12	40500	11.20	13.50	1
3101581	24ACB342A30	CNPH*4221A**	58MEB040-12	40500	11.70	13.50	1
3101582	24ACB342A30	CNPH*4221A**	58MEB060-12	40500	11.50	13.50	1
3101583	24ACB342A30	CNPH*4221A**	58MEB080-12	40500	11.70	13.50	1
3101584	24ACB342A30	CNPH*4221A**	58MEB080-16	40000	11.70	13.50	1
3101585	24ACB342A30	CNPH*4221A**	58MEB100-20	40500	12.00	14.00	1
3101586	24ACB342A30	CNPH*4221A**	58MEB120-20	40500	12.00	14.00	1
3045480	24ACB342A30	CNPH*4221A**	58MV(B,C)040-14	40000	11.20	13.50	1
3045440	24ACB342A30	CNPH*4221A**	58PH*070-16	40000	11.00	13.00	1
3045441	24ACB342A30	CNPH*4221A**	58PH*090-16	40500	11.70	14.00	1
3045442	24ACB342A30	CNPH*4221A**	58PH*110-20	40500	11.70	14.00	1
3045443	24ACB342A30	CNPH*4221A**	58PH*135-20	40500	11.70	14.00	1
3045479	24ACB342A30	CNPH*4221A**+TDR		41000	11.00	13.00	1
3045484	24ACB342A30	CNPH*4821A**	58CV(A,X)070-12	41000	11.20	13.50	1
3101587	24ACB342A30	CNPH*4821A**	58MEB040-12	41000	11.70	14.00	1
3101588	24ACB342A30	CNPH*4821A**	58MEB060-12	41000	11.70	13.50	1
3101589	24ACB342A30	CNPH*4821A**	58MEB080-12	41000	12.00	14.00	1
3101590	24ACB342A30	CNPH*4821A**	58MEB080-16	41000	12.00	14.00	1
3101591	24ACB342A30	CNPH*4821A**	58MEB100-20	41000	12.00	14.00	1
3101592	24ACB342A30	CNPH*4821A**	58MEB120-20	41000	12.20	14.50	1
3045483	24ACB342A30	CNPH*4821A**	58MV(B,C)040-14	40500	11.20	13.50	1
3045444	24ACB342A30	CNPH*4821A**	58PH*070-16	41000	11.50	13.50	1
3045445	24ACB342A30	CNPH*4821A**	58PH*090-16	41000	12.00	14.00	1
3045446	24ACB342A30	CNPH*4821A**	58PH*110-20	41000	12.00	14.00	1
3045447	24ACB342A30	CNPH*4821A**	58PH*135-20	41000	12.00	14.00	1
3045482	24ACB342A30	CNPH*4821A**+TDR		41500	11.00	13.20	1
3101574	24ACB342A30	CNPV*4217A**	58MEB040-12	40500	11.70	13.50	1
3101575	24ACB342A30	CNPV*4217A**	58MEB060-12	40500	11.70	13.50	1
3101576	24ACB342A30	CNPV*4217A**	58MEB080-12	40500	11.70	13.50	1
3101577	24ACB342A30	CNPV*4217A**	58MEB080-16	40500	11.70	13.50	1
3045472	24ACB342A30	CNPV*4221A**	58CV(A,X)110-20	40000	11.50	14.00	1
3101578	24ACB342A30	CNPV*4221A**	58MEB100-20	40500	12.00	14.00	1
3045471	24ACB342A30	CNPV*4221A**	58MV(B,C)080-14	40000	11.20	13.50	1
3045435	24ACB342A30	CNPV*4221A**	58PH*090-16	40500	11.70	14.00	1
3045436	24ACB342A30	CNPV*4221A**	58PH*110-20	40500	11.70	14.00	1
3045470	24ACB342A30	CNPV*4221A**+TDR		41000	11.00	13.00	1
3045475	24ACB342A30	CNPV*4821A**	58CV(A,X)110-20	41000	11.50	14.00	1
3101579	24ACB342A30	CNPV*4821A**	58MEB100-20	41000	12.00	14.00	1
3045474	24ACB342A30	CNPV*4821A**	58MV(B,C)080-14	40500	11.20	13.50	1
3045437	24ACB342A30	CNPV*4821A**	58PH*090-16	41000	12.00	14.00	1
3045438	24ACB342A30	CNPV*4821A**	58PH*110-20	41000	12.00	14.00	1
3045473	24ACB342A30	CNPV*4821A**+TDR		40500	11.00	13.20	1
3045478	24ACB342A30	CNPV*4824A**	58CV(A,X)135-22	40500	11.70	14.50	1
3101580	24ACB342A30	CNPV*4824A**	58MEB120-20	41000	12.20	14.50	1
3045477	24ACB342A30	CNPV*4824A**	58MV(B,C)040-14	41000	11.20	13.50	1
3045439	24ACB342A30	CNPV*4824A**	58PH*135-20	41000	12.00	14.00	1
3045476	24ACB342A30	CNPV*4824A**+TDR		41500	11.00	13.20	1
3045488	24ACB342A30	CSPH*4212A**	58CV(A,X)070-12	40000	11.20	13.50	1
3101593	24ACB342A30	CSPH*4212A**	58MEB040-12	40500	11.70	13.50	1
3101594	24ACB342A30	CSPH*4212A**	58MEB060-12	40500	11.70	13.50	1
3101595	24ACB342A30	CSPH*4212A**	58MEB080-12	40500	11.70	13.50	1
3101596	24ACB342A30	CSPH*4212A**	58MEB080-16	40500	11.70	13.50	1
3101597	24ACB342A30	CSPH*4212A**	58MEB100-20	40500	12.00	14.00	1
3101598	24ACB342A30	CSPH*4212A**	58MEB120-20	40500	12.00	14.00	1
3045487	24ACB342A30	CSPH*4212A**	58MV(B,C)040-14	40000	11.20	13.50	1
3045448	24ACB342A30	CSPH*4212A**	58PH*070-16	41000	11.50	13.50	1
3045449	24ACB342A30	CSPH*4212A**	58PH*090-16	41000	12.00	14.00	1
3045450	24ACB342A30	CSPH*4212A**	58PH*110-20	41000	12.00	14.00	1
3045451	24ACB342A30	CSPH*4212A**	58PH*135-20	41000	12.00	14.00	1
3045486	24ACB342A30	CSPH*4212A**+TDR		40500	11.00	13.20	1
3045491	24ACB342A30	CSPH*4812A**	58CV(A,X)070-12	40000	11.20	13.50	1
3101599	24ACB342A30	CSPH*4812A**	58MEB040-12	41000	12.00	14.00	1
3101600	24ACB342A30	CSPH*4812A**	58MEB060-12	41000	11.70	13.50	1
3101601	24ACB342A30	CSPH*4812A**	58MEB080-12	41000	12.00	14.00	1
3101602	24ACB342A30	CSPH*4812A**	58MEB080-16	41000	12.00	14.00	1
3101603	24ACB342A30	CSPH*4812A**	58MEB100-20	41000	12.00	14.00	1
3101604	24ACB342A30	CSPH*4812A**	58MEB120-20	41000	12.20	14.50	1
3045490	24ACB342A30	CSPH*4812A**	58MV(B,C)040-14	40000	11.20	13.50	1
3045452	24ACB342A30	CSPH*4812A**	58PH*070-16	41000	11.50	13.50	1
3045453	24ACB342A30	CSPH*4812A**	58PH*090-16	41500	12.00	14.00	1
3045454	24ACB342A30	CSPH*4812A**	58PH*110-20	41500	12.00	14.00	1
3045455	24ACB342A30	CSPH*4812A**	58PH*135-20	41500	12.00	14.00	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045489	24ACB342A30	CSPH*4812A**+TDR		41000	11.00	13.20	1
3045496	24ACB342A30	FE4AN(B,F)003+UI		40500	11.50	14.00	1
3045497	24ACB342A30	FE4AN(B,F)005+UI		42000	11.70	14.50	1
3045498	24ACB342A30	FE4ANB006+UI		42500	12.00	15.00	1
3045499	24ACB342A30	FV4BN(B,F)003		40500	11.50	14.00	1
3045500	24ACB342A30	FV4BN(B,F)005		41500	11.70	14.50	1
3045501	24ACB342A30	FV4BNB006		42500	12.00	15.00	1
3045494	24ACB342A30	FX4CN(B,F)042		41500	11.20	13.50	1
3045495	24ACB342A30	FX4CN(B,F)048		42500	11.50	14.00	1
3045492	24ACB342A30	FY4ANF042		41000	11.00	13.00	1
3045493	24ACB342A30	FY4ANF048		42000	11.00	13.20	1
3046309	24ACB342A50	*CAP**4221A**+TDR		41000	11.00	13.00	3
3046339	24ACB342A50	CAP**4221A**	58CV(A,X)110-20	40500	11.20	13.50	3
3124023	24ACB342A50	CAP**4221A**	58MEB100-20	40500	12.00	14.00	3
3046338	24ACB342A50	CAP**4221A**	58MV(B,C)080-14	40000	11.20	13.50	3
3046310	24ACB342A50	CAP**4221A**	58PH*090-16	40500	11.70	14.00	3
3046311	24ACB342A50	CAP**4221A**	58PH*110-20	40500	12.00	14.00	3
3046342	24ACB342A50	CAP**4224A**	58CV(A,X)135-22	40500	11.50	14.00	3
3124024	24ACB342A50	CAP**4224A**	58MEB120-20	40500	12.00	14.00	3
3046341	24ACB342A50	CAP**4224A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046312	24ACB342A50	CAP**4224A**	58PH*135-20	40500	11.70	14.00	3
3046340	24ACB342A50	CAP**4224A**+TDR		41000	11.00	13.00	3
3046345	24ACB342A50	CAP**4817A**	58CV(A,X)090-16	40000	11.50	14.00	3
3124025	24ACB342A50	CAP**4817A**	58MEB040-12	41000	11.70	14.00	3
3124026	24ACB342A50	CAP**4817A**	58MEB060-12	41000	11.70	13.50	3
3124027	24ACB342A50	CAP**4817A**	58MEB080-12	41000	12.00	14.00	3
3124028	24ACB342A50	CAP**4817A**	58MEB080-16	41000	12.00	14.00	3
3046344	24ACB342A50	CAP**4817A**	58MV(B,C)060-14	40000	11.50	14.00	3
3046313	24ACB342A50	CAP**4817A**	58PH*070-16	41000	11.50	13.50	3
3046343	24ACB342A50	CAP**4817A**+TDR		40000	11.00	13.20	3
3046348	24ACB342A50	CAP**4821A**	58CV(A,X)110-20	41000	11.50	14.00	3
3124029	24ACB342A50	CAP**4821A**	58MEB100-20	41000	12.00	14.00	3
3046347	24ACB342A50	CAP**4821A**	58MV(B,C)080-14	40500	11.20	13.50	3
3046314	24ACB342A50	CAP**4821A**	58PH*090-16	41000	12.00	14.00	3
3046315	24ACB342A50	CAP**4821A**	58PH*110-20	41000	12.00	14.00	3
3046346	24ACB342A50	CAP**4821A**+TDR		41500	11.00	13.20	3
3046351	24ACB342A50	CAP**4824A**	58CV(A,X)135-22	41000	11.70	14.50	3
3124030	24ACB342A50	CAP**4824A**	58MEB120-20	41000	12.20	14.50	3
3046350	24ACB342A50	CAP**4824A**	58MV(B,C)040-14	41000	11.20	13.50	3
3046316	24ACB342A50	CAP**4824A**	58PH*135-20	41000	12.00	14.00	3
3046349	24ACB342A50	CAP**4824A**+TDR		41500	11.00	13.20	3
3046367	24ACB342A50	CNPF*4818A**+TDR		41500	11.00	13.20	3
3046363	24ACB342A50	CNPH*4221A**	58CV(A,X)070-12	40500	11.20	13.50	3
3124038	24ACB342A50	CNPH*4221A**	58MEB040-12	40500	11.70	13.50	3
3124039	24ACB342A50	CNPH*4221A**	58MEB060-12	40500	11.50	13.50	3
3124040	24ACB342A50	CNPH*4221A**	58MEB080-12	40500	11.70	13.50	3
3124041	24ACB342A50	CNPH*4221A**	58MEB080-16	40000	11.70	13.50	3
3124042	24ACB342A50	CNPH*4221A**	58MEB100-20	40500	12.00	14.00	3
3124043	24ACB342A50	CNPH*4221A**	58MEB120-20	40500	12.00	14.00	3
3046362	24ACB342A50	CNPH*4221A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046322	24ACB342A50	CNPH*4221A**	58PH*070-16	40000	11.00	13.00	3
3046323	24ACB342A50	CNPH*4221A**	58PH*090-16	40500	11.70	14.00	3
3046324	24ACB342A50	CNPH*4221A**	58PH*110-20	40500	11.70	14.00	3
3046325	24ACB342A50	CNPH*4221A**	58PH*135-20	40500	11.70	14.00	3
3046361	24ACB342A50	CNPH*4221A**+TDR		41000	11.00	13.00	3
3046366	24ACB342A50	CNPH*4821A**	58CV(A,X)070-12	41000	11.20	13.50	3
3124044	24ACB342A50	CNPH*4821A**	58MEB040-12	41000	11.70	14.00	3
3124045	24ACB342A50	CNPH*4821A**	58MEB060-12	41000	11.70	13.50	3
3124046	24ACB342A50	CNPH*4821A**	58MEB080-12	41000	12.00	14.00	3
3124047	24ACB342A50	CNPH*4821A**	58MEB080-16	41000	12.00	14.00	3
3124048	24ACB342A50	CNPH*4821A**	58MEB100-20	41000	12.00	14.00	3
3124049	24ACB342A50	CNPH*4821A**	58MEB120-20	41000	12.20	14.50	3
3046365	24ACB342A50	CNPH*4821A**	58MV(B,C)040-14	40500	11.20	13.50	3
3046326	24ACB342A50	CNPH*4821A**	58PH*070-16	41000	11.50	13.50	3
3046327	24ACB342A50	CNPH*4821A**	58PH*090-16	41000	12.00	14.00	3
3046328	24ACB342A50	CNPH*4821A**	58PH*110-20	41000	12.00	14.00	3
3046329	24ACB342A50	CNPH*4821A**	58PH*135-20	41000	12.00	14.00	3
3046364	24ACB342A50	CNPH*4821A**+TDR		41500	11.00	13.20	3
3124031	24ACB342A50	CNPV*4217A**	58MEB040-12	40500	11.70	13.50	3
3124032	24ACB342A50	CNPV*4217A**	58MEB060-12	40500	11.70	13.50	3
3124033	24ACB342A50	CNPV*4217A**	58MEB080-12	40500	11.70	13.50	3
3124034	24ACB342A50	CNPV*4217A**	58MEB080-16	40500	11.70	13.50	3
3046354	24ACB342A50	CNPV*4221A**	58CV(A,X)110-20	40000	11.50	14.00	3
3124035	24ACB342A50	CNPV*4221A**	58MEB100-20	40500	12.00	14.00	3
3046353	24ACB342A50	CNPV*4221A**	58MV(B,C)080-14	40000	11.20	13.50	3
3046317	24ACB342A50	CNPV*4221A**	58PH*090-16	40500	11.70	14.00	3
3046318	24ACB342A50	CNPV*4221A**	58PH*110-20	40500	11.70	14.00	3
3046352	24ACB342A50	CNPV*4221A**+TDR		41000	11.00	13.00	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046357	24ACB342A50	CNPV*4821A**	58CV(A,X)110-20	41000	11.50	14.00	3
3124036	24ACB342A50	CNPV*4821A**	58MEB100-20	41000	12.00	14.00	3
3046356	24ACB342A50	CNPV*4821A**	58MV(B,C)080-14	40500	11.20	13.50	3
3046319	24ACB342A50	CNPV*4821A**	58PH*090-16	41000	12.00	14.00	3
3046320	24ACB342A50	CNPV*4821A**	58PH*110-20	41000	12.00	14.00	3
3046355	24ACB342A50	CNPV*4821A**+TDR		40500	11.00	13.20	3
3046360	24ACB342A50	CNPV*4824A**	58CV(A,X)135-22	40500	11.70	14.50	3
3124037	24ACB342A50	CNPV*4824A**	58MEB120-20	41000	12.20	14.50	3
3046359	24ACB342A50	CNPV*4824A**	58MV(B,C)040-14	41000	11.20	13.50	3
3046321	24ACB342A50	CNPV*4824A**	58PH*135-20	41000	12.00	14.00	3
3046358	24ACB342A50	CNPV*4824A**+TDR		41500	11.00	13.20	3
3046370	24ACB342A50	CSPH*4212A**	58CV(A,X)070-12	40000	11.20	13.50	3
3124050	24ACB342A50	CSPH*4212A**	58MEB040-12	40500	11.70	13.50	3
3124051	24ACB342A50	CSPH*4212A**	58MEB060-12	40500	11.70	13.50	3
3124052	24ACB342A50	CSPH*4212A**	58MEB080-12	40500	11.70	13.50	3
3124053	24ACB342A50	CSPH*4212A**	58MEB080-16	40500	11.70	13.50	3
3124054	24ACB342A50	CSPH*4212A**	58MEB100-20	40500	12.00	14.00	3
3124055	24ACB342A50	CSPH*4212A**	58MEB120-20	40500	12.00	14.00	3
3046369	24ACB342A50	CSPH*4212A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046330	24ACB342A50	CSPH*4212A**	58PH*070-16	41000	11.50	13.50	3
3046331	24ACB342A50	CSPH*4212A**	58PH*090-16	41000	12.00	14.00	3
3046332	24ACB342A50	CSPH*4212A**	58PH*110-20	41000	12.00	14.00	3
3046333	24ACB342A50	CSPH*4212A**	58PH*135-20	41000	12.00	14.00	3
3046368	24ACB342A50	CSPH*4212A**+TDR		40500	11.00	13.20	3
3046373	24ACB342A50	CSPH*4812A**	58CV(A,X)070-12	40000	11.20	13.50	3
3124056	24ACB342A50	CSPH*4812A**	58MEB040-12	41000	12.00	14.00	3
3124057	24ACB342A50	CSPH*4812A**	58MEB060-12	41000	11.70	13.50	3
3124058	24ACB342A50	CSPH*4812A**	58MEB080-12	41000	12.00	14.00	3
3124059	24ACB342A50	CSPH*4812A**	58MEB080-16	41000	12.00	14.00	3
3124060	24ACB342A50	CSPH*4812A**	58MEB100-20	41000	12.00	14.00	3
3124061	24ACB342A50	CSPH*4812A**	58MEB120-20	41000	12.20	14.50	3
3046372	24ACB342A50	CSPH*4812A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046334	24ACB342A50	CSPH*4812A**	58PH*070-16	41000	11.50	13.50	3
3046335	24ACB342A50	CSPH*4812A**	58PH*090-16	41500	12.00	14.00	3
3046336	24ACB342A50	CSPH*4812A**	58PH*110-20	41500	12.00	14.00	3
3046337	24ACB342A50	CSPH*4812A**	58PH*135-20	41500	12.00	14.00	3
3046371	24ACB342A50	CSPH*4812A**+TDR		41000	11.00	13.20	3
3046378	24ACB342A50	FE4AN(B,F)003+UI		40500	11.50	14.00	3
3046379	24ACB342A50	FE4AN(B,F)005+UI		42000	11.70	14.50	3
3046380	24ACB342A50	FE4ANB006+UI		42500	12.00	15.00	3
3046381	24ACB342A50	FV4BN(B,F)003		40500	11.50	14.00	3
3046382	24ACB342A50	FV4BN(B,F)005		41500	11.70	14.50	3
3046383	24ACB342A50	FV4BNB006		42500	12.00	15.00	3
3046376	24ACB342A50	FX4CN(B,F)042		41500	11.20	13.50	3
3046377	24ACB342A50	FX4CN(B,F)048		42500	11.50	14.00	3
3046374	24ACB342A50	FY4ANF042		41000	11.00	13.00	3
3046375	24ACB342A50	FY4ANF048		42000	11.00	13.20	3
3046384	24ACB342A60	*CAP**4221A**+TDR		41000	11.00	13.00	3
3046414	24ACB342A60	CAP**4221A**	58CV(A,X)110-20	40500	11.20	13.50	3
3124127	24ACB342A60	CAP**4221A**	58MEB100-20	40500	12.00	14.00	3
3046413	24ACB342A60	CAP**4221A**	58MV(B,C)080-14	40000	11.20	13.50	3
3046385	24ACB342A60	CAP**4221A**	58PH*090-16	40500	11.70	14.00	3
3046386	24ACB342A60	CAP**4221A**	58PH*110-20	40500	12.00	14.00	3
3046417	24ACB342A60	CAP**4224A**	58CV(A,X)135-22	40500	11.50	14.00	3
3124128	24ACB342A60	CAP**4224A**	58MEB120-20	40500	12.00	14.00	3
3046416	24ACB342A60	CAP**4224A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046387	24ACB342A60	CAP**4224A**	58PH*135-20	40500	11.70	14.00	3
3046415	24ACB342A60	CAP**4224A**+TDR		41000	11.00	13.00	3
3046420	24ACB342A60	CAP**4817A**	58CV(A,X)090-16	40000	11.50	14.00	3
3124129	24ACB342A60	CAP**4817A**	58MEB040-12	41000	11.70	14.00	3
3124130	24ACB342A60	CAP**4817A**	58MEB060-12	41000	11.70	13.50	3
3124131	24ACB342A60	CAP**4817A**	58MEB080-12	41000	12.00	14.00	3
3124132	24ACB342A60	CAP**4817A**	58MEB080-16	41000	12.00	14.00	3
3046419	24ACB342A60	CAP**4817A**	58MV(B,C)060-14	40000	11.50	14.00	3
3046388	24ACB342A60	CAP**4817A**	58PH*070-16	41000	11.50	13.50	3
3046418	24ACB342A60	CAP**4817A**+TDR		40000	11.00	13.20	3
3046423	24ACB342A60	CAP**4821A**	58CV(A,X)110-20	41000	11.50	14.00	3
3124133	24ACB342A60	CAP**4821A**	58MEB100-20	41000	12.00	14.00	3
3046422	24ACB342A60	CAP**4821A**	58MV(B,C)080-14	40500	11.20	13.50	3
3046389	24ACB342A60	CAP**4821A**	58PH*090-16	41000	12.00	14.00	3
3046390	24ACB342A60	CAP**4821A**	58PH*110-20	41000	12.00	14.00	3
3046421	24ACB342A60	CAP**4821A**+TDR		41500	11.00	13.20	3
3046426	24ACB342A60	CAP**4824A**	58CV(A,X)135-22	41000	11.70	14.50	3
3124134	24ACB342A60	CAP**4824A**	58MEB120-20	41000	12.20	14.50	3
3046425	24ACB342A60	CAP**4824A**	58MV(B,C)040-14	41000	11.20	13.50	3
3046391	24ACB342A60	CAP**4824A**	58PH*135-20	41000	12.00	14.00	3
3046424	24ACB342A60	CAP**4824A**+TDR		41500	11.00	13.20	3
3046442	24ACB342A60	CNPF*4818A**+TDR		41500	11.00	13.20	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046438	24ACB342A60	CNPH*4221A**	58CV(A,X)070-12	40500	11.20	13.50	3
3124142	24ACB342A60	CNPH*4221A**	58MEB040-12	40500	11.70	13.50	3
3124143	24ACB342A60	CNPH*4221A**	58MEB060-12	40500	11.50	13.50	3
3124144	24ACB342A60	CNPH*4221A**	58MEB080-12	40500	11.70	13.50	3
3124145	24ACB342A60	CNPH*4221A**	58MEB080-16	40000	11.70	13.50	3
3124146	24ACB342A60	CNPH*4221A**	58MEB100-20	40500	12.00	14.00	3
3124147	24ACB342A60	CNPH*4221A**	58MEB120-20	40500	12.00	14.00	3
3046437	24ACB342A60	CNPH*4221A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046397	24ACB342A60	CNPH*4221A**	58PH*070-16	40000	11.00	13.00	3
3046398	24ACB342A60	CNPH*4221A**	58PH*090-16	40500	11.70	14.00	3
3046399	24ACB342A60	CNPH*4221A**	58PH*110-20	40500	11.70	14.00	3
3046400	24ACB342A60	CNPH*4221A**	58PH*135-20	40500	11.70	14.00	3
3046436	24ACB342A60	CNPH*4221A**+TDR		41000	11.00	13.00	3
3046441	24ACB342A60	CNPH*4821A**	58CV(A,X)070-12	41000	11.20	13.50	3
3124148	24ACB342A60	CNPH*4821A**	58MEB040-12	41000	11.70	14.00	3
3124149	24ACB342A60	CNPH*4821A**	58MEB060-12	41000	11.70	13.50	3
3124150	24ACB342A60	CNPH*4821A**	58MEB080-12	41000	12.00	14.00	3
3124151	24ACB342A60	CNPH*4821A**	58MEB080-16	41000	12.00	14.00	3
3124152	24ACB342A60	CNPH*4821A**	58MEB100-20	41000	12.00	14.00	3
3124153	24ACB342A60	CNPH*4821A**	58MEB120-20	41000	12.20	14.50	3
3046440	24ACB342A60	CNPH*4821A**	58MV(B,C)040-14	40500	11.20	13.50	3
3046401	24ACB342A60	CNPH*4821A**	58PH*070-16	41000	11.50	13.50	3
3046402	24ACB342A60	CNPH*4821A**	58PH*090-16	41000	12.00	14.00	3
3046403	24ACB342A60	CNPH*4821A**	58PH*110-20	41000	12.00	14.00	3
3046404	24ACB342A60	CNPH*4821A**	58PH*135-20	41000	12.00	14.00	3
3046439	24ACB342A60	CNPH*4821A**+TDR		41500	11.00	13.20	3
3124135	24ACB342A60	CNPV*4217A**	58MEB040-12	40500	11.70	13.50	3
3124136	24ACB342A60	CNPV*4217A**	58MEB060-12	40500	11.70	13.50	3
3124137	24ACB342A60	CNPV*4217A**	58MEB080-12	40500	11.70	13.50	3
3124138	24ACB342A60	CNPV*4217A**	58MEB080-16	40500	11.70	13.50	3
3046429	24ACB342A60	CNPV*4221A**	58CV(A,X)110-20	40000	11.50	14.00	3
3124139	24ACB342A60	CNPV*4221A**	58MEB100-20	40500	12.00	14.00	3
3046428	24ACB342A60	CNPV*4221A**	58MV(B,C)080-14	40000	11.20	13.50	3
3046392	24ACB342A60	CNPV*4221A**	58PH*090-16	40500	11.70	14.00	3
3046393	24ACB342A60	CNPV*4221A**	58PH*110-20	40500	11.70	14.00	3
3046427	24ACB342A60	CNPV*4221A**+TDR		41000	11.00	13.00	3
3046432	24ACB342A60	CNPV*4821A**	58CV(A,X)110-20	41000	11.50	14.00	3
3124140	24ACB342A60	CNPV*4821A**	58MEB100-20	41000	12.00	14.00	3
3046431	24ACB342A60	CNPV*4821A**	58MV(B,C)080-14	40500	11.20	13.50	3
3046394	24ACB342A60	CNPV*4821A**	58PH*090-16	41000	12.00	14.00	3
3046395	24ACB342A60	CNPV*4821A**	58PH*110-20	41000	12.00	14.00	3
3046430	24ACB342A60	CNPV*4821A**+TDR		40500	11.00	13.20	3
3046435	24ACB342A60	CNPV*4824A**	58CV(A,X)135-22	40500	11.70	14.50	3
3124141	24ACB342A60	CNPV*4824A**	58MEB120-20	41000	12.20	14.50	3
3046434	24ACB342A60	CNPV*4824A**	58MV(B,C)040-14	41000	11.20	13.50	3
3046396	24ACB342A60	CNPV*4824A**	58PH*135-20	41000	12.00	14.00	3
3046433	24ACB342A60	CNPV*4824A**+TDR		41500	11.00	13.20	3
3046445	24ACB342A60	CSPH*4212A**	58CV(A,X)070-12	40000	11.20	13.50	3
3124154	24ACB342A60	CSPH*4212A**	58MEB040-12	40500	11.70	13.50	3
3124155	24ACB342A60	CSPH*4212A**	58MEB060-12	40500	11.70	13.50	3
3124156	24ACB342A60	CSPH*4212A**	58MEB080-12	40500	11.70	13.50	3
3124157	24ACB342A60	CSPH*4212A**	58MEB080-16	40500	11.70	13.50	3
3124158	24ACB342A60	CSPH*4212A**	58MEB100-20	40500	12.00	14.00	3
3124159	24ACB342A60	CSPH*4212A**	58MEB120-20	40500	12.00	14.00	3
3046444	24ACB342A60	CSPH*4212A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046405	24ACB342A60	CSPH*4212A**	58PH*070-16	41000	11.50	13.50	3
3046406	24ACB342A60	CSPH*4212A**	58PH*090-16	41000	12.00	14.00	3
3046407	24ACB342A60	CSPH*4212A**	58PH*110-20	41000	12.00	14.00	3
3046408	24ACB342A60	CSPH*4212A**	58PH*135-20	41000	12.00	14.00	3
3046443	24ACB342A60	CSPH*4212A**+TDR		40500	11.00	13.20	3
3046448	24ACB342A60	CSPH*4812A**	58CV(A,X)070-12	40000	11.20	13.50	3
3124160	24ACB342A60	CSPH*4812A**	58MEB040-12	41000	12.00	14.00	3
3124161	24ACB342A60	CSPH*4812A**	58MEB060-12	41000	11.70	13.50	3
3124162	24ACB342A60	CSPH*4812A**	58MEB080-12	41000	12.00	14.00	3
3124163	24ACB342A60	CSPH*4812A**	58MEB080-16	41000	12.00	14.00	3
3124164	24ACB342A60	CSPH*4812A**	58MEB100-20	41000	12.00	14.00	3
3124165	24ACB342A60	CSPH*4812A**	58MEB120-20	41000	12.20	14.50	3
3046447	24ACB342A60	CSPH*4812A**	58MV(B,C)040-14	40000	11.20	13.50	3
3046409	24ACB342A60	CSPH*4812A**	58PH*070-16	41000	11.50	13.50	3
3046410	24ACB342A60	CSPH*4812A**	58PH*090-16	41500	12.00	14.00	3
3046411	24ACB342A60	CSPH*4812A**	58PH*110-20	41500	12.00	14.00	3
3046412	24ACB342A60	CSPH*4812A**	58PH*135-20	41500	12.00	14.00	3
3046446	24ACB342A60	CSPH*4812A**+TDR		41000	11.00	13.20	3
3046453	24ACB342A60	FE4AN(B,F)003+UI		40500	11.50	14.00	3
3046454	24ACB342A60	FE4AN(B,F)005+UI		42000	11.70	14.50	3
3046455	24ACB342A60	FE4ANB006+UI		42500	12.00	15.00	3
3046456	24ACB342A60	FV4BN(B,F)003		40500	11.50	14.00	3
3046457	24ACB342A60	FV4BN(B,F)005		41500	11.70	14.50	3
3046458	24ACB342A60	FV4BNB006		42500	12.00	15.00	3

24ACB3

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046451	24ACB342A60	FX4CN(B,F)042		41500	11.20	13.50	3
3046452	24ACB342A60	FX4CN(B,F)048		42500	11.50	14.00	3
3046449	24ACB342A60	FY4ANF042		41000	11.00	13.00	3
3046450	24ACB342A60	FY4ANF048		42000	11.00	13.20	3
3045502	24ACB348A30	*CAP**4821A**+TDR		46000	11.00	13.00	1
3045528	24ACB348A30	CAP**4817A**	58CV(A,X)090-16	45500	11.20	13.50	1
3101605	24ACB348A30	CAP**4817A**	58MEB080-16	45500	11.20	13.20	1
3045527	24ACB348A30	CAP**4817A**+TDR		45500	11.00	13.00	1
3045531	24ACB348A30	CAP**4821A**	58CV(A,X)110-20	45000	11.20	13.50	1
3101606	24ACB348A30	CAP**4821A**	58MEB100-20	45000	11.50	13.50	1
3045529	24ACB348A30	CAP**4821A**	58MV(B,C)080-20	45000	11.00	13.20	1
3045530	24ACB348A30	CAP**4821A**	58MV(B,C)100-20	45000	11.40	13.65	1
3045503	24ACB348A30	CAP**4821A**	58PH*090-16	45000	11.50	13.50	1
3045504	24ACB348A30	CAP**4821A**	58PH*110-20	45000	11.70	13.50	1
3045534	24ACB348A30	CAP**4824A**	58CV(A,X)135-22	45500	11.20	13.50	1
3101607	24ACB348A30	CAP**4824A**	58MEB120-20	45500	11.50	13.50	1
3045533	24ACB348A30	CAP**4824A**	58MV(B,C)120-20	45000	11.20	13.50	1
3045505	24ACB348A30	CAP**4824A**	58PH*135-20	45000	11.20	13.50	1
3045532	24ACB348A30	CAP**4824A**+TDR		46000	11.00	13.00	1
3045537	24ACB348A30	CAP**6021A**	58CV(A,X)110-20	47500	11.20	13.50	1
3101608	24ACB348A30	CAP**6021A**	58MEB100-20	46000	11.70	14.00	1
3045536	24ACB348A30	CAP**6021A**	58MV(B,C)080-20	46000	11.20	13.50	1
3045506	24ACB348A30	CAP**6021A**	58PH*090-16	46500	11.70	13.50	1
3045507	24ACB348A30	CAP**6021A**	58PH*110-20	46500	12.00	14.00	1
3045535	24ACB348A30	CAP**6021A**+TDR		47000	11.00	13.20	1
3045540	24ACB348A30	CAP**6024A**	58CV(A,X)135-22	46500	11.50	14.00	1
3101609	24ACB348A30	CAP**6024A**	58MEB120-20	46000	11.70	14.00	1
3045539	24ACB348A30	CAP**6024A**	58MV(B,C)120-20	46000	11.50	14.00	1
3045508	24ACB348A30	CAP**6024A**	58PH*135-20	46000	11.70	14.00	1
3045538	24ACB348A30	CAP**6024A**+TDR		47000	11.00	13.20	1
3045563	24ACB348A30	CNPF*4818A**+TDR		45000	11.00	13.00	1
3045556	24ACB348A30	CNPH*4821A**	58CV(A,X)090-16	45000	11.20	13.50	1
3045557	24ACB348A30	CNPH*4821A**	58CV(A,X)110-20	45500	11.20	13.50	1
3101613	24ACB348A30	CNPH*4821A**	58MEB080-16	45500	11.20	13.20	1
3101614	24ACB348A30	CNPH*4821A**	58MEB100-20	45000	11.50	13.50	1
3101615	24ACB348A30	CNPH*4821A**	58MEB120-20	45500	11.50	13.50	1
3045554	24ACB348A30	CNPH*4821A**	58MV(B,C)080-20	45000	11.00	13.20	1
3045555	24ACB348A30	CNPH*4821A**	58MV(B,C)100-20	45000	11.20	13.50	1
3045513	24ACB348A30	CNPH*4821A**	58PH*090-16	45500	11.50	13.50	1
3045514	24ACB348A30	CNPH*4821A**	58PH*110-20	45500	11.70	13.50	1
3045515	24ACB348A30	CNPH*4821A**	58PH*135-20	45500	11.50	13.20	1
3045553	24ACB348A30	CNPH*4821A**+TDR		46000	11.00	13.00	1
3045561	24ACB348A30	CNPH*6024A**	58CV(A,X)090-16	46000	11.20	13.50	1
3045562	24ACB348A30	CNPH*6024A**	58CV(A,X)110-20	46000	11.20	13.50	1
3101616	24ACB348A30	CNPH*6024A**	58MEB080-16	46000	11.50	13.50	1
3101617	24ACB348A30	CNPH*6024A**	58MEB100-20	46000	11.70	14.00	1
3101618	24ACB348A30	CNPH*6024A**	58MEB120-20	46000	11.70	14.00	1
3045559	24ACB348A30	CNPH*6024A**	58MV(B,C)080-20	46000	11.20	13.50	1
3045560	24ACB348A30	CNPH*6024A**	58MV(B,C)100-20	46000	11.20	13.50	1
3045516	24ACB348A30	CNPH*6024A**	58PH*070-16	45500	11.00	13.00	1
3045517	24ACB348A30	CNPH*6024A**	58PH*090-16	46000	11.70	13.50	1
3045518	24ACB348A30	CNPH*6024A**	58PH*110-20	46000	11.70	14.00	1
3045519	24ACB348A30	CNPH*6024A**	58PH*135-20	46000	11.70	14.00	1
3045558	24ACB348A30	CNPH*6024A**+TDR		47000	11.00	13.20	1
3045543	24ACB348A30	CNPV*4221A**	58CV(A,X)110-20	44500	11.20	13.50	1
3045542	24ACB348A30	CNPV*4221A**	58MV(B,C)080-20	44500	11.00	13.20	1
3045541	24ACB348A30	CNPV*4221A**+TDR		44500	10.95	13.00	1
3045546	24ACB348A30	CNPV*4821A**	58CV(A,X)110-20	45000	11.20	13.50	1
3101610	24ACB348A30	CNPV*4821A**	58MEB100-20	45000	11.50	13.50	1
3045545	24ACB348A30	CNPV*4821A**	58MV(B,C)080-20	45000	11.00	13.20	1
3045509	24ACB348A30	CNPV*4821A**	58PH*090-16	45500	11.50	13.50	1
3045510	24ACB348A30	CNPV*4821A**	58PH*110-20	45500	11.70	13.50	1
3045544	24ACB348A30	CNPV*4821A**+TDR		46000	11.00	13.00	1
3045549	24ACB348A30	CNPV*4824A**	58CV(A,X)135-22	45500	11.20	13.50	1
3101611	24ACB348A30	CNPV*4824A**	58MEB120-20	45500	11.50	13.50	1
3045548	24ACB348A30	CNPV*4824A**	58MV(B,C)120-20	45500	11.20	13.50	1
3045511	24ACB348A30	CNPV*4824A**	58PH*135-20	45500	11.20	13.50	1
3045547	24ACB348A30	CNPV*4824A**+TDR		46000	11.00	13.00	1
3045552	24ACB348A30	CNPV*6024A**	58CV(A,X)135-22	46000	11.50	14.00	1
3101612	24ACB348A30	CNPV*6024A**	58MEB120-20	46000	11.70	14.00	1
3045551	24ACB348A30	CNPV*6024A**	58MV(B,C)120-20	46000	11.20	13.50	1
3045512	24ACB348A30	CNPV*6024A**	58PH*135-20	46000	11.70	14.00	1
3045550	24ACB348A30	CNPV*6024A**+TDR		47000	11.00	13.20	1
3045566	24ACB348A30	CSPH*4812A**	58CV(A,X)090-16	44500	11.20	13.50	1
3101619	24ACB348A30	CSPH*4812A**	58MEB080-16	45500	11.20	13.20	1
3101620	24ACB348A30	CSPH*4812A**	58MEB100-20	45000	11.50	13.50	1
3101621	24ACB348A30	CSPH*4812A**	58MEB120-20	45500	11.50	13.50	1
3045565	24ACB348A30	CSPH*4812A**	58MV(B,C)080-20	44500	11.00	13.20	1

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045520	24ACB348A30	CSPH*4812A**	58PH*090-16	45500	11.50	13.50	1
3045521	24ACB348A30	CSPH*4812A**	58PH*110-20	45500	11.70	13.50	1
3045522	24ACB348A30	CSPH*4812A**	58PH*135-20	45500	11.20	13.50	1
3045564	24ACB348A30	CSPH*4812A**+TDR		45500	11.00	13.00	1
3045569	24ACB348A30	CSPH*6012A**	58CV(A,X)090-16	45000	11.20	13.50	1
3101622	24ACB348A30	CSPH*6012A**	58MEB080-16	46000	11.50	13.50	1
3101623	24ACB348A30	CSPH*6012A**	58MEB100-20	46000	11.70	14.00	1
3101624	24ACB348A30	CSPH*6012A**	58MEB120-20	46000	11.70	14.00	1
3045568	24ACB348A30	CSPH*6012A**	58MV(B,C)080-20	45000	11.20	13.50	1
3045523	24ACB348A30	CSPH*6012A**	58PH*070-16	46000	11.00	13.00	1
3045524	24ACB348A30	CSPH*6012A**	58PH*090-16	46000	11.70	14.00	1
3045525	24ACB348A30	CSPH*6012A**	58PH*110-20	46000	12.00	14.00	1
3045526	24ACB348A30	CSPH*6012A**	58PH*135-20	46000	11.70	14.00	1
3045567	24ACB348A30	CSPH*6012A**+TDR		46000	11.00	13.20	1
3045572	24ACB348A30	FE4AN(B,F)005+UI		46500	11.50	14.00	1
3045573	24ACB348A30	FE4ANB006+UI		47000	11.70	14.50	1
3045574	24ACB348A30	FV4BN(B,F)005		46500	11.50	14.00	1
3045575	24ACB348A30	FV4BNB006		47000	11.70	14.50	1
3045570	24ACB348A30	FX4CN(B,F)048		47000	11.20	13.50	1
3045571	24ACB348A30	FX4CN(B,F)060		47500	11.50	14.00	1
3045577	24ACB348A30	FY4ANB060		46500	11.00	13.20	1
3045576	24ACB348A30	FY4ANF048		46000	11.00	13.00	1
3046459	24ACB348A50	*CAP**4821A**+TDR		46000	11.00	13.00	3
3046485	24ACB348A50	CAP**4817A**	58CV(A,X)090-16	45500	11.20	13.50	3
3124062	24ACB348A50	CAP**4817A**	58MEB080-16	45500	11.20	13.20	3
3046484	24ACB348A50	CAP**4817A**+TDR		45500	11.00	13.00	3
3046488	24ACB348A50	CAP**4821A**	58CV(A,X)110-20	45000	11.20	13.50	3
3124063	24ACB348A50	CAP**4821A**	58MEB100-20	45000	11.50	13.50	3
3046486	24ACB348A50	CAP**4821A**	58MV(B,C)080-20	45000	11.00	13.20	3
3046487	24ACB348A50	CAP**4821A**	58MV(B,C)100-20	45000	11.40	13.65	3
3046460	24ACB348A50	CAP**4821A**	58PH*090-16	45000	11.50	13.50	3
3046461	24ACB348A50	CAP**4821A**	58PH*110-20	45000	11.70	13.50	3
3046491	24ACB348A50	CAP**4824A**	58CV(A,X)135-22	45500	11.20	13.50	3
3124064	24ACB348A50	CAP**4824A**	58MEB120-20	45500	11.50	13.50	3
3046490	24ACB348A50	CAP**4824A**	58MV(B,C)120-20	45000	11.20	13.50	3
3046462	24ACB348A50	CAP**4824A**	58PH*135-20	45000	11.20	13.50	3
3046489	24ACB348A50	CAP**4824A**+TDR		46000	11.00	13.00	3
3046494	24ACB348A50	CAP**6021A**	58CV(A,X)110-20	47500	11.20	13.50	3
3124065	24ACB348A50	CAP**6021A**	58MEB100-20	46000	11.70	14.00	3
3046493	24ACB348A50	CAP**6021A**	58MV(B,C)080-20	46000	11.20	13.50	3
3046463	24ACB348A50	CAP**6021A**	58PH*090-16	46500	11.70	13.50	3
3046464	24ACB348A50	CAP**6021A**	58PH*110-20	46500	12.00	14.00	3
3046492	24ACB348A50	CAP**6021A**+TDR		47000	11.00	13.20	3
3046497	24ACB348A50	CAP**6024A**	58CV(A,X)135-22	46500	11.50	14.00	3
3124066	24ACB348A50	CAP**6024A**	58MEB120-20	46000	11.70	14.00	3
3046496	24ACB348A50	CAP**6024A**	58MV(B,C)120-20	46000	11.50	14.00	3
3046465	24ACB348A50	CAP**6024A**	58PH*135-20	46000	11.70	14.00	3
3046495	24ACB348A50	CAP**6024A**+TDR		47000	11.00	13.20	3
3046520	24ACB348A50	CNPF*4818A**+TDR		45000	11.00	13.00	3
3046513	24ACB348A50	CNPH*4821A**	58CV(A,X)090-16	45000	11.20	13.50	3
3046514	24ACB348A50	CNPH*4821A**	58CV(A,X)110-20	45500	11.20	13.50	3
3124070	24ACB348A50	CNPH*4821A**	58MEB080-16	45500	11.20	13.20	3
3124071	24ACB348A50	CNPH*4821A**	58MEB100-20	45000	11.50	13.50	3
3124072	24ACB348A50	CNPH*4821A**	58MEB120-20	45500	11.50	13.50	3
3046511	24ACB348A50	CNPH*4821A**	58MV(B,C)080-20	45000	11.00	13.20	3
3046512	24ACB348A50	CNPH*4821A**	58MV(B,C)100-20	45000	11.20	13.50	3
3046470	24ACB348A50	CNPH*4821A**	58PH*090-16	45500	11.50	13.50	3
3046471	24ACB348A50	CNPH*4821A**	58PH*110-20	45500	11.70	13.50	3
3046472	24ACB348A50	CNPH*4821A**	58PH*135-20	45500	11.50	13.20	3
3046510	24ACB348A50	CNPH*4821A**+TDR		46000	11.00	13.00	3
3046518	24ACB348A50	CNPH*6024A**	58CV(A,X)090-16	46000	11.20	13.50	3
3046519	24ACB348A50	CNPH*6024A**	58CV(A,X)110-20	46000	11.20	13.50	3
3124073	24ACB348A50	CNPH*6024A**	58MEB080-16	46000	11.50	13.50	3
3124074	24ACB348A50	CNPH*6024A**	58MEB100-20	46000	11.70	14.00	3
3124075	24ACB348A50	CNPH*6024A**	58MEB120-20	46000	11.70	14.00	3
3046516	24ACB348A50	CNPH*6024A**	58MV(B,C)080-20	46000	11.20	13.50	3
3046517	24ACB348A50	CNPH*6024A**	58MV(B,C)100-20	46000	11.20	13.50	3
3046473	24ACB348A50	CNPH*6024A**	58PH*070-16	45500	11.00	13.00	3
3046474	24ACB348A50	CNPH*6024A**	58PH*090-16	46000	11.70	13.50	3
3046475	24ACB348A50	CNPH*6024A**	58PH*110-20	46000	11.70	14.00	3
3046476	24ACB348A50	CNPH*6024A**	58PH*135-20	46000	11.70	14.00	3
3046515	24ACB348A50	CNPH*6024A**+TDR		47000	11.00	13.20	3
3046500	24ACB348A50	CNPV*4221A**	58CV(A,X)110-20	44500	11.20	13.50	3
3046499	24ACB348A50	CNPV*4221A**	58MV(B,C)080-20	44500	11.00	13.20	3
3046498	24ACB348A50	CNPV*4221A**+TDR		44500	10.95	13.00	3
3046503	24ACB348A50	CNPV*4821A**	58CV(A,X)110-20	45000	11.20	13.50	3
3124067	24ACB348A50	CNPV*4821A**	58MEB100-20	45000	11.50	13.50	3
3046502	24ACB348A50	CNPV*4821A**	58MV(B,C)080-20	45000	11.00	13.20	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046466	24ACB348A50	CNPV*4821A**	58PH*090-16	45500	11.50	13.50	3
3046467	24ACB348A50	CNPV*4821A**	58PH*110-20	45500	11.70	13.50	3
3046501	24ACB348A50	CNPV*4821A**+TDR		46000	11.00	13.00	3
3046506	24ACB348A50	CNPV*4824A**	58CV(A,X)135-22	45500	11.20	13.50	3
3124068	24ACB348A50	CNPV*4824A**	58MEB120-20	45500	11.50	13.50	3
3046505	24ACB348A50	CNPV*4824A**	58MV(B,C)120-20	45500	11.20	13.50	3
3046468	24ACB348A50	CNPV*4824A**	58PH*135-20	45500	11.20	13.50	3
3046504	24ACB348A50	CNPV*4824A**+TDR		46000	11.00	13.00	3
3046509	24ACB348A50	CNPV*6024A**	58CV(A,X)135-22	46000	11.50	14.00	3
3124069	24ACB348A50	CNPV*6024A**	58MEB120-20	46000	11.70	14.00	3
3046508	24ACB348A50	CNPV*6024A**	58MV(B,C)120-20	46000	11.20	13.50	3
3046469	24ACB348A50	CNPV*6024A**	58PH*135-20	46000	11.70	14.00	3
3046507	24ACB348A50	CNPV*6024A**+TDR		47000	11.00	13.20	3
3046523	24ACB348A50	CSPH*4812A**	58CV(A,X)090-16	44500	11.20	13.50	3
3124076	24ACB348A50	CSPH*4812A**	58MEB080-16	45500	11.20	13.20	3
3124077	24ACB348A50	CSPH*4812A**	58MEB100-20	45000	11.50	13.50	3
3124078	24ACB348A50	CSPH*4812A**	58MEB120-20	45500	11.50	13.50	3
3046522	24ACB348A50	CSPH*4812A**	58MV(B,C)080-20	44500	11.00	13.20	3
3046477	24ACB348A50	CSPH*4812A**	58PH*090-16	45500	11.50	13.50	3
3046478	24ACB348A50	CSPH*4812A**	58PH*110-20	45500	11.70	13.50	3
3046479	24ACB348A50	CSPH*4812A**	58PH*135-20	45500	11.20	13.50	3
3046521	24ACB348A50	CSPH*4812A**+TDR		45500	11.00	13.00	3
3046526	24ACB348A50	CSPH*6012A**	58CV(A,X)090-16	45000	11.20	13.50	3
3124079	24ACB348A50	CSPH*6012A**	58MEB080-16	46000	11.50	13.50	3
3124080	24ACB348A50	CSPH*6012A**	58MEB100-20	46000	11.70	14.00	3
3124081	24ACB348A50	CSPH*6012A**	58MEB120-20	46000	11.70	14.00	3
3046525	24ACB348A50	CSPH*6012A**	58MV(B,C)080-20	45000	11.20	13.50	3
3046480	24ACB348A50	CSPH*6012A**	58PH*070-16	46000	11.00	13.00	3
3046481	24ACB348A50	CSPH*6012A**	58PH*090-16	46000	11.70	14.00	3
3046482	24ACB348A50	CSPH*6012A**	58PH*110-20	46000	12.00	14.00	3
3046483	24ACB348A50	CSPH*6012A**	58PH*135-20	46000	11.70	14.00	3
3046524	24ACB348A50	CSPH*6012A**+TDR		46000	11.00	13.20	3
3046529	24ACB348A50	FE4AN(B,F)005+UI		46500	11.50	14.00	3
3046530	24ACB348A50	FE4ANB006+UI		47000	11.70	14.50	3
3046531	24ACB348A50	FV4BN(B,F)005		46500	11.50	14.00	3
3046532	24ACB348A50	FV4BNB006		47000	11.70	14.50	3
3046527	24ACB348A50	FX4CN(B,F)048		47000	11.20	13.50	3
3046528	24ACB348A50	FX4CN(B,F)060		47500	11.50	14.00	3
3046534	24ACB348A50	FY4ANB060		46500	11.00	13.20	3
3046533	24ACB348A50	FY4ANF048		46000	11.00	13.00	3
3046535	24ACB348A60	*CAP**4821A**+TDR		46000	11.00	13.00	3
3046561	24ACB348A60	CAP**4817A**	58CV(A,X)090-16	45500	11.20	13.50	3
3124166	24ACB348A60	CAP**4817A**	58MEB080-16	45500	11.20	13.20	3
3046560	24ACB348A60	CAP**4817A**+TDR		45500	11.00	13.00	3
3046564	24ACB348A60	CAP**4821A**	58CV(A,X)110-20	45000	11.20	13.50	3
3124167	24ACB348A60	CAP**4821A**	58MEB100-20	45000	11.50	13.50	3
3046562	24ACB348A60	CAP**4821A**	58MV(B,C)080-20	45000	11.00	13.20	3
3046563	24ACB348A60	CAP**4821A**	58MV(B,C)100-20	45000	11.40	13.65	3
3046536	24ACB348A60	CAP**4821A**	58PH*090-16	45000	11.50	13.50	3
3046537	24ACB348A60	CAP**4821A**	58PH*110-20	45000	11.70	13.50	3
3046567	24ACB348A60	CAP**4824A**	58CV(A,X)135-22	45500	11.20	13.50	3
3124168	24ACB348A60	CAP**4824A**	58MEB120-20	45500	11.50	13.50	3
3046566	24ACB348A60	CAP**4824A**	58MV(B,C)120-20	45000	11.20	13.50	3
3046538	24ACB348A60	CAP**4824A**	58PH*135-20	45000	11.20	13.50	3
3046565	24ACB348A60	CAP**4824A**+TDR		46000	11.00	13.00	3
3046570	24ACB348A60	CAP**6021A**	58CV(A,X)110-20	47500	11.20	13.50	3
3124169	24ACB348A60	CAP**6021A**	58MEB100-20	46000	11.70	14.00	3
3046569	24ACB348A60	CAP**6021A**	58MV(B,C)080-20	46000	11.20	13.50	3
3046539	24ACB348A60	CAP**6021A**	58PH*090-16	46500	11.70	13.50	3
3046540	24ACB348A60	CAP**6021A**	58PH*110-20	46500	12.00	14.00	3
3046568	24ACB348A60	CAP**6021A**+TDR		47000	11.00	13.20	3
3046573	24ACB348A60	CAP**6024A**	58CV(A,X)135-22	46500	11.50	14.00	3
3124170	24ACB348A60	CAP**6024A**	58MEB120-20	46000	11.70	14.00	3
3046572	24ACB348A60	CAP**6024A**	58MV(B,C)120-20	46000	11.50	14.00	3
3046541	24ACB348A60	CAP**6024A**	58PH*135-20	46000	11.70	14.00	3
3046571	24ACB348A60	CAP**6024A**+TDR		47000	11.00	13.20	3
3046596	24ACB348A60	CNPF*4818A**+TDR		45000	11.00	13.00	3
3046589	24ACB348A60	CNPH*4821A**	58CV(A,X)090-16	45000	11.20	13.50	3
3046590	24ACB348A60	CNPH*4821A**	58CV(A,X)110-20	45500	11.20	13.50	3
3124174	24ACB348A60	CNPH*4821A**	58MEB080-16	45500	11.20	13.20	3
3124175	24ACB348A60	CNPH*4821A**	58MEB100-20	45000	11.50	13.50	3
3124176	24ACB348A60	CNPH*4821A**	58MEB120-20	45500	11.50	13.50	3
3046587	24ACB348A60	CNPH*4821A**	58MV(B,C)080-20	45000	11.00	13.20	3
3046588	24ACB348A60	CNPH*4821A**	58MV(B,C)100-20	45000	11.20	13.50	3
3046546	24ACB348A60	CNPH*4821A**	58PH*090-16	45500	11.50	13.50	3
3046547	24ACB348A60	CNPH*4821A**	58PH*110-20	45500	11.70	13.50	3
3046548	24ACB348A60	CNPH*4821A**	58PH*135-20	45500	11.50	13.20	3
3046586	24ACB348A60	CNPH*4821A**+TDR		46000	11.00	13.00	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3046594	24ACB348A60	CNPH*6024A**	58CV(A,X)090-16	46000	11.20	13.50	3
3046595	24ACB348A60	CNPH*6024A**	58CV(A,X)110-20	46000	11.20	13.50	3
3124177	24ACB348A60	CNPH*6024A**	58MEB080-16	46000	11.50	13.50	3
3124178	24ACB348A60	CNPH*6024A**	58MEB100-20	46000	11.70	14.00	3
3124179	24ACB348A60	CNPH*6024A**	58MEB120-20	46000	11.70	14.00	3
3046592	24ACB348A60	CNPH*6024A**	58MV(B,C)080-20	46000	11.20	13.50	3
3046593	24ACB348A60	CNPH*6024A**	58MV(B,C)100-20	46000	11.20	13.50	3
3046549	24ACB348A60	CNPH*6024A**	58PH*070-16	45500	11.00	13.00	3
3046550	24ACB348A60	CNPH*6024A**	58PH*090-16	46000	11.70	13.50	3
3046551	24ACB348A60	CNPH*6024A**	58PH*110-20	46000	11.70	14.00	3
3046552	24ACB348A60	CNPH*6024A**	58PH*135-20	46000	11.70	14.00	3
3046591	24ACB348A60	CNPH*6024A**+TDR		47000	11.00	13.20	3
3046576	24ACB348A60	CNPV*4221A**	58CV(A,X)110-20	44500	11.20	13.50	3
3046575	24ACB348A60	CNPV*4221A**	58MV(B,C)080-20	44500	11.00	13.20	3
3046574	24ACB348A60	CNPV*4221A**+TDR		44500	10.95	13.00	3
3046579	24ACB348A60	CNPV*4821A**	58CV(A,X)110-20	45000	11.20	13.50	3
3124171	24ACB348A60	CNPV*4821A**	58MEB100-20	45000	11.50	13.50	3
3046578	24ACB348A60	CNPV*4821A**	58MV(B,C)080-20	45000	11.00	13.20	3
3046542	24ACB348A60	CNPV*4821A**	58PH*090-16	45500	11.50	13.50	3
3046543	24ACB348A60	CNPV*4821A**	58PH*110-20	45500	11.70	13.50	3
3046577	24ACB348A60	CNPV*4821A**+TDR		46000	11.00	13.00	3
3046582	24ACB348A60	CNPV*4824A**	58CV(A,X)135-22	45500	11.20	13.50	3
3124172	24ACB348A60	CNPV*4824A**	58MEB120-20	45500	11.50	13.50	3
3046581	24ACB348A60	CNPV*4824A**	58MV(B,C)120-20	45500	11.20	13.50	3
3046544	24ACB348A60	CNPV*4824A**	58PH*135-20	45500	11.20	13.50	3
3046580	24ACB348A60	CNPV*4824A**+TDR		46000	11.00	13.00	3
3046585	24ACB348A60	CNPV*6024A**	58CV(A,X)135-22	46000	11.50	14.00	3
3124173	24ACB348A60	CNPV*6024A**	58MEB120-20	46000	11.70	14.00	3
3046584	24ACB348A60	CNPV*6024A**	58MV(B,C)120-20	46000	11.20	13.50	3
3046545	24ACB348A60	CNPV*6024A**	58PH*135-20	46000	11.70	14.00	3
3046583	24ACB348A60	CNPV*6024A**+TDR		47000	11.00	13.20	3
3046599	24ACB348A60	CSPH*4812A**	58CV(A,X)090-16	44500	11.20	13.50	3
3124180	24ACB348A60	CSPH*4812A**	58MEB080-16	45500	11.20	13.20	3
3124181	24ACB348A60	CSPH*4812A**	58MEB100-20	45000	11.50	13.50	3
3124182	24ACB348A60	CSPH*4812A**	58MEB120-20	45500	11.50	13.50	3
3046598	24ACB348A60	CSPH*4812A**	58MV(B,C)080-20	44500	11.00	13.20	3
3046553	24ACB348A60	CSPH*4812A**	58PH*090-16	45500	11.50	13.50	3
3046554	24ACB348A60	CSPH*4812A**	58PH*110-20	45500	11.70	13.50	3
3046555	24ACB348A60	CSPH*4812A**	58PH*135-20	45500	11.20	13.50	3
3046597	24ACB348A60	CSPH*4812A**+TDR		45500	11.00	13.00	3
3046602	24ACB348A60	CSPH*6012A**	58CV(A,X)090-16	45000	11.20	13.50	3
3124183	24ACB348A60	CSPH*6012A**	58MEB080-16	46000	11.50	13.50	3
3124184	24ACB348A60	CSPH*6012A**	58MEB100-20	46000	11.70	14.00	3
3124185	24ACB348A60	CSPH*6012A**	58MEB120-20	46000	11.70	14.00	3
3046601	24ACB348A60	CSPH*6012A**	58MV(B,C)080-20	45000	11.20	13.50	3
3046556	24ACB348A60	CSPH*6012A**	58PH*070-16	46000	11.00	13.00	3
3046557	24ACB348A60	CSPH*6012A**	58PH*090-16	46000	11.70	14.00	3
3046558	24ACB348A60	CSPH*6012A**	58PH*110-20	46000	12.00	14.00	3
3046559	24ACB348A60	CSPH*6012A**	58PH*135-20	46000	11.70	14.00	3
3046600	24ACB348A60	CSPH*6012A**+TDR		46000	11.00	13.20	3
3046605	24ACB348A60	FE4AN(B,F)005+UI		46500	11.50	14.00	3
3046606	24ACB348A60	FE4ANB006+UI		47000	11.70	14.50	3
3046607	24ACB348A60	FV4BN(B,F)005		46500	11.50	14.00	3
3046608	24ACB348A60	FV4BNB006		47000	11.70	14.50	3
3046603	24ACB348A60	FX4CN(B,F)048		47000	11.20	13.50	3
3046604	24ACB348A60	FX4CN(B,F)060		47500	11.50	14.00	3
3046610	24ACB348A60	FY4ANB060		46500	11.00	13.20	3
3046609	24ACB348A60	FY4ANF048		46000	11.00	13.00	3
3045578	24ACB360A30	*CAP**6024A**+TDR		57500	11.00	13.00	1
3045590	24ACB360A30	CAP**6021A**	58CV(A,X)110-20	56000	11.00	13.20	1
3101625	24ACB360A30	CAP**6021A**	58MEB100-20	56000	11.20	13.20	1
3045579	24ACB360A30	CAP**6021A**	58PH*090-16	55500	11.00	13.00	1
3045580	24ACB360A30	CAP**6021A**	58PH*110-20	56000	11.00	13.00	1
3045589	24ACB360A30	CAP**6021A**+TDR		56500	11.00	13.00	1
3045591	24ACB360A30	CAP**6024A**	58CV(A,X)135-22	56500	11.00	13.20	1
3045592	24ACB360A30	CAP**6024A**	58CV(A,X)155-22	56500	11.20	13.50	1
3101626	24ACB360A30	CAP**6024A**	58MEB120-20	56000	11.20	13.50	1
3045581	24ACB360A30	CAP**6024A**	58PH*135-20	56000	11.00	13.00	1
3045597	24ACB360A30	CNPH*6024A**	58CV(A,X)135-22	56000	11.20	13.50	1
3045598	24ACB360A30	CNPH*6024A**	58CV(A,X)155-22	56500	11.20	13.50	1
3101628	24ACB360A30	CNPH*6024A**	58MEB080-16	55500	11.00	13.00	1
3101629	24ACB360A30	CNPH*6024A**	58MEB100-20	55500	11.20	13.20	1
3101630	24ACB360A30	CNPH*6024A**	58MEB120-20	56000	11.20	13.50	1
3045583	24ACB360A30	CNPH*6024A**	58PH*090-16	55500	11.00	13.00	1
3045584	24ACB360A30	CNPH*6024A**	58PH*110-20	56000	11.00	13.00	1
3045585	24ACB360A30	CNPH*6024A**	58PH*135-20	56000	11.00	13.00	1
3045596	24ACB360A30	CNPH*6024A**+TDR		56000	11.00	13.00	1
3045594	24ACB360A30	CNPV*6024A**	58CV(A,X)135-22	56000	11.00	13.50	1

24ACB3

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3045595	24ACB360A30	CNPV*6024A**	58CV(A,X)155-22	56500	11.20	13.50	1
3101627	24ACB360A30	CNPV*6024A**	58MEB120-20	56000	11.20	13.50	1
3045582	24ACB360A30	CNPV*6024A**	58PH*135-20	56000	11.00	13.00	1
3045593	24ACB360A30	CNPV*6024A**+TDR		57000	11.00	13.00	1
3045600	24ACB360A30	CSPH*6012A**	58CV(A,X)110-20	55500	11.00	13.20	1
3045601	24ACB360A30	CSPH*6012A**	58CV(A,X)135-22	55500	11.20	13.50	1
3045602	24ACB360A30	CSPH*6012A**	58CV(A,X)155-22	55500	11.20	13.50	1
3101631	24ACB360A30	CSPH*6012A**	58MEB080-16	55500	11.00	13.20	1
3101632	24ACB360A30	CSPH*6012A**	58MEB100-20	56000	11.20	13.20	1
3101633	24ACB360A30	CSPH*6012A**	58MEB120-20	56000	11.20	13.50	1
3045586	24ACB360A30	CSPH*6012A**	58PH*090-16	56000	11.00	13.00	1
3045587	24ACB360A30	CSPH*6012A**	58PH*110-20	56500	11.50	13.50	1
3045588	24ACB360A30	CSPH*6012A**	58PH*135-20	56000	11.00	13.00	1
3045599	24ACB360A30	CSPH*6012A**+TDR		56500	11.00	13.00	1
3045604	24ACB360A30	FE4ANB006+UI		57000	11.20	13.50	1
3045605	24ACB360A30	FV4BNB006		57000	11.20	13.50	1
3045603	24ACB360A30	FX4CN(B,F)060		58000	11.00	13.20	1
3045606	24ACB360A30	FY4ANB060		56500	11.00	13.00	1
3046611	24ACB360A50	*CAP**6024A**+TDR		57500	11.00	13.00	3
3046623	24ACB360A50	CAP**6021A**	58CV(A,X)110-20	56000	11.00	13.20	3
3124082	24ACB360A50	CAP**6021A**	58MEB100-20	56000	11.20	13.20	3
3046612	24ACB360A50	CAP**6021A**	58PH*090-16	55500	11.00	13.00	3
3046613	24ACB360A50	CAP**6021A**	58PH*110-20	56000	11.00	13.00	3
3046622	24ACB360A50	CAP**6021A**+TDR		56500	11.00	13.00	3
3046624	24ACB360A50	CAP**6024A**	58CV(A,X)135-22	56500	11.00	13.20	3
3046625	24ACB360A50	CAP**6024A**	58CV(A,X)155-22	56500	11.20	13.50	3
3124083	24ACB360A50	CAP**6024A**	58MEB120-20	56000	11.20	13.50	3
3046614	24ACB360A50	CAP**6024A**	58PH*135-20	56000	11.00	13.00	3
3046630	24ACB360A50	CNPH*6024A**	58CV(A,X)135-22	56000	11.20	13.50	3
3046631	24ACB360A50	CNPH*6024A**	58CV(A,X)155-22	56500	11.20	13.50	3
3124085	24ACB360A50	CNPH*6024A**	58MEB080-16	55500	11.00	13.00	3
3124086	24ACB360A50	CNPH*6024A**	58MEB100-20	55500	11.20	13.20	3
3124087	24ACB360A50	CNPH*6024A**	58MEB120-20	56000	11.20	13.50	3
3046616	24ACB360A50	CNPH*6024A**	58PH*090-16	55500	11.00	13.00	3
3046617	24ACB360A50	CNPH*6024A**	58PH*110-20	56000	11.00	13.00	3
3046618	24ACB360A50	CNPH*6024A**	58PH*135-20	56000	11.00	13.00	3
3046629	24ACB360A50	CNPH*6024A**+TDR		56000	11.00	13.00	3
3046627	24ACB360A50	CNPV*6024A**	58CV(A,X)135-22	56000	11.00	13.50	3
3046628	24ACB360A50	CNPV*6024A**	58CV(A,X)155-22	56500	11.20	13.50	3
3124084	24ACB360A50	CNPV*6024A**	58MEB120-20	56000	11.20	13.50	3
3046615	24ACB360A50	CNPV*6024A**	58PH*135-20	56000	11.00	13.00	3
3046626	24ACB360A50	CNPV*6024A**+TDR		57000	11.00	13.00	3
3046633	24ACB360A50	CSPH*6012A**	58CV(A,X)110-20	55500	11.00	13.20	3
3046634	24ACB360A50	CSPH*6012A**	58CV(A,X)135-22	55500	11.20	13.50	3
3046635	24ACB360A50	CSPH*6012A**	58CV(A,X)155-22	55500	11.20	13.50	3
3124088	24ACB360A50	CSPH*6012A**	58MEB080-16	55500	11.00	13.20	3
3124089	24ACB360A50	CSPH*6012A**	58MEB100-20	56000	11.20	13.20	3
3124090	24ACB360A50	CSPH*6012A**	58MEB120-20	56000	11.20	13.50	3
3046619	24ACB360A50	CSPH*6012A**	58PH*090-16	56000	11.00	13.00	3
3046620	24ACB360A50	CSPH*6012A**	58PH*110-20	56500	11.50	13.50	3
3046621	24ACB360A50	CSPH*6012A**	58PH*135-20	56000	11.00	13.00	3
3046632	24ACB360A50	CSPH*6012A**+TDR		56500	11.00	13.00	3
3046637	24ACB360A50	FE4ANB006+UI		57000	11.20	13.50	3
3046638	24ACB360A50	FV4BNB006		57000	11.20	13.50	3
3046636	24ACB360A50	FX4CN(B,F)060		58000	11.00	13.20	3
3046639	24ACB360A50	FY4ANB060		56500	11.00	13.00	3
3046640	24ACB360A60	*CAP**6024A**+TDR		57500	11.00	13.00	3
3046652	24ACB360A60	CAP**6021A**	58CV(A,X)110-20	56000	11.00	13.20	3
3124186	24ACB360A60	CAP**6021A**	58MEB100-20	56000	11.20	13.20	3
3046641	24ACB360A60	CAP**6021A**	58PH*090-16	55500	11.00	13.00	3
3046642	24ACB360A60	CAP**6021A**	58PH*110-20	56000	11.00	13.00	3
3046651	24ACB360A60	CAP**6021A**+TDR		56500	11.00	13.00	3
3046653	24ACB360A60	CAP**6024A**	58CV(A,X)135-22	56500	11.00	13.20	3
3046654	24ACB360A60	CAP**6024A**	58CV(A,X)155-22	56500	11.20	13.50	3
3124187	24ACB360A60	CAP**6024A**	58MEB120-20	56000	11.20	13.50	3
3046643	24ACB360A60	CAP**6024A**	58PH*135-20	56000	11.00	13.00	3
3046659	24ACB360A60	CNPH*6024A**	58CV(A,X)135-22	56000	11.20	13.50	3
3046660	24ACB360A60	CNPH*6024A**	58CV(A,X)155-22	56500	11.20	13.50	3
3124189	24ACB360A60	CNPH*6024A**	58MEB080-16	55500	11.00	13.00	3
3124190	24ACB360A60	CNPH*6024A**	58MEB100-20	55500	11.20	13.20	3
3124191	24ACB360A60	CNPH*6024A**	58MEB120-20	56000	11.20	13.50	3
3046645	24ACB360A60	CNPH*6024A**	58PH*090-16	55500	11.00	13.00	3
3046646	24ACB360A60	CNPH*6024A**	58PH*110-20	56000	11.00	13.00	3
3046647	24ACB360A60	CNPH*6024A**	58PH*135-20	56000	11.00	13.00	3
3046658	24ACB360A60	CNPH*6024A**+TDR		56000	11.00	13.00	3
3046656	24ACB360A60	CNPV*6024A**	58CV(A,X)135-22	56000	11.00	13.50	3
3046657	24ACB360A60	CNPV*6024A**	58CV(A,X)155-22	56500	11.20	13.50	3

See notes on page 29

COMBINATION RATINGS CONTINUED

ARI Ref. No.	Model Number	Indoor Model	Furnace Model	Capacity	EER	SEER	PHASE
3124188	24ACB360A60	CNPV*6024A**	58MEB120-20	56000	11.20	13.50	3
3046644	24ACB360A60	CNPV*6024A**	58PH*135-20	56000	11.00	13.00	3
3046655	24ACB360A60	CNPV*6024A** + TDR		57000	11.00	13.00	3
3046662	24ACB360A60	CSPH*6012A**	58CV(A,X)110-20	55500	11.00	13.20	3
3046663	24ACB360A60	CSPH*6012A**	58CV(A,X)135-22	55500	11.20	13.50	3
3046664	24ACB360A60	CSPH*6012A**	58CV(A,X)155-22	55500	11.20	13.50	3
3124192	24ACB360A60	CSPH*6012A**	58MEB080-16	55500	11.00	13.20	3
3124193	24ACB360A60	CSPH*6012A**	58MEB100-20	56000	11.20	13.20	3
3124194	24ACB360A60	CSPH*6012A**	58MEB120-20	56000	11.20	13.50	3
3046648	24ACB360A60	CSPH*6012A**	58PH*090-16	56000	11.00	13.00	3
3046649	24ACB360A60	CSPH*6012A**	58PH*110-20	56500	11.50	13.50	3
3046650	24ACB360A60	CSPH*6012A**	58PH*135-20	56000	11.00	13.00	3
3046661	24ACB360A60	CSPH*6012A** + TDR		56500	11.00	13.00	3
3046666	24ACB360A60	FE4ANB006+UI		57000	11.20	13.50	3
3046667	24ACB360A60	FV4BNB006		57000	11.20	13.50	3
3046665	24ACB360A60	FX4CN(B,F)060		58000	11.00	13.20	3
3046668	24ACB360A60	FY4ANB060		56500	11.00	13.00	3

* Tested combination .

NOTES:

1. Ratings are net values reflecting the effects of circulating fan motor heat. Supplemental electric heat is not included.
2. Tested outdoor/indoor combinations have been tested in accordance with DOE test procedures for central air conditioners. Ratings for other combinations are determined under DOE computer simulation procedures.
3. Determine actual CFM values obtainable for your system by referring to fan performance data in fan coil or furnace coil literature.
4. Do not apply with capillary tube coils as performance and reliability are significantly affected.

EER — Energy Efficiency Ratio

SEER — Seasonal Energy Efficiency Ratio

TDR — Time-Delay Relay. In most cases, only one method should be used to achieve TDR function. Using more than one method in a system may cause degradation in performance. Use either the accessory Time-Delay Relay, KAATD0101TDR, or a furnace equipped with TDR. Most Carrier furnaces are equipped with TDR.

TXV — Thermostatic Expansion Valve

DETAILED COOLING CAPACITIES#

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																								
CFM	EWB ° F (° C)	75 (23.9)				85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)		Total Sys. KW**	Capacity MBTuh	Total Sys. KW**
		Capacity MBTuh		Total Sys. KW**	Capacity MBTuh		Total Sys. KW**	Capacity MBTuh		Total Sys. KW**	Capacity MBTuh		Total Sys. KW**	Capacity MBTuh		Total Sys. KW**	Capacity MBTuh		Total Sys. KW**							
		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†	Total	Sens†			
24ACB318A30 Outdoor Section With 18 Indoor Section																										
525	72 (22.2)	20.46	10.76	1.21	19.55	10.41	1.36	18.59	10.05	1.53	17.82	9.69	1.71	16.57	9.30	1.91	15.40	8.88	2.13							
	67 (19.4)	18.79	13.26	1.22	17.95	12.90	1.37	17.05	12.52	1.72	16.12	12.14	1.72	15.13	11.74	1.92	14.03	11.30	2.13							
	62 (16.7)	17.27	15.73	1.22	16.49	15.36	1.37	15.68	14.97	1.54	14.83	14.55	1.72	14.00	13.15	1.92	13.15	13.15	2.13							
	57 (13.9)	16.78	16.78	1.23	16.15	16.15	1.37	15.48	15.48	1.54	14.77	14.77	1.72	14.00	14.00	1.92	13.15	13.15	2.13							
600	72 (22.2)	20.79	11.28	1.24	19.83	10.92	1.39	18.83	10.55	1.56	17.83	10.19	1.74	16.76	9.80	1.94	15.55	9.37	2.16							
	67 (19.4)	19.11	14.10	1.25	18.23	13.73	1.40	17.30	13.36	1.56	16.35	12.97	1.74	15.33	12.57	1.94	14.20	12.12	2.16							
	62 (16.7)	17.66	16.88	1.25	16.87	16.49	1.40	16.06	16.06	1.56	15.32	15.32	1.75	14.51	14.51	1.94	13.61	13.61	2.16							
	57 (13.9)	17.46	17.46	1.25	16.79	16.79	1.40	16.07	16.07	1.56	15.32	15.32	1.75	14.51	14.51	1.94	13.61	13.61	2.16							
675	72 (22.2)	21.03	11.77	1.27	20.02	11.40	1.42	18.99	11.03	1.58	17.97	10.67	1.77	16.88	10.26	1.97	15.65	9.85	2.18							
	67 (19.4)	19.33	14.90	1.27	18.43	14.54	1.42	17.48	14.15	1.59	16.51	13.77	1.77	15.48	13.35	1.97	14.33	12.89	2.19							
	62 (16.7)	18.01	17.91	1.28	17.30	17.30	1.43	16.54	16.54	1.59	15.76	15.76	1.77	14.92	14.92	1.97	13.97	13.97	2.19							
	57 (13.9)	18.01	18.01	1.28	17.30	17.30	1.43	16.55	16.55	1.59	15.76	15.76	1.77	14.92	14.92	1.97	13.97	13.97	2.19							

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CAP**1814A**	1.00	1.00	
CAP**2414A**	1.01	1.01	
CAP**2417A**	1.01	1.01	
CNPF*2418A**	1.00	1.00	
CNPH*2417A**	1.00	1.00	
CNPV*1814A**	0.99	0.99	
CNPV*2414A**	1.00	1.00	
CNPV*2417A**	1.00	1.00	
CSPH*2412A**	0.97	0.97	
FE4ANF002	1.02	0.93	
FF1ENP018	0.99	0.99	
FF1ENP024	1.01	1.01	
FV4BNF002	1.02	0.93	
FX4CNF018	1.01	0.95	
FX4CNF024	1.02	0.96	
FY4ANF018	0.99	0.99	
FY4ANF024	1.00	1.00	
CAP**1814A**	0.98	0.92	58CV(A.X)070-12
CAP**2414A**	1.00	0.94	58CV(A.X)070-12
CNPH*2417A**	0.99	0.93	58CV(A.X)070-12
CNPV*1814A**	0.98	0.92	58CV(A.X)070-12
CNPV*2414A**	0.99	0.93	58CV(A.X)070-12
CSPH*2412A**	0.95	0.89	58CV(A.X)070-12
CAP**2417A**	1.01	0.95	58CV(A.X)090-16
CNPH*2417A**	0.99	0.93	58CV(A.X)090-16
CNPV*2417A**	0.99	0.93	58CV(A.X)090-16
CSPH*2412A**	0.95	0.90	58CV(A.X)090-16
CAP**2417A**	1.03	0.91	58MEB040-12
CNPH*2417A**	1.02	0.90	58MEB040-12
CNPV*2417A**	1.02	0.90	58MEB040-12
CSPH*2412A**	1.03	0.91	58MEB040-12
CAP**2417A**	1.01	0.89	58MEB060-12
CNPH*2417A**	1.01	0.89	58MEB060-12
CNPV*2417A**	1.01	0.89	58MEB060-12
CSPH*2412A**	0.99	0.93	58MV(B.C)040-14
CSPH*2412A**	0.95	0.90	58MV(B.C)040-14
CAP**2417A**	1.00	0.94	58MV(B.C)060-14

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
CNPH*2417A**	0.99	0.93	58MV(B.C)060-14
CNPV*2417A**	0.99	0.93	58MV(B.C)060-14
CSPH*2412A**	0.95	0.90	58MV(B.C)060-14
CNPH*2417A**	0.99	0.93	58MV(B.C)080-14
CSPH*2412A**	0.95	0.90	58MV(B.C)080-14
CAP**1814A**	1.00	0.90	58PH*045-08
CAP**2414A**	1.02	0.92	58PH*045-08
CNPH*2417A**	1.02	0.92	58PH*045-08
CNPV*1814A**	1.00	0.90	58PH*045-08
CNPV*2414A**	1.02	0.92	58PH*045-08
CSPH*2412A**	1.02	0.92	58PH*045-08

See notes on pg. 31

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																							
		75 (23.9)				85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)			
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**			
Total	Sens†	Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†	
CFM	EWB ° F (° C)	24ACB324A30 Outdoor Section With 24 Indoor Section																							
		72 (22.2)	27.11	14.29	1.61	25.97	13.86	13.40	2.03	23.47	12.92	12.41	2.28	22.09	12.41	2.55	20.55	11.85	2.84						
		67 (19.4)	24.89	17.62	1.61	23.81	17.16	16.68	2.03	21.45	16.19	15.66	2.55	20.15	15.66	2.55	18.73	15.09	2.85						
		62 (16.7)	22.86	20.91	1.61	21.86	20.44	19.93	2.04	19.72	19.39	18.65	2.56	17.57	18.65	2.56	17.57	17.57	2.86						
		57 (13.9)	22.24	22.24	1.61	21.43	21.43	20.56	2.04	19.64	19.64	18.65	2.56	17.57	18.65	2.56	17.57	17.57	2.86						
700	72 (22.2)	27.54	14.98	1.64	26.35	14.54	14.08	2.06	23.76	13.60	13.09	2.31	22.34	13.09	2.58	20.75	12.52	2.88							
	67 (19.4)	25.31	18.74	1.64	24.19	18.29	17.81	2.07	21.75	17.31	16.77	2.59	20.42	16.77	2.59	18.96	16.19	2.88							
	62 (16.7)	23.37	22.46	1.65	22.36	21.95	21.35	2.07	20.38	20.38	19.33	2.59	18.18	19.33	2.59	18.18	18.18	2.89							
	57 (13.9)	23.14	23.14	1.65	22.28	22.28	21.36	2.07	20.38	20.38	19.33	2.59	18.18	19.33	2.59	18.18	18.18	2.89							
	52 (11.1)	22.83	23.14	1.68	21.93	21.93	20.98	2.10	20.98	20.98	19.87	2.62	18.66	19.87	2.62	18.66	18.66	2.92							
900	72 (22.2)	27.83	15.64	1.68	26.61	15.19	14.72	2.10	23.96	14.25	13.73	2.61	20.87	13.73	2.61	20.87	13.16	2.91							
	67 (19.4)	25.61	19.83	1.68	24.46	19.37	18.88	2.10	21.97	18.37	17.83	2.62	20.61	17.83	2.62	19.12	17.24	2.92							
	62 (16.7)	23.85	23.85	1.68	22.96	22.96	22.00	2.10	20.98	20.98	19.87	2.62	18.66	19.87	2.62	18.66	18.66	2.92							
	57 (13.9)	23.87	23.87	1.68	22.97	22.97	22.00	2.10	20.98	20.98	19.87	2.62	18.66	19.87	2.62	18.66	18.66	2.92							
	52 (11.1)	23.87	23.87	1.68	22.97	22.97	22.00	2.10	20.98	20.98	19.87	2.62	18.66	19.87	2.62	18.66	18.66	2.92							
COOLING INDOOR MODEL		CAPACITY		POWER	FURNACE MODEL		COOLING INDOOR MODEL		POWER	CAPACITY		COOLING INDOOR MODEL	CAPACITY		POWER	FURNACE MODEL									
		Total	Sens†		Total	Sens†	Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†	Total	Sens†						
*CAP**2414A**		1.00		1.00			0.95		0.91	58CV(A.X)110-20		0.95		0.91	58MV(B.C)060-14										
CAP**2417A**		0.99		0.99			0.96		0.90	58CV(A.X)110-20		0.96		0.89	58MV(B.C)060-14										
CAP**3014A**		1.00		1.00			0.95		0.91	58CV(A.X)135-22		0.95		0.93	58MV(B.C)080-14										
CAP**3017A**		1.00		1.00			0.96		0.90	58CV(A.X)135-22		0.96		0.90	58MV(B.C)080-14										
CNPF*2418A**		0.98		0.98			0.96		0.90	58CV(A.X)155-22		0.96		0.89	58MV(B.C)080-20										
CNPH*2417A**		0.98		0.98			1.00		0.90	58MEB040-12		1.00		0.90	58MV(B.C)100-20										
CNPH*3017A**		0.99		0.99			1.01		0.91	58MEB040-12		1.01		0.89	58MV(B.C)120-20										
CNPV*2414A**		0.98		0.98			0.99		0.91	58MEB040-12		0.99		0.90	58PH*045-08										
CNPV*2417A**		0.98		0.98			1.01		0.91	58MEB040-12		1.01		0.92	58PH*045-08										
CNPV*3014A**		0.99		0.99			0.99		0.91	58MEB040-12		0.99		0.90	58PH*045-08										
CNPV*3017A**		0.99		0.99			1.01		0.91	58MEB040-12		1.01		0.92	58PH*045-08										
CSPH*2412A**		0.96		0.96			1.00		0.90	58MEB040-12		1.00		0.90	58PH*045-08										
CSPH*3012A**		0.96		0.96			1.01		0.91	58MEB040-12		1.01		0.91	58PH*045-08										
FE4AN(B.F)003		1.00		0.94			1.00		0.90	58MEB060-12		1.00		0.91	58PH*045-08										
FE4ANF002		1.00		0.94			1.02		0.92	58MEB060-12		1.02		0.92	58PH*045-08										

See notes on pg. 31

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																	
CFM	EWB ° F (° C)	75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**
		Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†
875	72 (22.2)	33.13	17.60	2.01	31.70	17.06	2.23	30.20	16.49	2.47	28.59	15.90	2.75	26.87	15.27	3.06	25.01	14.60	3.38
	67 (19.4)	30.12	21.64	2.01	28.78	21.09	2.23	27.37	20.50	2.48	25.87	19.89	2.76	24.27	19.25	3.07	22.59	18.58	3.42
	62 (16.7)	27.50	25.68	2.01	26.29	25.09	2.23	25.03	24.47	2.48	23.75	23.75	2.77	22.56	22.56	3.08	21.27	21.27	3.43
	57 (13.9)	26.93	26.93	2.01	25.94	25.94	2.24	24.89	24.89	2.48	23.76	23.76	2.77	22.56	22.56	3.08	21.27	21.27	3.43
1000	72 (22.2)	33.69	18.46	2.05	32.21	17.92	2.27	30.64	17.34	2.52	28.98	16.74	2.80	27.20	16.10	3.11	25.32	15.44	3.45
	67 (19.4)	30.64	23.04	2.05	29.26	22.48	2.27	27.80	21.89	2.52	26.25	21.27	2.80	24.61	20.61	3.12	22.87	19.92	3.46
	62 (16.7)	28.16	27.55	2.06	26.95	26.95	2.28	25.86	25.86	2.53	24.67	24.67	2.81	23.39	23.39	3.12	22.02	22.02	3.47
	57 (13.9)	28.03	28.03	2.06	26.98	26.98	2.28	25.86	25.86	2.53	24.67	24.67	2.81	23.39	23.39	3.12	22.02	22.02	3.47
1125	72 (22.2)	34.09	19.27	2.10	32.57	18.72	2.32	30.96	18.14	2.56	29.26	17.54	2.84	27.43	16.89	3.15	25.50	16.22	3.49
	67 (19.4)	31.03	24.36	2.10	29.61	23.80	2.32	28.12	23.20	2.57	26.54	22.57	2.85	24.86	21.90	3.16	23.10	21.19	3.50
	62 (16.7)	28.94	28.94	2.10	27.83	27.83	2.32	26.66	26.66	2.57	25.40	25.40	2.85	24.06	24.06	3.16	22.61	22.61	3.48
	57 (13.9)	28.94	28.94	2.10	27.83	27.83	2.32	26.66	26.66	2.57	25.41	25.41	2.85	24.06	24.06	3.16	22.62	22.62	3.51

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	
*CAP**3014A**	1.00	1.00		
CAP**3017A**	1.00	1.00		
CAP**3614A**	1.00	1.00		
CAP**3617A**	1.00	1.00		
CAP**3621A**	1.00	1.00		
CNPF*3618A**	0.99	0.99		
CNPF*3017A**	0.99	0.99		
CNPH*3617A**	0.99	0.99		
CNVP*3014A**	0.99	0.99		
CNVP*3017A**	0.99	0.99		
CNVP*3617A**	0.99	0.99		
CNVP*3621A**	0.99	0.99		
CSPH*3012A**	0.96	0.96		
CSPH*3612A**	0.98	0.98		
FE4AN(B,F)003	1.00	0.94		
FE4AN(B,F)005	1.03	0.94		

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	
CNPF**3017A**	1.00	0.92	58MEB040-12	
CNPH**3617A**	1.00	0.92	58MEB040-12	
CNPF**3617A**	1.00	0.92	58MEB040-12	
CNPF**3617A**	1.00	0.92	58MEB040-12	
CSPH**3012A**	1.00	0.92	58MEB040-12	
CSPH**3612A**	1.00	0.90	58MEB040-12	
CAP**3017A**	1.00	0.92	58MEB060-12	
CAP**3617A**	1.00	0.92	58MEB060-12	
CNPH**3017A**	1.00	0.92	58MEB060-12	
CNPH**3617A**	1.00	0.92	58MEB060-12	
CNPF**3017A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**3617A**	1.00	0.92	58MEB060-12	
CNPF**36				

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																	
CFM	EWB ° F (° C)	75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**
		Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†
1050	72 (22.2)	40.12	21.34	2.48	38.42	20.70	2.74	36.61	20.02	3.03	34.70	19.31	3.35	32.62	18.55	3.71	30.32	17.72	4.09
	67 (19.4)	36.62	26.34	2.47	35.03	25.67	2.73	33.34	24.97	3.02	31.55	24.24	3.34	29.62	23.47	3.70	27.50	22.62	4.09
	62 (16.7)	33.54	31.31	2.46	32.11	30.61	2.72	30.61	29.86	3.01	29.06	29.06	3.34	27.62	27.62	3.70	25.99	25.99	4.09
	57 (13.9)	32.88	32.88	2.46	31.70	31.70	2.72	30.44	30.44	3.01	29.09	29.09	3.34	27.63	27.63	3.70	26.00	26.00	4.09
1200	72 (22.2)	40.72	22.34	2.54	38.96	21.69	2.80	37.09	21.00	3.09	35.11	20.28	3.41	32.97	19.51	3.76	30.60	18.67	4.15
	67 (19.4)	37.19	27.96	2.53	35.54	27.28	2.78	33.80	26.58	3.08	31.96	25.85	3.40	29.98	25.06	3.75	27.81	24.20	4.15
	62 (16.7)	34.30	33.50	2.52	32.84	32.84	2.78	31.55	31.55	3.07	30.12	30.12	3.40	28.56	28.56	3.75	26.83	26.83	4.14
	57 (13.9)	34.15	34.15	2.52	32.89	32.89	2.78	31.55	31.55	3.07	30.12	30.12	3.40	28.56	28.56	3.75	26.83	26.83	4.14
1350	72 (22.2)	41.16	23.27	2.60	39.34	22.61	2.86	37.42	21.92	3.14	35.40	21.20	3.47	33.21	20.42	3.82	30.78	19.57	4.21
	67 (19.4)	37.62	29.51	2.59	35.93	28.83	2.85	34.15	28.12	3.14	32.27	27.38	3.46	30.25	26.57	3.81	28.05	25.67	4.20
	62 (16.7)	35.18	35.18	2.58	33.86	33.86	2.84	32.45	32.45	3.13	30.95	30.95	3.46	29.31	29.31	3.81	27.50	27.50	4.20
	57 (13.9)	35.19	35.19	2.58	33.86	33.86	2.84	32.46	32.46	3.13	30.95	30.95	3.46	29.31	29.31	3.81	27.50	27.50	4.20

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL	
*CAP**3617A**		1.00	1.00			CNPH*3617A**	1.00	0.92	58MEB040-12		58MV(B,C)060-14
CAP**3614A**		0.97	0.97			CNPH*4221A**	1.00	0.92	58MEB040-12		58MV(B,C)060-14
CAP**3621A**		1.00	1.00			CNPV*3617A**	1.00	0.92	58MEB040-12		58MV(B,C)060-14
CAP**4224A**		1.00	1.00			CNPH*4217A**	1.00	0.90	58MEB040-12		58MV(B,C)060-14
CNPV*3618A**		0.99	0.99			CSPH*3612A**	1.00	0.92	58MEB040-12		58MV(B,C)060-14
CNPH*3617A**		0.99	0.99			CSPH*4212A**	1.00	0.90	58MEB040-12		58MV(B,C)060-14
CNPH*4221A**		1.00	1.00			CAP**3617A**	1.00	0.92	58MEB060-12		58MV(B,C)060-14
CNPV*3617A**		0.99	0.99			CNPH*4221A**	1.00	0.92	58MEB060-12		58MV(B,C)060-14
CNPV*3621A**		0.99	0.99			CNPV*3617A**	1.00	0.92	58MEB060-12		58PH*045-08
CNPV*4217A**		1.00	1.00			CNPH*4217A**	1.00	0.90	58MEB060-12		58PH*045-08
CNPV*4221A**		1.00	1.00			CSPH*3612A**	1.00	0.92	58MEB060-12		58PH*045-08
CSPH*3612A**		0.99	0.99			CSPH*4212A**	1.00	0.90	58MEB060-12		58PH*045-08
CSPH*4212A**		0.99	0.98			CAP**3617A**	1.00	0.92	58MEB080-12		58PH*070-16
FE4AN(B,F)003		1.00	0.94			CNPH*3617A**	0.99	0.91	58MEB080-12		58PH*070-16
FE4AN(B,F)005		1.03	0.94			CNPH*4221A**	1.00	0.92	58MEB080-12		58PH*070-16
FE4ANB006		1.04	0.95			CNPV*3617A**	0.99	0.91	58MEB080-12		58PH*070-16
FE4ANF002		0.99	0.95			CNPH*4217A**	1.00	0.90	58MEB080-12		58PH*070-16
FF1ENP036		0.99	0.99			CNPV*4217A**	1.00	0.92	58MEB080-12		58PH*070-16
FV4BN(B,F)003		1.00	0.94			CSPH*3612A**	1.00	0.92	58MEB080-12		58PH*070-16
FV4BN(B,F)005		1.03	0.94			CSPH*4212A**	1.00	0.90	58MEB080-12		58PH*070-16
FV4BNB006		1.04	0.95			CAP**3617A**	1.00	0.92	58MEB080-16		58PH*090-16
FV4BNF002		0.99	0.95			CNPH*3617A**	1.00	0.92	58MEB080-16		58PH*090-16
FX4CN(B,F)036		1.01	0.97			CNPH*4221A**	1.00	0.92	58MEB080-16		58PH*090-16
FX4CN(B,F)042		1.02	0.98			CNPV*4217A**	1.00	0.90	58MEB080-16		58PH*090-16
FY4ANF036		0.99	0.99			CSPH*3612A**	1.00	0.92	58MEB080-16		58PH*090-16
FY4ANF042		1.01	1.01			CSPH*4212A**	1.00	0.90	58MEB080-16		58PH*090-16
CAP**3614A**		0.97	0.95			CAP**3621A**	1.00	0.90	58MEB080-16		58PH*090-16
CNPH*3617A**		0.98	0.96			CNPV*3612A**	1.00	0.90	58MEB100-20		58PH*090-16
CNPH*4221A**		1.01	0.96			CAP**4221A**	1.00	0.90	58MEB100-20		58PH*110-20
CSPH*3612A**		0.98	0.93			CNPH*3617A**	0.99	0.91	58MEB100-20		58PH*110-20
CSPH*4212A**		0.98	0.98			CNPH*4221A**	1.00	0.90	58MEB100-20		58PH*110-20
CAP**3617A**		0.99	0.95			CNPV*3621A**	0.99	0.90	58MEB100-20		58PH*110-20
CNPV*3617A**		0.98	0.94			CNPH*3621A**	0.99	0.90	58MEB100-20		58PH*110-20
CNPV*4217A**		1.00	0.90			CNPH*4221A**	1.00	0.90	58MEB100-20		58PH*110-20
CAP**4224A**		1.00	0.96			CNPV*4221A**	1.00	0.90	58MEB100-20		58PH*110-20
CNPV*4221A**		1.02	0.96			CSPH*3612A**	0.98	0.93	58MEB100-20		58PH*110-20
CAP**3617A**		1.00	0.92			CSPH*4212A**	0.99	0.98	58MEB100-20		58PH*110-20

See notes on pg. 31

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR			CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																															
CFM	EWB ° F (° C)	75 (23.9)				85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)												
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh	Total Sys. KW**													
Total	Sens†	Total	Sens†				Total	Sens†				Total	Sens†				Total	Sens†				Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†					
1225	72 (22.2)	48.51	25.52	3.33	46.40	24.71	3.68	44.17	23.86	4.08	41.83	22.99	4.51	39.30	22.05	4.99	36.50	21.03	5.51															
	67 (19.4)	44.49	31.40	3.31	42.53	30.57	3.66	40.46	29.71	4.06	38.30	28.81	4.50	35.96	27.87	4.98	33.41	26.84	5.51															
	62 (16.7)	40.85	37.25	3.29	39.08	36.40	3.65	37.24	35.50	4.04	35.33	34.54	4.48	33.39	33.39	4.97	31.44	31.44	5.50															
	57 (13.9)	39.76	39.76	3.29	38.32	38.32	3.64	36.79	36.79	4.04	35.17	35.17	4.48	33.41	33.41	4.97	31.45	31.45	5.50															
	72 (22.2)	49.22	26.65	3.40	47.02	25.82	3.76	44.72	24.97	4.15	42.30	24.08	4.59	39.69	23.14	5.07	36.79	22.10	5.59															
1400	67 (19.4)	45.18	33.25	3.38	43.15	32.40	3.74	41.00	31.53	4.13	38.76	30.63	4.56	36.37	29.68	5.05	33.74	28.63	5.58															
	62 (16.7)	41.71	39.81	3.37	39.92	38.90	3.72	38.04	38.04	4.12	36.38	36.38	4.56	34.50	34.50	5.05	32.41	32.41	5.58															
	57 (13.9)	41.28	41.28	3.37	39.74	39.74	3.72	38.11	38.11	4.12	36.38	36.38	4.56	34.50	34.50	5.05	32.41	32.41	5.58															
	72 (22.2)	49.76	27.73	3.48	47.49	26.90	3.84	45.12	26.04	4.23	42.63	25.14	4.67	39.95	24.19	5.14	36.99	23.14	5.66															
	67 (19.4)	45.71	35.04	3.46	43.61	34.19	3.82	41.42	33.32	4.21	39.13	32.41	4.65	36.68	31.44	5.13	33.99	30.36	5.65															
1575	62 (16.7)	42.55	42.13	3.45	40.89	40.89	3.80	39.17	39.17	4.20	37.34	37.34	4.64	35.37	35.37	5.12	33.16	33.16	5.65															
	57 (13.9)	42.52	42.52	3.45	40.89	40.89	3.80	39.17	39.17	4.20	37.35	37.35	4.64	35.37	35.37	5.12	33.16	33.16	5.65															
24ACB342A30 Outdoor Section With 42 Indoor Section																																		
COOLING INDOOR MODEL		CAPACITY		POWER	FURNACE MODEL		COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL											
		Total	Sens†		Total	Sens†	Total	Sens†			Total	Sens†	Total	Sens†			Total	Sens†	Total	Sens†			Total	Sens†										
*CAP**4221A**		1.00		1.00			CSPH*4212A**		0.99	0.93	58MEB040-12		0.99	0.92	58MEB040-12		CSPH*4812A**		0.98	0.96	58MV(B,C)040-14		CSPH*4212A**		0.98	0.92	58MEB040-12		CSPH*4812A**		0.98	0.96	58MV(B,C)040-14	
CAP**4224A**		1.00		1.00			CSPH*4812A**		1.00	0.92	58MEB040-12		1.00	0.92	58MEB040-12		CAP**4817A**		0.98	0.93	58MV(B,C)080-14		CNPV*4217A**		0.99	0.96	58MEB080-12		CNPV*4217A**		0.99	0.96	58MV(B,C)080-14	
CAP**4817A**		0.98		0.98			CNPV*4221A**		0.99	0.94	58MEB080-12		1.00	0.94	58MEB080-12		CNPV*4221A**		0.98	0.96	58MV(B,C)080-14		CNPV*4221A**		0.98	0.96	58MEB080-12		CAP**4221A**		0.98	0.96	58MV(B,C)080-14	
CAP**4824A**		1.01		1.01			CNPV*4821A**		0.99	0.94	58MEB080-12		1.00	0.94	58MEB080-12		CNPV*4821A**		0.99	0.97	58MV(B,C)080-14		CNPV*4821A**		0.99	0.96	58MEB080-12		CAP**4824A**		0.99	0.97	58MV(B,C)080-14	
CNPV*4818A**		1.01		1.01			CNPV*4217A**		0.99	0.93	58MEB080-12		0.99	0.93	58MEB080-12		CNPV*4217A**		0.98	0.92	58PH*070-16		CNPV*4217A**		0.98	0.92	58PH*070-16		CNPV*4217A**		0.98	0.92	58PH*070-16	
CNPV*4221A**		1.00		1.00			CSPH*4212A**		0.99	0.93	58MEB080-12		0.99	0.93	58MEB080-12		CNPV*4821A**		1.00	0.92	58PH*070-16		CNPV*4821A**		1.00	0.92	58PH*070-16		CNPV*4821A**		1.00	0.92	58PH*070-16	
CNPV*4821A**		1.00		1.00			CSPH*4812A**		1.00	0.94	58MEB080-12		1.00	0.94	58MEB080-12		CAP**4817A**		0.98	0.93	58PH*070-16		CAP**4817A**		0.98	0.93	58PH*070-16		CNPV*4217A**		0.99	0.96	58PH*070-16	
CNPV*4217A**		1.00		1.00			CAP**4817A**		1.00	0.92	58MEB080-12		1.00	0.92	58MEB080-12		CNPV*4221A**		0.98	0.96	58PH*070-16		CNPV*4221A**		0.98	0.96	58PH*070-16		CNPV*4217A**		0.99	0.96	58PH*070-16	
CNPV*4824A**		1.01		1.01			CNPV*4212A**		0.99	0.93	58MEB080-12		0.99	0.93	58MEB080-12		CNPV*4812A**		1.00	0.92	58PH*070-16		CNPV*4812A**		1.00	0.92	58PH*070-16		CNPV*4824A**		1.00	0.96	58PH*070-16	
CSPH*4812A**		0.99		0.99			CSPH*4812A**		0.99	0.93	58MEB080-12		0.99	0.93	58MEB080-12		CSPH*4812A**		1.00	0.96	58PH*090-16		CSPH*4812A**		1.00	0.96	58PH*090-16		CSPH*4212A**		0.99	0.96	58PH*090-16	
FE4AN(B,F)003		0.99		0.94			CAP**4817A**		1.00	0.92	58MEB080-16		1.00	0.92	58MEB080-16		CAP**4821A**		0.99	0.93	58PH*090-16		CAP**4821A**		0.99	0.93	58PH*090-16		CAP**4821A**		0.99	0.93	58PH*090-16	
FE4AN(B,F)005		1.02		0.96			CNPV*4221A**		0.98	0.92	58MEB080-16		0.98	0.92	58MEB080-16		CNPV*4821A**		1.00	0.92	58PH*090-16		CNPV*4821A**		1.00	0.92	58PH*090-16		CNPV*4821A**		1.00	0.92	58PH*090-16	
FE4ANB006		1.04		0.95			CNPV*4812A**		1.00	0.93	58MEB080-16		1.00	0.93	58MEB080-16		CNPV*4212A**		0.98	0.92	58PH*090-16		CNPV*4212A**		0.98	0.92	58PH*090-16		CNPV*4212A**		0.98	0.92	58PH*090-16	
FV4BN(B,F)003		0.99		0.94			CSPH*4212A**		0.99	0.93	58MEB080-16		0.99	0.93	58MEB080-16		CNPV*4821A**		1.00	0.92	58PH*090-16		CNPV*4821A**		1.00	0.92	58PH*090-16		CNPV*4821A**		1.00	0.92	58PH*090-16	
FV4BN(B,F)005		1.01		0.95			CSPH*4812A**		1.00	0.92	58MEB080-16		1.00	0.92	58MEB080-16		CAP**4224A**		0.99	0.93	58PH*110-20		CAP**4224A**		0.99	0.93	58PH*110-20		CAP**4224A**		0.99	0.93	58PH*110-20	
FV4BNB006		1.04		0.95			CAP**4221A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CAP**4824A**		1.00	0.92	58PH*110-20		CAP**4824A**		1.00	0.92	58PH*110-20		CAP**4824A**		1.00	0.92	58PH*110-20	
FX4CN(B,F)042		1.01		0.99			CAP**4821A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		0.98	0.92	58PH*110-20		CNPV*4821A**		0.98	0.92	58PH*110-20		CNPV*4821A**		0.98	0.92	58PH*110-20	
FX4CN(B,F)048		1.04		0.99			CNPV*4221A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20	
FY4ANF042		1.00		1.00			CNPV*4812A**		1.00	0.92	58MEB100-20		1.00	0.92	58MEB100-20		CNPV*4821A**		0.98	0.92	58PH*110-20		CNPV*4821A**		0.98	0.92	58PH*110-20		CNPV*4821A**		0.98	0.92	58PH*110-20	
FY4ANF048		1.02		1.02			CNPV*4212A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20	
CNPV*4221A**		0.99		0.97			CNPV*4221A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20	
CNPV*4821A**		0.98		0.96			CNPV*4212A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20	
CSPH*4812A**		0.98		0.96			CSPH*4812A**		0.99	0.91	58MEB100-20		0.99	0.91	58MEB100-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20		CNPV*4821A**		1.00	0.92	58PH*110-20	
CAP**4817A**		0.99		0.93			CAP**4224A**		0.99	0.91	58MEB120-20		0.99	0.91	58MEB120-20		CSPH*4812A**		1.01	0.93	58PH*110-20		CSPH*4812A**		1.01	0.93	58PH*110-20		CSPH*4812A**		1.01	0.93	58PH*110-20	
CNPV*4217A**		0.99		0.93			CAP**4824A**		1.00	0.90	58MEB120-20		1.00	0.90	58MEB120-20		CAP**4824A**		0.99	0.93	58PH*135-20		CAP**4824A**		0.99	0.93	58PH*135-20		CAP**4824A**		0.99	0.93	58PH*135-20	
CNPV*4221A**		0.99		0.97			CNPV*4221A**		0.99	0.91	58MEB120-20		0.99	0.91	58MEB120-20		CNPV*4821A**		1.00	0.92	58PH*135-20		CNPV*4821A**		1.00	0.92	58PH*135-20		CNPV*4821A**		1.00	0.92	58PH*135-20	
CNPV*4821A**		1.00		0.96			CNPV*4212A**		0.99	0.91	58MEB120-20		0.99	0.91	58MEB120-20		CNPV*4821A**		1.00	0.92	58PH*135-20		CNPV*4821A**		1.00	0.92	58PH*135-20		CNPV*4821A**		1.00	0.92	58PH*135-20	
CSPH*4812A**		0.98		0.96			CSPH*4212A**		0.99	0.91	58MEB120-20		0.99	0.91	58MEB120-20		CNPV*4821A**																	

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																							
		75 (23.9)				85 (29.4)				105 (35)				105 (40.6)				115 (46.1)				125 (51.7)			
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**			
Total	Sens†	Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†	
CFM	EWB ° F (° C)	24ACB348A30 Outdoor Section With 48 Indoor Section																							
1400	72 (22.2)	55.04	28.49	3.35	52.62	27.54	26.56	4.20	47.38	25.54	4.72	44.49	24.45	5.30	41.25	23.26	6.01								
	67 (19.4)	49.86	34.52	3.35	47.63	33.55	32.56	4.21	42.77	31.51	4.73	40.10	30.41	5.33	37.08	29.19	6.08								
	62 (16.7)	45.26	40.60	3.35	43.30	39.77	38.91	4.22	39.15	38.04	4.74	37.27	37.27	5.34	35.05	35.05	6.09								
	57 (13.9)	44.65	44.65	3.35	42.99	42.99	41.23	4.22	39.35	39.35	4.74	37.33	37.33	5.34	35.06	35.06	6.09								
1600	72 (22.2)	56.06	29.65	3.42	53.54	28.69	27.69	4.27	48.09	26.65	4.79	45.09	25.55	5.36	41.76	24.34	6.06								
	67 (19.4)	50.79	36.35	3.42	48.45	35.38	34.36	4.28	43.40	33.30	4.80	40.63	32.17	5.39	37.50	30.93	6.14								
	62 (16.7)	46.36	43.45	3.42	44.40	42.66	41.92	4.17	40.77	40.77	4.81	38.63	38.63	5.40	36.19	36.19	6.15								
	57 (13.9)	46.41	46.41	3.42	44.64	44.64	42.77	4.28	40.78	40.78	4.81	38.63	38.63	5.43	36.19	36.19	6.15								
1800	72 (22.2)	56.83	30.71	3.49	54.22	29.73	28.72	4.34	48.61	27.66	4.85	45.53	26.54	5.43	42.11	25.32	6.12								
	67 (19.4)	51.48	38.05	3.49	49.06	37.05	36.02	4.35	43.86	34.94	4.87	41.00	33.80	5.46	37.80	32.58	6.20								
	62 (16.7)	47.45	46.27	3.50	45.69	45.69	44.03	4.36	41.94	41.94	4.88	39.69	39.69	5.47	37.12	37.12	6.21								
	57 (13.9)	47.87	47.87	3.49	46.01	46.01	44.04	4.36	41.95	41.95	4.88	39.69	39.69	5.47	37.13	37.13	6.21								

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CAP**4821A**	1.00	1.00		CSPH*6012A**	1.00	0.96	58MEB080-16
CAP**4817A**	0.99	0.99		CAP**4821A**	0.98	0.94	58MEB100-20
CAP**4824A**	1.00	1.00		CAP**6021A**	1.00	0.94	58MEB100-20
CAP**6021A**	1.02	1.02		CNPV*4821A**	0.98	0.94	58MEB100-20
CAP**6024A**	1.02	1.02		CNPV*6024A**	1.00	0.94	58MEB100-20
CNPV*4818A**	0.98	0.98		CNPV*4821A**	0.98	0.94	58MEB100-20
CNPV*4821A**	1.00	1.00		CSPH*4812A**	0.98	0.94	58MEB100-20
CNPV*6024A**	1.02	1.02		CSPH*6012A**	1.00	0.94	58MEB100-20
CNPV*4821A**	0.97	0.97		CAP**4824A**	0.99	0.95	58MEB120-20
CNPV*4824A**	1.00	1.00		CAP**6024A**	1.00	0.94	58MEB120-20
CSPH*6024A**	1.02	1.02		CNPV*4821A**	0.99	0.95	58MEB120-20
CSPH*4812A**	0.99	0.99		CNPV*4821A**	1.00	0.94	58MEB120-20
CSPH*6012A**	1.00	1.00		CNPV*6024A**	1.00	0.94	58MEB120-20
FE4AN(B,F)005	1.01	0.97		CSPH*4812A**	0.99	0.95	58MEB120-20
FE4AN(B)006	1.02	0.96		CSPH*6012A**	1.00	0.94	58MEB120-20
FV4BN(B,F)005	1.01	0.97		CAP**4821A**	0.98	0.94	58MV(B,C)080-20
FV4BN(B)006	1.02	0.96		CAP**6021A**	1.00	0.98	58MV(B,C)080-20
FV4CN(B,F)048	1.02	1.00		CNPV*4821A**	0.98	0.98	58MV(B,C)080-20
FV4CN(B,F)060	1.03	0.99		CNPV*6024A**	1.00	0.98	58MV(B,C)080-20
FV4AN(B)060	1.01	1.01		CNPV*4221A**	0.97	0.97	58MV(B,C)080-20
FV4AN(F)048	1.00	1.00		CNPV*4821A**	0.98	0.98	58MV(B,C)080-20
CAP**4817A**	0.99	0.97	58CV(A,X)090-16	CSPH*4812A**	0.97	0.97	58MV(B,C)080-20
CNPV*4821A**	0.98	0.96	58CV(A,X)090-16	CSPH*6012A**	0.98	0.96	58MV(B,C)080-20
CNPV*6024A**	1.00	0.98	58CV(A,X)090-16	CAP**4821A**	0.98	0.94	58MV(B,C)100-20
CSPH*4812A**	0.97	0.95	58CV(A,X)090-16	CNPV*4821A**	0.98	0.96	58MV(B,C)100-20
CSPH*6012A**	0.98	0.96	58CV(A,X)090-16	CNPV*6024A**	1.00	0.96	58MV(B,C)100-20
CAP**4821A**	0.98	0.96	58CV(A,X)110-20	CAP**4824A**	0.98	0.96	58MV(B,C)120-20
CAP**6021A**	1.03	1.01	58CV(A,X)110-20	CAP**6024A**	1.00	0.96	58MV(B,C)120-20
CNPV*4821A**	0.99	0.97	58CV(A,X)110-20	CNPV*4824A**	0.99	0.97	58MV(B,C)120-20
CNPV*6024A**	1.00	0.98	58CV(A,X)110-20	CNPV*6024A**	1.00	0.98	58MV(B,C)120-20
CNPV*4821A**	0.98	0.95	58CV(A,X)110-20	CSPH*6012A**	0.99	0.99	58PH*070-16
CNPV*4824A**	0.99	0.97	58CV(A,X)135-22	CSPH*6012A**	1.00	1.00	58PH*070-16
CNPV*4824A**	1.01	0.97	58CV(A,X)135-22	CAP**4821A**	0.98	0.94	58PH*090-16
CNPV*4824A**	0.99	0.97	58CV(A,X)135-22	CAP**6021A**	1.01	0.95	58PH*090-16
CNPV*4824A**	0.99	0.97	58CV(A,X)135-22	CNPV*4821A**	0.99	0.95	58PH*090-16
CNPV*6024A**	1.00	0.96	58CV(A,X)135-22	CNPV*6024A**	1.00	0.94	58PH*090-16
CAP**4817A**	0.99	0.97	58MEB080-16	CNPV*4821A**	0.99	0.95	58PH*090-16
CNPV*4821A**	0.99	0.97	58MEB080-16	CSPH*4812A**	0.99	0.95	58PH*090-16
CNPV*6024A**	1.00	0.96	58MEB080-16	CSPH*6012A**	1.00	0.94	58PH*090-16
CSPH*4812A**	0.99	0.97	58MEB080-16	CAP**4821A**	0.98	0.92	58PH*110-20

See notes on pg. 31

DETAILED COOLING CAPACITIES# CONTINUED

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																					
CFM	EWB ° F (° C)	75 (23.9)				85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)	
		Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh		Total Sys. KW**	Capacity MBtuh	Total Sys. KW**		
Total	Sens†	Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†				Total	Sens†
24ACB380A30 Outdoor Section With 60 Indoor Section																							
1750	72 (22.2)	67.65	35.66	4.15	64.56	34.48	4.58	61.30	33.25	5.06	57.89	31.98	5.58	54.20	30.63	6.15	50.10	29.15	6.77				
	67 (19.4)	62.07	43.94	4.10	59.24	42.75	4.53	56.25	41.50	5.01	53.12	40.22	5.54	49.74	38.85	6.11	46.03	37.38	6.74				
	62 (16.7)	57.01	52.17	4.06	54.45	50.95	4.49	51.79	49.66	4.97	48.04	48.27	5.50	46.34	46.34	6.08	43.50	43.50	6.72				
	57 (13.9)	55.50	55.50	4.04	53.42	53.42	4.49	51.22	51.22	4.96	48.89	48.89	5.50	46.35	46.35	6.08	43.51	43.51	6.72				
	52 (11.1)	55.50	55.50	4.04	53.42	53.42	4.49	51.22	51.22	4.96	48.89	48.89	5.50	46.35	46.35	6.08	43.51	43.51	6.72				
2000	72 (22.2)	68.69	37.30	4.26	65.46	36.09	4.69	62.07	34.85	5.16	58.54	33.56	5.69	54.71	32.19	6.26	50.48	30.69	6.87				
	67 (19.4)	63.07	46.60	4.21	60.11	45.38	4.64	57.00	44.12	5.11	53.75	42.82	5.64	50.27	41.45	6.21	46.44	39.94	6.84				
	62 (16.7)	58.17	55.80	4.16	55.57	54.47	4.59	52.95	52.95	5.07	50.49	50.49	5.61	47.78	47.78	6.19	44.74	44.74	6.82				
	57 (13.9)	57.57	57.57	4.16	55.35	55.35	4.59	52.99	52.99	5.07	50.50	50.50	5.61	47.78	47.78	6.19	44.74	44.74	6.82				
	52 (11.1)	57.57	57.57	4.16	55.35	55.35	4.59	52.99	52.99	5.07	50.50	50.50	5.61	47.78	47.78	6.19	44.74	44.74	6.82				
2250	72 (22.2)	69.44	38.83	4.36	66.10	37.62	4.79	62.61	36.36	5.27	58.97	35.06	5.79	55.04	33.67	6.36	50.70	32.16	6.97				
	67 (19.4)	63.79	49.12	4.31	60.73	47.89	4.74	57.53	46.62	5.21	54.20	45.31	5.74	50.63	43.90	6.31	46.72	42.34	6.93				
	62 (16.7)	59.18	59.18	4.27	56.90	56.90	4.70	54.41	54.41	5.18	51.77	51.77	5.72	48.91	48.91	6.30	45.70	45.70	6.93				
	57 (13.9)	59.25	59.25	4.27	56.90	56.90	4.70	54.42	54.42	5.18	51.78	51.78	5.72	48.91	48.91	6.30	45.70	45.70	6.93				
	52 (11.1)	59.25	59.25	4.27	56.90	56.90	4.70	54.42	54.42	5.18	51.78	51.78	5.72	48.91	48.91	6.30	45.70	45.70	6.93				

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	
*CAP**6024A**	1.00	1.00			CNPH*6024A**	0.97	0.97	58CV(A,X)135-22		CNPH*6024A**	0.97	0.96	58MEB120-20	
CAP**6021A**	0.98	0.98			CSPH*6012A**	0.97	0.95	58CV(A,X)135-22		CNPV*6024A**	0.97	0.96	58MEB120-20	
CNPH*6024A**	0.97	0.97			CAP**6024A**	0.98	0.97	58CV(A,X)155-22		CSPH*6012A**	0.97	0.96	58MEB120-20	
CNPV*6024A**	0.99	0.99			CNPH*6024A**	0.98	0.97	58CV(A,X)155-22		CNPH*6024A**	0.97	0.97	58PH*090-16	
CSPH*6012A**	0.98	0.98			CNPV*6024A**	0.98	0.97	58CV(A,X)155-22		CSPH*6012A**	0.97	0.97	58PH*090-16	
FE4ANB006	0.99	0.97			CSPH*6012A**	0.97	0.95	58CV(A,X)155-22		CAP**6021A**	0.97	0.97	58PH*110-20	
FV4BNB006	0.99	0.97			CNPH*6024A**	0.97	0.97	58MEB080-16		CNPH*6024A**	0.97	0.97	58PH*110-20	
FX4CN(B,F)060	1.01	1.01			CSPH*6012A**	0.97	0.97	58MEB080-16		CSPH*6012A**	0.98	0.94	58PH*110-20	
FY4ANB080	0.98	0.98			CAP**6021A**	0.97	0.96	58MEB100-20		CAP**6024A**	0.97	0.97	58PH*135-20	
CAP**6021A**	0.97	0.97			CNPH*6024A**	0.97	0.95	58MEB100-20		CNPH*6024A**	0.97	0.97	58PH*135-20	
CSPH*6012A**	0.97	0.97			CSPH*6012A**	0.97	0.96	58MEB100-20		CNPV*6024A**	0.97	0.97	58PH*135-20	
CAP**6024A**	0.98	0.98			CAP**6024A**	0.97	0.96	58MEB100-20		CNPV*6024A**	0.97	0.97	58PH*135-20	
CNPH*6024A**	0.97	0.96			CAP**6024A**	0.97	0.96	58MEB120-20		CSPH*6012A**	0.97	0.97	58PH*135-20	

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL		COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	
CNPH*6024A**	0.97	0.96	58MEB120-20		CNPH*6024A**	0.97	0.96	58MEB120-20	
CNPV*6024A**	0.97	0.96	58MEB120-20		CNPV*6024A**	0.97	0.96	58MEB120-20	
CSPH*6012A**	0.97	0.96	58MEB120-20		CSPH*6012A**	0.97	0.96	58MEB120-20	
CNPH*6024A**	0.97	0.97	58PH*090-16		CNPH*6024A**	0.97	0.97	58PH*090-16	
CAP**6021A**	0.97	0.97	58PH*110-20		CAP**6021A**	0.97	0.97	58PH*110-20	
CNPH*6024A**	0.97	0.97	58PH*110-20		CNPH*6024A**	0.97	0.97	58PH*110-20	
CSPH*6012A**	0.98	0.94	58PH*110-20		CSPH*6012A**	0.98	0.94	58PH*110-20	
CAP**6024A**	0.97	0.97	58PH*135-20		CAP**6024A**	0.97	0.97	58PH*135-20	
CNPH*6024A**	0.97	0.97	58PH*135-20		CNPH*6024A**	0.97	0.97	58PH*135-20	
CNPV*6024A**	0.97	0.97	58PH*135-20		CNPV*6024A**	0.97	0.97	58PH*135-20	
CSPH*6012A**	0.97	0.97	58PH*135-20		CSPH*6012A**	0.97	0.97	58PH*135-20	

* Tested combination.
† Total and sensible capacities are net capacities. Blower motor heat has been subtracted.
‡ Sensible capacities shown are based on 80°F (27°C) entering air at the indoor coil. For sensible capacities at other than 80°F (27°C), deduct 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree below 80°F (27°C), or add 835 Btu/h (245 kW) per 1000 CFM (480 L/S) of indoor coil air per degree above 80°F (27°C).
Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per ARI standard 210/240-94. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.
** System kw is total of indoor and outdoor unit kilowatts.
†† At TVA rating indoor condition (75°F edb/63°F ewb). All other indoor air temperatures are at 80°F edb.
NOTE: When the required data falls between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.
EWB — Entering Wet Bulb

CONDENSER ONLY RATINGS*

SST ° F (° C)		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)							
		55 (12.78)	65 (18.33)	75 (23.89)	85 (29.44)	95 (35.0)	105 (40.56)	115 (46.11)	125 (51.67)
24ACB318A30									
30 (-1.11)	TCG	15.90	15.00	14.10	13.10	12.20	11.20	10.20	9.10
	SDT	67.80	77.30	86.80	96.30	105.90	115.50	125.10	134.80
	KW	0.80	0.92	1.06	1.20	1.36	1.54	1.73	1.92
35 (1.67)	TCG	17.50	16.50	15.50	14.50	13.50	12.50	11.40	10.20
	SDT	68.80	78.20	87.70	97.20	106.70	116.20	125.80	135.40
	KW	0.80	0.92	1.05	1.20	1.36	1.54	1.73	1.94
40 (4.44)	TCG	19.20	18.20	17.10	16.00	14.90	13.80	12.60	11.40
	SDT	69.80	79.20	88.70	98.10	107.50	117.00	126.50	136.00
	KW	0.79	0.91	1.05	1.20	1.36	1.54	1.74	1.95
45 (7.22)	TCG	21.00	19.90	18.80	17.60	16.40	15.20	14.00	12.60
	SDT	70.90	80.30	89.70	99.10	108.40	117.80	127.20	136.70
	KW	0.79	0.91	1.05	1.20	1.36	1.54	1.74	1.95
50 (10.0)	TCG	22.90	21.70	20.40	19.20	17.90	16.60	15.30	13.90
	SDT	72.00	81.40	90.70	100.10	109.30	118.70	128.00	137.30
	KW	0.79	0.91	1.04	1.19	1.36	1.54	1.74	1.95
55 (12.78)	TCG	24.80	23.50	22.10	20.80	19.40	18.00	16.70	15.20
	SDT	73.10	82.50	91.80	101.10	110.30	119.50	128.80	138.00
	KW	0.78	0.90	1.04	1.19	1.36	1.54	1.74	1.95
24ACB324A30									
30 (-1.11)	TCG	21.20	20.00	18.80	17.60	16.40	15.10	13.80	12.50
	SDT	71.90	81.20	90.60	100.10	109.50	119.00	128.60	138.20
	KW	1.04	1.19	1.37	1.56	1.77	2.01	2.26	2.53
35 (1.67)	TCG	23.30	22.10	20.80	19.50	18.20	16.80	15.40	13.90
	SDT	73.20	82.50	91.80	101.10	110.50	119.90	129.40	139.00
	KW	1.03	1.19	1.37	1.56	1.77	2.01	2.27	2.54
40 (4.44)	TCG	25.60	24.20	22.90	21.50	20.00	18.60	17.10	15.50
	SDT	74.60	83.80	93.00	102.30	111.50	120.90	130.30	139.70
	KW	1.03	1.19	1.37	1.56	1.78	2.01	2.27	2.55
45 (7.22)	TCG	28.00	26.50	25.00	23.50	22.00	20.40	18.80	17.10
	SDT	76.00	85.10	94.30	103.50	112.60	121.90	131.20	140.50
	KW	1.03	1.19	1.37	1.56	1.78	2.01	2.27	2.55
50 (10.0)	TCG	30.50	28.90	27.30	25.70	24.00	22.30	20.60	18.80
	SDT	77.50	86.60	95.60	104.70	113.80	122.90	132.10	141.20
	KW	1.03	1.19	1.37	1.56	1.77	2.01	2.27	2.55
55 (12.78)	TCG	33.00	31.30	29.60	27.80	26.10	24.30	22.40	20.40
	SDT	79.00	88.00	97.00	106.00	114.90	124.00	133.00	142.00
	KW	1.03	1.19	1.37	1.56	1.77	2.01	2.27	2.55
24ACB330A30									
30 (-1.11)	TCG	24.60	23.30	22.00	20.60	19.10	17.70	16.10	14.50
	SDT	72.10	81.50	91.00	100.60	110.20	120.00	129.90	139.90
	KW	1.33	1.50	1.69	1.91	2.14	2.40	2.67	2.97
35 (1.67)	TCG	27.10	25.70	24.30	22.80	21.30	19.70	18.00	16.20
	SDT	73.40	82.70	92.20	101.60	111.20	120.90	130.70	140.60
	KW	1.34	1.51	1.70	1.91	2.14	2.40	2.69	3.00
40 (4.44)	TCG	29.80	28.30	26.80	25.20	23.50	21.80	20.00	18.20
	SDT	74.70	84.00	93.30	102.70	112.20	121.80	131.50	141.30
	KW	1.34	1.51	1.70	1.91	2.15	2.41	2.70	3.01
45 (7.22)	TCG	32.70	31.10	29.40	27.70	26.00	24.10	22.20	20.20
	SDT	76.10	85.20	94.50	103.80	113.10	122.70	132.30	142.00
	KW	1.35	1.52	1.71	1.92	2.15	2.42	2.71	3.02
50 (10.0)	TCG	35.80	34.10	32.30	30.50	28.60	26.60	24.60	22.40
	SDT	77.50	86.60	95.70	104.90	114.20	123.60	133.10	142.60
	KW	1.35	1.52	1.71	1.92	2.16	2.42	2.71	3.03
55 (12.78)	TCG	39.10	37.20	35.30	33.40	31.30	29.30	27.10	24.80
	SDT	79.00	88.00	97.00	106.10	115.20	124.50	133.90	143.30
	KW	1.36	1.53	1.72	1.93	2.16	2.42	2.71	3.03
24ACB336A30									
30 (-1.11)	TCG	31.50	29.90	28.20	26.50	24.70	22.80	20.90	18.80
	SDT	72.10	81.10	90.20	99.30	108.50	117.70	127.00	136.30
	KW	1.62	1.82	2.05	2.31	2.59	2.90	3.23	3.58
35 (1.67)	TCG	34.70	32.90	31.10	29.20	27.30	25.30	23.20	21.00
	SDT	73.70	82.50	91.50	100.50	109.60	118.70	127.90	137.10
	KW	1.63	1.83	2.06	2.32	2.60	2.91	3.25	3.61
40 (4.44)	TCG	38.10	36.20	34.20	32.20	30.10	27.90	25.70	23.30
	SDT	75.30	84.00	92.80	101.80	110.70	119.80	128.90	138.00
	KW	1.64	1.84	2.07	2.33	2.62	2.93	3.27	3.63
45 (7.22)	TCG	41.70	39.60	37.50	35.30	33.10	30.70	28.30	25.70
	SDT	77.00	85.60	94.30	103.10	112.00	121.00	129.90	138.90
	KW	1.65	1.86	2.09	2.34	2.63	2.94	3.28	3.65
50 (10.0)	TCG	45.60	43.30	41.00	38.60	36.20	33.70	31.00	28.20
	SDT	78.90	87.30	95.90	104.60	113.30	122.20	131.00	139.90
	KW	1.67	1.87	2.10	2.36	2.64	2.96	3.30	3.67
55 (12.78)	TCG	49.60	47.10	44.60	42.00	39.40	36.70	33.80	30.80
	SDT	80.80	89.10	97.50	106.10	114.70	123.40	132.10	140.80
	KW	1.69	1.89	2.12	2.38	2.66	2.97	3.31	3.68

See notes on page 33

24ACB3

CONDENSER ONLY RATINGS* CONTINUED

SST ° F (° C)		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)							
		55 (12.78)	65 (18.33)	75 (23.89)	85 (29.44)	95 (35.0)	105 (40.56)	115 (46.11)	125 (51.67)
24ACB342A30									
30 (-1.11)	TCG	38.00	36.00	33.90	31.90	29.70	27.60	25.30	22.90
	SDT	73.20	82.30	91.40	100.60	109.80	119.10	128.40	137.70
	KW	1.95	2.20	2.48	2.80	3.14	3.53	3.95	4.41
35 (1.67)	TCG	41.90	39.70	37.40	35.10	32.80	30.50	28.00	25.50
	SDT	74.80	83.70	92.80	101.90	111.00	120.20	129.40	138.60
	KW	1.97	2.22	2.50	2.81	3.16	3.54	3.97	4.43
40 (4.44)	TCG	46.00	43.60	41.10	38.70	36.20	33.60	30.90	28.10
	SDT	76.40	85.20	94.20	103.20	112.20	121.30	130.40	139.50
	KW	1.98	2.23	2.52	2.83	3.18	3.56	3.98	4.44
45 (7.22)	TCG	50.30	47.70	45.10	42.40	39.60	36.80	33.90	30.90
	SDT	78.10	86.90	95.70	104.60	113.50	122.50	131.40	140.40
	KW	2.01	2.26	2.54	2.85	3.19	3.58	4.00	4.45
50 (10.0)	TCG	54.90	52.10	49.20	46.20	43.20	40.20	37.00	33.60
	SDT	80.00	88.60	97.20	106.00	114.80	123.70	132.50	141.30
	KW	2.03	2.28	2.56	2.87	3.21	3.60	4.01	4.47
55 (12.78)	TCG	59.70	56.60	53.40	50.20	46.90	43.50	40.10	36.40
	SDT	81.90	90.30	98.90	107.50	116.20	124.90	133.60	142.20
	KW	2.06	2.30	2.58	2.89	3.23	3.62	4.03	4.48
24ACB348A30									
30 (-1.11)	TCG	41.60	39.30	37.10	34.80	32.40	30.00	27.40	24.80
	SDT	73.90	83.20	92.60	101.90	111.30	120.80	130.20	139.70
	KW	2.24	2.54	2.87	3.24	3.64	4.08	4.56	5.08
35 (1.67)	TCG	45.80	43.40	40.90	38.50	35.90	33.30	30.60	27.70
	SDT	75.40	84.70	93.90	103.20	112.50	121.90	131.30	140.70
	KW	2.25	2.55	2.88	3.25	3.66	4.10	4.59	5.11
40 (4.44)	TCG	50.30	47.70	45.10	42.40	39.60	36.80	33.90	30.90
	SDT	77.00	86.20	95.30	104.50	113.80	123.00	132.30	141.60
	KW	2.26	2.56	2.89	3.26	3.67	4.12	4.61	5.14
45 (7.22)	TCG	55.10	52.30	49.50	46.60	43.60	40.60	37.50	34.20
	SDT	78.60	87.70	96.80	105.90	115.00	124.20	133.40	142.60
	KW	2.27	2.57	2.90	3.27	3.68	4.13	4.62	5.15
50 (10.0)	TCG	60.20	57.20	54.20	51.10	47.90	44.60	41.20	37.70
	SDT	80.30	89.40	98.40	107.40	116.40	125.50	134.50	143.50
	KW	2.28	2.59	2.92	3.29	3.70	4.15	4.64	5.17
55 (12.78)	TCG	65.70	62.50	59.20	55.80	52.40	48.90	45.20	41.30
	SDT	82.10	91.10	100.00	108.90	117.80	126.80	135.70	144.50
	KW	2.30	2.60	2.94	3.30	3.71	4.16	4.65	5.18
24ACB360A30									
30 (-1.11)	TCG	53.30	50.40	47.40	44.50	41.50	38.40	35.20	31.90
	SDT	74.40	83.30	92.20	101.30	110.40	119.50	128.60	137.70
	KW	2.61	2.94	3.32	3.73	4.20	4.71	5.27	5.88
35 (1.67)	TCG	58.70	55.50	52.20	49.00	45.70	42.30	38.90	35.20
	SDT	76.10	84.90	93.70	102.70	111.70	120.70	129.70	138.70
	KW	2.65	2.98	3.36	3.77	4.24	4.75	5.31	5.91
40 (4.44)	TCG	64.30	60.80	57.30	53.80	50.20	46.50	42.60	38.60
	SDT	78.00	86.60	95.30	104.20	113.00	121.90	130.80	139.60
	KW	2.70	3.03	3.40	3.82	4.28	4.79	5.35	5.95
45 (7.22)	TCG	70.30	66.50	62.70	58.80	54.80	50.70	46.50	42.10
	SDT	79.90	88.40	97.00	105.70	114.50	123.20	132.00	140.60
	KW	2.75	3.08	3.46	3.87	4.33	4.84	5.39	5.99
50 (10.0)	TCG	76.70	72.50	68.20	64.00	59.60	55.20	50.60	45.60
	SDT	82.00	90.40	98.80	107.40	116.00	124.60	133.20	141.70
	KW	2.81	3.14	3.51	3.93	4.38	4.89	5.44	6.03
55 (12.78)	TCG	83.30	78.70	74.10	69.40	64.60	59.70	54.70	49.30
	SDT	84.20	92.40	100.70	109.10	117.50	126.00	134.40	142.70
	KW	2.87	3.20	3.57	3.98	4.44	4.94	5.48	6.07

* ARI listing applies only to systems shown in Combination Ratings table.

KW – Outdoor Unit Kilowatts Only.

SDT – Saturated Temperature Leaving Compressor (°F)

SST – Saturated Temperature Entering Compressor (°F/°C)

TCG – Gross Cooling Capacity (1000 Btuh)

GUIDE SPECIFICATIONS

GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioner unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of ARI Standard 210.
- Unit will be certified for capacity and efficiency, and listed in the latest ARI directory.
- Unit construction will comply with latest edition of ANSI/ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have c-UL-us approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils will be leak tested at 150 psig and pressure tested at 450 psig.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

PRODUCTS

Equipment

Factory assembled, single piece, air-cooled air conditioner unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge Puron® (R-410A), and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER

24ACB3

1-1/2 TO 5 NOMINAL TONS

Fans

- Condenser fan will be direct-drive propeller type, discharging air upward.
- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated bearings. Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line shutoff valve with sweat connections, vapor-line shutoff valve with sweat connections, system charge of Puron® (R-410A) refrigerant, and compressor oil.
- Unit will be equipped with high-pressure switch, low pressure switch and filter drier for Puron refrigerant.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F/°C. The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F/°C wet bulb and _____ °F/°C dry bulb, and air entering the unit at _____ °F/°C.
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.

24ACB3

