45MBFA

Floor Console Unit Ductless System
Sizes 9K to 16K

Product Data

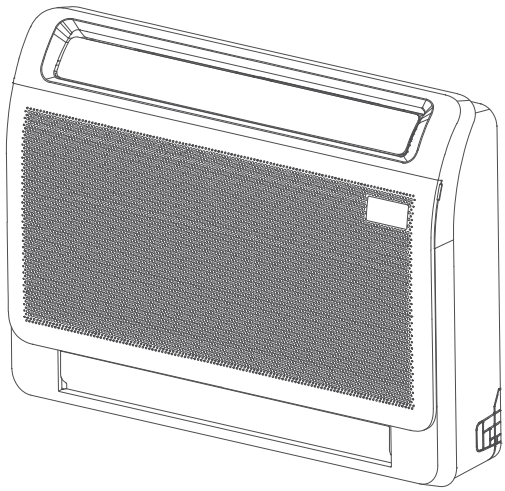

Fig. 1 – Sizes 09K to 16K

NOTE: Images are for illustration purposes only. Actual models may differ slightly.

TABLE OF CONTENTS

INDUSTRY LEADING FEATURES / BENEFITS 1
MODEL NUMBER NOMENCLATURE 3
STANDARD FEATURES AND ACCESSORIES 4
Table 1 – Features 4
Table 2 – Accessories 4
DIMENSIONS AND CLEARANCES 5
Table 3 – Dimensions and Weights 5
SPECIFICATIONS 6
Table 4 – Specifications 6
Table 5 – Compatibility 7
APPLICATION DATA 7
Table 6 – System Operating Conditions 7
WIRING 8
CONTROL SYSTEM 8
SOUND PRESSURE 9
Table 7 – Sound Pressure 9
AIR FLOW DATA 9
Table 8 – Air Flow Data 9
AIR VELOCITY AND TEMPERATURE DISTRIBUTIONS 11
WIRING DIAGRAM 13
Table 9 – Wiring Connections 13
REFRIGERANT SYSTEM DIAGRAM 13
DISPLAY FUNCTION 14
Table 10 – Console Indicators 14
BASIC FUNCTIONS 15
Table 11 – Cases 15
Table 12 – Unit Element Abbreviations 15
GUIDE SPECIFICATIONS 17

INDUSTRY LEADING FEATURES / BENEFITS

A PERFECT BALANCE BETWEEN BUDGET LIMITS, ENERGY SAVINGS AND COMFORT

The **45MBFA** series ductless system are a matched combination of an outdoor condensing unit and an indoor fan coil unit connected only by refrigerant tubing and wires.

The fan coil can be mounted on the floor or against the wall. This selection of fan coils permits creative solutions to design problems such as:

- **Add-ons to current space (an office or family room addition)**
- **Special space requirements**
- **When changes in the load cannot be handled by the existing system**
- **When adding air conditioning to spaces that are heated by hydronic or electric heat and have no ductwork**
- **Historical renovations or any application where preserving the look of the original structure is essential.**

The ideal compliment to your ducted system when it is impractical or prohibitively expensive to use ductwork.

The compact indoor fan coil units take up very little space in the room and do not obstruct windows. The fan coils are attractively styled to blend with most room decors. Advanced system components incorporate innovative technology to provide reliable cooling performance at low sound levels.

LOW SOUND LEVELS

When noise is a concern, the ductless systems are the answer. The indoor units are whisper quiet. There are no compressors indoors, either in the conditioned space or directly over it, and there is none of the noise usually generated by air being forced through ductwork.

SECURE OPERATION

If security is an issue, outdoor and indoor units are connected only by refrigerant piping and wiring to prevent intruders from crawling through ductwork. In addition, since outdoor units can be installed close to an outside wall, coils are protected from vandals and severe weather.

SIMPLE SERVICING AND MAINTENANCE

Removing the top panel on the outdoor units provides immediate access to the control compartment, providing a service technician access to check the unit's operation. In addition, the draw-thru design of the outdoor section means that dirt accumulates on the outside surface of the coil. Coils can be cleaned quickly from the inside using a pressure hose and detergent.

On all indoor units, service and maintenance expense is reduced due to easy-to-use cleanable filters. In addition, these console systems have extensive self-diagnostics and a refrigerant leak detection and mitigation system to assist in troubleshooting.

AN ELEGANT AND COMPACT DESIGN

- The look of newly-upgraded console unit features flowing lines that is aesthetic enough.
- Its unobtrusive design can easily fit into most interiors with different decorating-schemes.
- The width of the machine has been reduced by 10mm, taking less space.

A PERFECT CHOICE FOR NEW BUILDINGS AND RENOVATION PROJECTS

- Console unit can be installed standing on the floor, or wall-mounted
- It is a great option for radiator replacement in order to save your space while provide more functions.

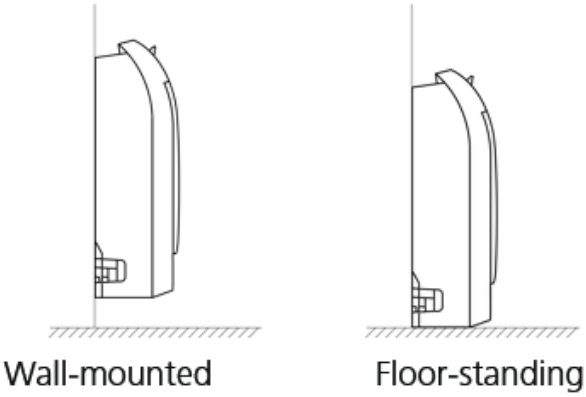

Fig. 2 – Wall-mounted vs Floor Standing

Dual Air Outlets With Larger Dimension

Efficiently improve air volume, providing constant, quick cooling and heating throughout whole year.



65.3% LARGER upper air outlet*

Dimension changes from 20.3in(516mm)*1.69in(43mm) to 25.8in(655mm)*2.2in(56mm)

Fig. 3 – Dual Air Outlets With Larger Dimension

BUILT-IN RELIABILITY

Ductless system indoor and outdoor units are designed to provide years of trouble-free operation.

The console indoor units include protection against freeze-up and high evaporator temperatures on heat pumps.

The condensing units on heat pumps are protected by a three-minute time delay before the compressor starts the over-current protection and high temperature protection.

INDIVIDUAL ROOM COMFORT

Maximum comfort is provided because each space can be controlled individually based on usage pattern. The air sweep feature provided permits optimal room air mixing to eliminate hot and cold spots for occupant comfort. In addition, year-round comfort can be provided with heat pumps.

ECONOMICAL OPERATION

The ductless system design allows individual room heating or cooling when required. There is no need to run large supply-air fans or chilled water pumps to handle a few spaces with unique load patterns. In addition, because air is moved only in the space required, no energy is wasted moving air through ducts.

EASY-TO-USE CONTROLS

The console units have microprocessor-based controls to provide the ultimate in comfort and efficiency. The user friendly wireless remote control provides the interface between user and the unit.

ACCESSORIES

Customizing these ductless systems to your application is easily accomplished. Adding a condensate pump accessory to the console fan coil provides installation flexibility.

OPTIONAL WIRED CONTROLLER

AGENCY LISTINGS

All systems are listed with AHRI (Air Conditioning, Heating & Refrigeration Institute), and ETL.

Humidity Control: Efficiently dehumidifies the air to keep your indoors at comfortable humidity level.

MODEL NUMBER NOMENCLATURE

INDOOR UNIT

45 M BFA Q 12 X A 3

45 = FAN COIL UNIT

M = MODEL

INDOOR FAN COIL TYPE
BFA = CONSOLE

SYSTEM TYPE
Q = HEAT PUMP

NOMINAL CAPACITY
09 - 9K Capacity
12 - 12K Capacity
16 - 16K Capacity

VOLTAGE
3 = 208/230-1-60

VARIATION
A = STANDARD

MAXIMUM NUMBER OF FAN COIL UNITS
THAT CAN BE CONNECTED TO THE OUTDOOR UNIT
X - Indoor Unit

Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program For verification of certification for individual products, go to www.ahridirectory.org.

A230164

STANDARD FEATURES AND ACCESSORIES

Table 1 – Features

EASE OF INSTALLATION	
Mounting Brackets	S
Low Voltage Controls	S
Floor or Wall Mounting Installation	S
COMFORT FEATURES	
Microprocessor Controls	S
Wired Remote Control	A
Wireless Remote Control	S
Humidity Sensor	S
Wi-Fi Remote Control (Dongle Only with Built-In USB)	A
Automatic Up-Down Air Sweep	S
Air Direction Control	S
Auto Restart Function	S
Cold Blow Protection On Heat Pumps	S
Freeze Protection Mode On Heat Pumps	S
Turbo Mode	S
Silence Mode	S
Auto Changeover On Heat Pumps	S
Follow Me	S
ENERGY SAVING FEATURES	
Sleep Mode	S
Stop/Start Timer	S
46° F Heating Mode (Heating Setback)	S
SAFETY AND RELIABILITY	
Indoor Coil Freeze Protection	S
Aluminum Golden Hydrophilic pre-coated fins	S
Indoor Coil High Temp Protection in Heating Mode	S
EASE OF SERVICE AND MAINTENANCE	
Cleanable Filters	S
Diagnostics	S
Liquid Line Pressure Taps	S
APPLICATION FLEXIBILITY	
Condensate Pumps	A

Legend

S - Standard

A - Accessory

Table 2 – Accessories

MODEL NO.	DESCRIPTION	FOR MODELS
KSACN1201AAA	Wired Non-Programmable Controller	All Sizes
KSACN1401AAA	Wired Programmable Controller	All Sizes
KSAIF0701AAA	Smart Kit, USB Dongle (Only with Built-In USB)	All Sizes

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

DIMENSIONS AND CLEARANCES

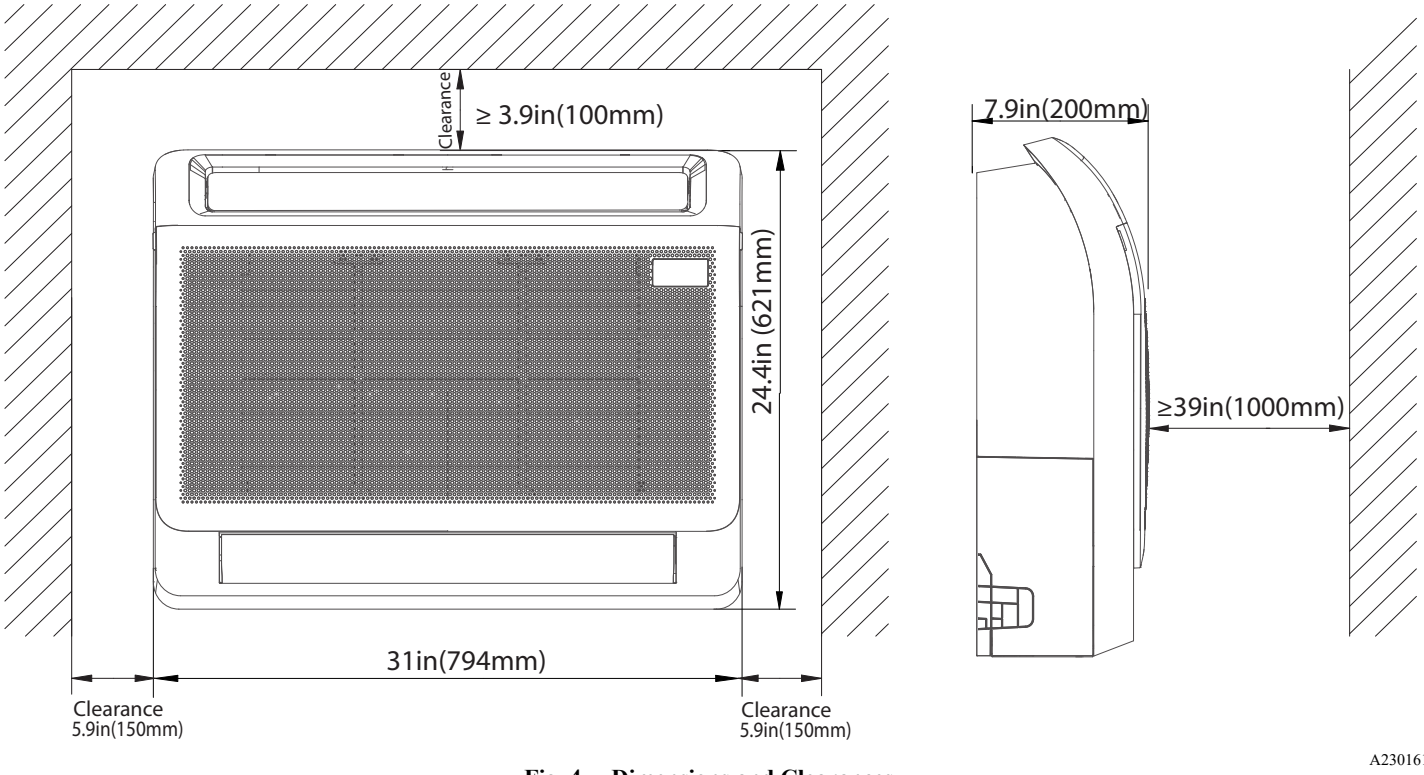

Fig. 4 – Dimensions and Clearances

Table 3 – Dimensions and Weights

SYSTEM SIZE		09K	12K	16K
		(208/230 V)	(208/230 V)	(208/230 V)
Height (H)	in (mm)	24.45 (621)	24.45 (621)	24.45 (621)
Width (W)	in (mm)	31.26 (794)	31.26 (794)	31.26 (794)
Depth (D)	in (mm)	7.87 (200)	7.87 (200)	7.87 (200)
Weight - Net	lbs. (kg)	32.85 (14.9)	32.85 (14.9)	32.85 (14.9)
PACKAGING				
Height	in (mm)	28.31 (719)	28.31 (719)	28.31 (719)
Width	in (mm)	34.06 (865)	34.06 (865)	34.06 (865)
Depth	in (mm)	11.02 (280)	11.02 (280)	11.02 (280)
Weight - Gross	lbs. (kg)	41.89 (19)	41.89 (19)	41.89 (19)

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

SPECIFICATIONS

Table 4 – Specifications

Size			9K	12K	16K
Indoor Model Number			**45MBFAQ09XA3**	**45MBFAQ12XA3**	**45MBFAQ16XA3**
Power supply		V;Ph;Hz	208/230V;1Ph;60HZ		
INDOOR FAN SPECIFICATIONS	Material	-	Fiberglass+AS		
	Type	-	GL-98*538-I		
	Diameter	inch	3.9	3.9	3.9
		mm	98	98	98
	Height	inch	21.2	21.2	21.2
		mm	538	538	538
INDOOR MOTOR SPECIFICATIONS-LOWER	Model	-	ZKFP-13-8-104		
	Type	-	DC		
	Input	W	25.0	25.0	25.0
	Max. input	W	50.0	50.0	50.0
	Output	W	18.8	18.8	18.8
	FLA	A	0.5	0.5	0.5
	Rated HP	HP	0.025	0.025	0.025
	Range of current	Amps	0.1~0.42	0.1~0.42	0.1~0.42
	Rated current	Amps	0.22	0.22	0.22
	Speed	rev/min	980/860/620	980/860/620	1100/1000/900
	Rated RPM	rev/min	980	980	1100
	Insulation class	-	E		
	Safe class	-	IPX0		
INDOOR MOTOR SPECIFICATIONS-UPPER	Model	-	ZKFP-13-8-136		
	Type	-	DC		
	Input	W	20.5	20.5	20.5
	Max. input	W	39.6	39.6	39.6
	Output	W	15.4	15.4	15.4
	FLA	A	0.5	0.5	0.5
	Rated HP	HP	0.021	0.021	0.021
	Range of current	Amps	0.2~0.38	0.2~0.38	0.2~0.38
	Rated current	Amps	0.20	0.20	0.20
	Speed	rev/min	980/860/620	980/860/620	1100/1000/900
	Rated RPM	rev/min	980	980	1100
	Insulation class	-	B		
	Safe class	-	IP20		

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Table 4 – Specifications (Continued)

Size			9K	12K	16K
Indoor Model Number			45MBFAQ09XA3	45MBFAQ12XA3	45MBFAQ16XA3
INDOOR REFRIGERANT COIL SPECIFICATIONS	Number of rows	Rows	2	2	2
	Tube outside dia.	inch	0.276	0.276	0.276
		mm	7	7	7
	Nominal Tube Wall	Inch (mm)	0.00905 (0.23)	0.00905 (0.23)	0.00905 (0.23)
	Tube Enhancement	(Yes/No)	Yes		
	Tube Material		Copper		
	Tube pitch (a) x row pitch (b)	inch	0.83x0.53	0.83x0.53	0.83x0.53
		mm	21x13.37	21x13.37	21x13.37
	Fin Spacing	FPI	20	20	20
		mm	1.3	1.3	1.3
	Fin type		Louvered		
	Fin Material		Gold hydrophilic aluminum		
	Coil length x height x width	inch	21.65x14.88x1.05	21.65x14.88x1.05	21.65x14.88x1.05
		mm	550x378x26.74	550x378x26.74	550x378x26.74
	Face area	ft2	2.24	2.24	2.24
	Number of circuits	#	2	2	2
MOISTURE REMOVAL	Dehumidifying Volume	L/h	0.81	1.48	2.18

COMPATIBILITY TABLE

Table 5 – Compatibility

UNIT	MODEL
Single Zone Compatible	37MARA
	37MAHA
Multi Zone Compatible	37MGHA
	37MGRA

APPLICATION DATA

Unit Selection

Select equipment to either match or is slightly less than the anticipated peak load. This provides better humidity control, fewer unit cycles, and less part-load operation.

For units used in spaces with high sensible loads, base equipment selection on unit sensible load, not on total anticipated load. Adjust for anticipated room wet bulb temperature to avoid undersizing equipment.

Unit Mounting (Indoor)

Refer to the unit's installation instructions for further details.

Unit leveling - For reliable operation, units should be level in all planes.

Clearance - Provide adequate clearance for airflow (Fig. 4).

Unit location - Select a location which provides the best air circulation for the room.

These units should be positioned on the floor, against the wall for the best air circulation. The unit return and discharge should not be obstructed by furniture, curtains, or anything which may cause unit short cycling or air recirculation. Place the unit in the middle of the selected wall (if possible). Use an outside wall, if available, to make piping easier, and place the unit so it faces the normal location of room occupants.

Mounting Template

Refer to the unit's installation instructions for further details.

The fan coil units are furnished with mounting to mark the location of the wiring, and refrigeration line hole locations.

Support

Adequate support must be provided to support the weight of the fan coil. Refer to "DIMENSIONS AND CLEARANCES" on page 5 and "SPECIFICATIONS" on page 6 for the fan coil weight, and the base unit dimensional drawings (in the installation instructions) for the mounting brackets location.

Table 6 – System Operating Conditions

OPERATING RANGE MIN/MAX °F (°C)		
	COOLING	HEATING
INDOOR DB	60 / 90 (17 / 32)	32 / 86 (0 / 30)

NOTE: Reference the product installation instructions for more information.

Drain Connections

Install drains to meet the local plumbing codes. If adequate gravity drainage cannot be provided, the unit should be equipped with an accessory condensate pump. Drain size is 5/8 in (16mm).

Refrigerant Lines

General Refrigerant Line Sizing:

1. The outdoor units are shipped with a full charge of r454b refrigerant.
2. Refrigerant lines should not be buried in the ground. If it is necessary to bury the lines, not more than 36-in (914 mm) should be buried. Provide a minimum 6-in (152 mm) vertical rise to the service valves to prevent refrigerant migration.
3. Both lines must be insulated. Use a minimum of 1/2-in. (12.7 mm) thick insulation. Closed-cell insulation is recommended in all long-line applications.
4. Special consideration should be given to isolating the interconnecting tubing from the building structure. Isolate the tubing so that vibration or noise is not transmitted into the structure.

WIRING

All wires must be sized per NEC (National Electrical Code) or CEC (Canadian Electrical Code) and local codes. Use Electrical Data table MCA (minimum circuit amps) and MOCP (maximum over current protection) to correctly size the wires and the disconnect fuse or breakers respectively.

Recommended Connection Method for Power and Communication Wiring:

The main power is supplied to the outdoor unit. The field supplied 14/3 stranded wire with ground with a 600 volt insulation rating, power/communication wiring from the outdoor unit to indoor unit consists of four (4) wires and provides the power for the indoor unit. Two wires are line voltage AC power, one is communication wiring (S) and the other is a ground wire. Wiring between indoor and outdoor unit is polarity sensitive. The use of BX wire is **NOT** recommended.

If installed in a high Electromagnetic field (EMF) area and communication issues exists, a 14/2 stranded shielded wire can be used to replace L2 and (S) between outdoor unit and indoor unit landing the shield onto ground in the outdoor unit only.

⚠ CAUTION

EQUIPMENT DAMAGE HAZARD

Failure to follow this caution may result in equipment damage or improper operation.

Wires should be sized based on NEC and local codes.

⚠ CAUTION

EQUIPMENT DAMAGE HAZARD

Failure to follow this caution may result in equipment damage or improper operation.

Be sure to comply with local codes while running wire from the indoor unit to the outdoor unit.

Every wire must be connected firmly. Loose wiring may cause the terminal to overheat or result in unit malfunction. A fire hazard may also exist. Ensure all wiring is tightly connected.

No wire should touch the refrigerant tubing, compressor or any moving parts.

Disconnecting means must be provided and shall be located within sight and readily accessible from the air conditioner.

Connecting cable with conduit shall be routed through the hole

CONTROL SYSTEM

The unit is equipped with a microprocessor control to perform two functions:

1. Provide safety for the system
2. Control the system and provide optimum levels of comfort and efficiency.

The main microprocessor is located on the control board of the fan coil unit (outdoor units have a microprocessor too) with thermistors located in the fan coil air inlet and on the indoor coil.

Heat pump units have a thermistor on the outdoor coil. These thermistors monitor the system operation to maintain the unit within acceptable parameters and control the operating mode.

Wireless Remote Control

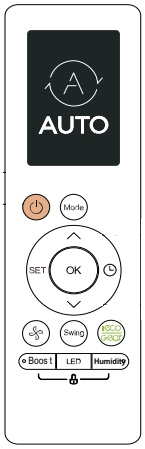

Fig. 5 – Wireless Remote Controller (RG10L5)

1. A wireless remote control is supplied for system operation of the console units.
2. Each battery operated wireless (infrared) remote control may be used to control more than one unit.

Wired Remote Control (Optional)

Fig. 6 – Wired Controller

1. Optional wired remote controller used for system operation of all console units.
2. Kit includes a wired remote controller and a connecting cable.
3. Connect the wire terminal between the remote controller and the indoor unit.
4. Displays in °F or °C and temperature increments every 1°F increment/0.5°C increment.

NOTE: Extension wire available through RCD

Part Number: 17401204000769

SOUND PRESSURE

Table 7 – Sound Pressure

SYSTEM SIZE		09K	12K	16K
Indoor Sound Pressure Level	Turbo/High/Medium/Low/Silent	45/41.0/37.5/25.5/22.00	44/40.5/37.0/26.5/24.00	47/43.5/40.5/30.5/25.5

SOUND PRESSURE TESTING METHOD

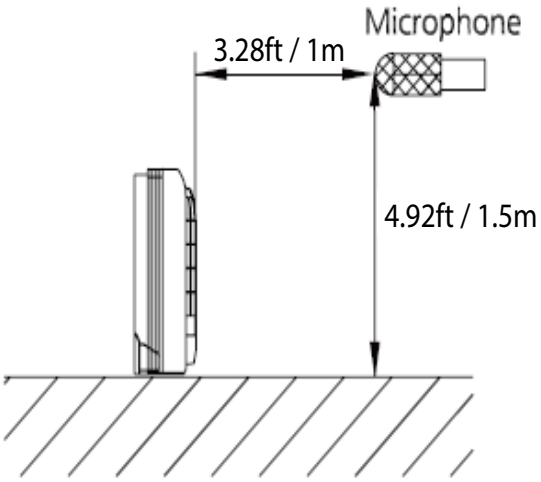

A230169

Fig. 7 – Sound Pressure Testing Method

AIR FLOW DATA

Table 8 – Air Flow Data

SYSTEM SIZE		09K	12K	16K
Indoor (CFM)	Turbo/High/Medium/Low/Silent	441.45 / 376.70 / 323.73 / 188.35 / 129.49	441.45 / 376.70 / 323.73 / 188.35 / 129.49	500.31 / 441.45 / 382.59 / 323.73 / 206.01

NC Curves

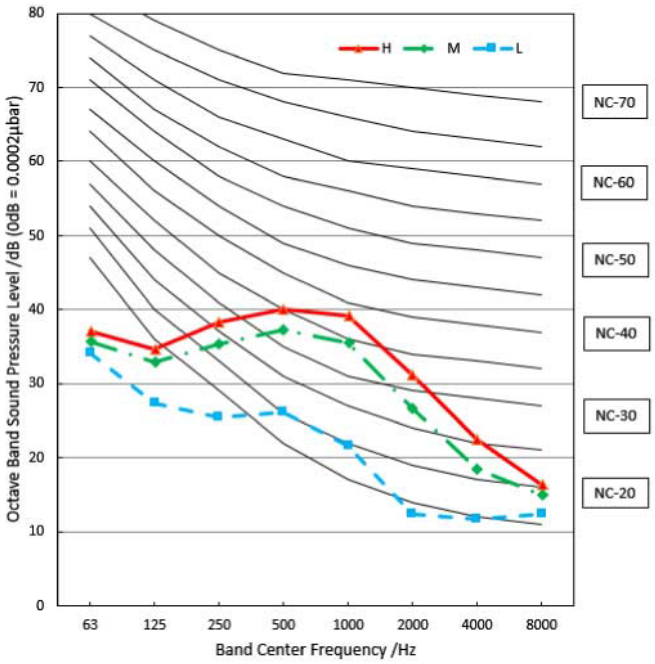

Fig. 8 – Size 9

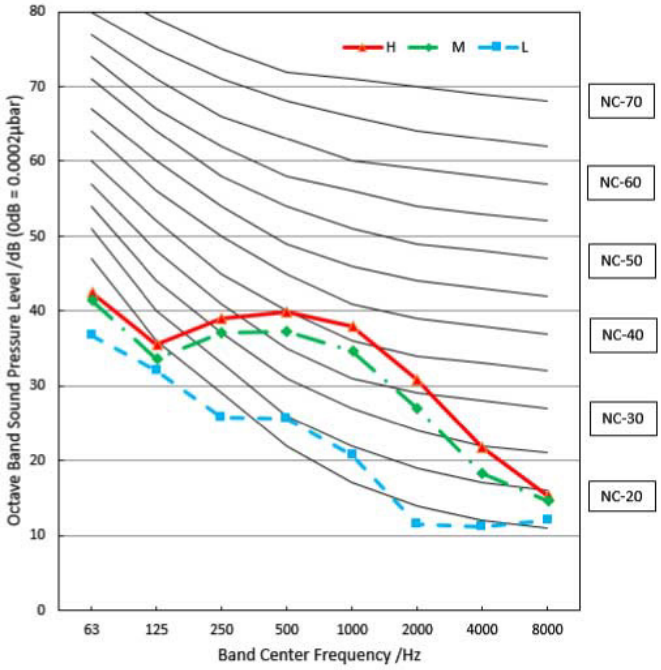

Fig. 9 – Size 12

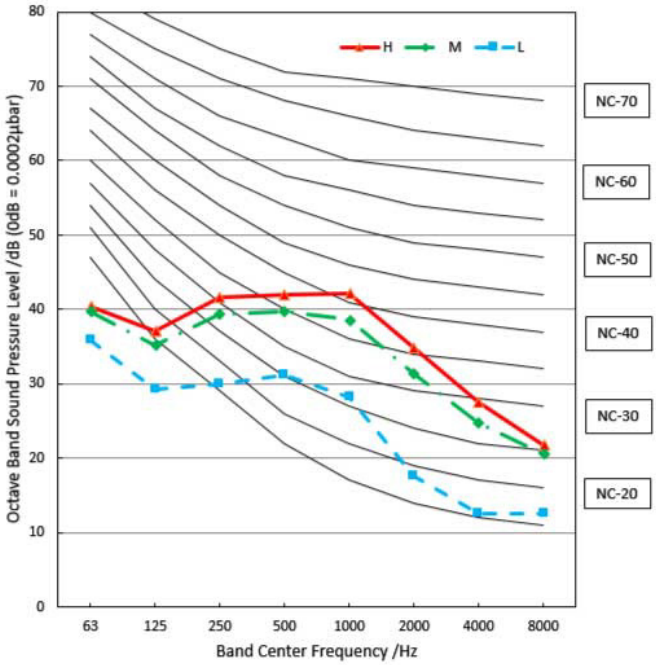

Fig. 10 – Size 16

AIR VELOCITY AND TEMPERATURE DISTRIBUTIONS

Discharge Angle 70°(Upper)/ 0°(Lower)

NOTE: Air Velocity and Temperature Plots will be updated in Imperial Units in next revision of this document.

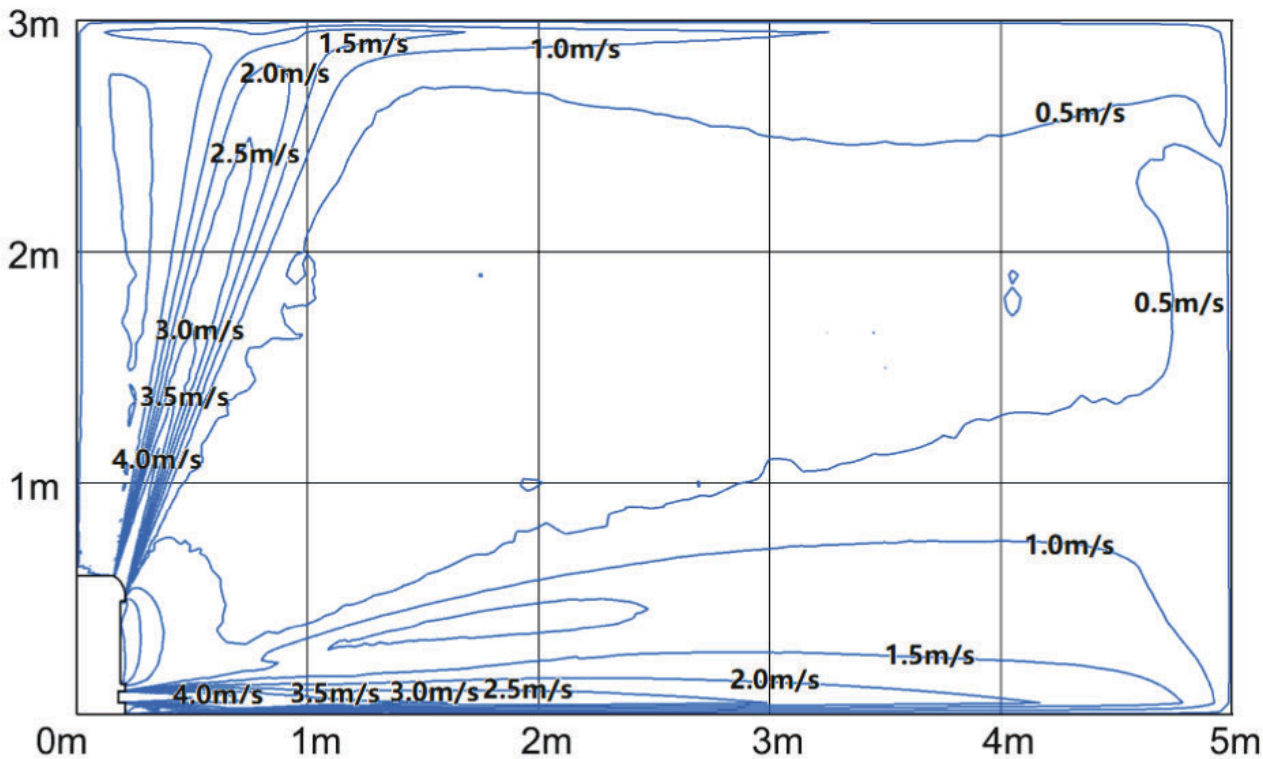

Fig. 11 – Cooling airflow velocity distributions

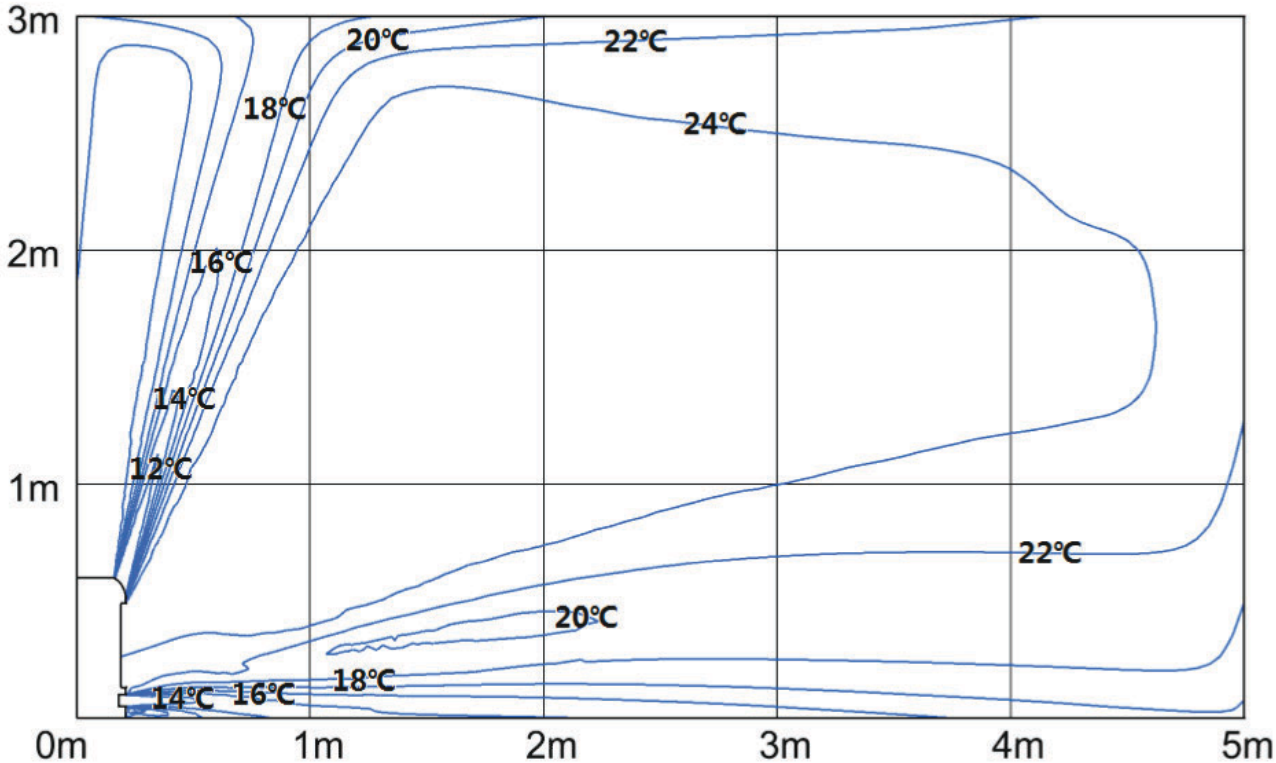

Fig. 12 – Cooling temperature distributions

Discharge Angle 20°(Upper)/ 0°(Lower)

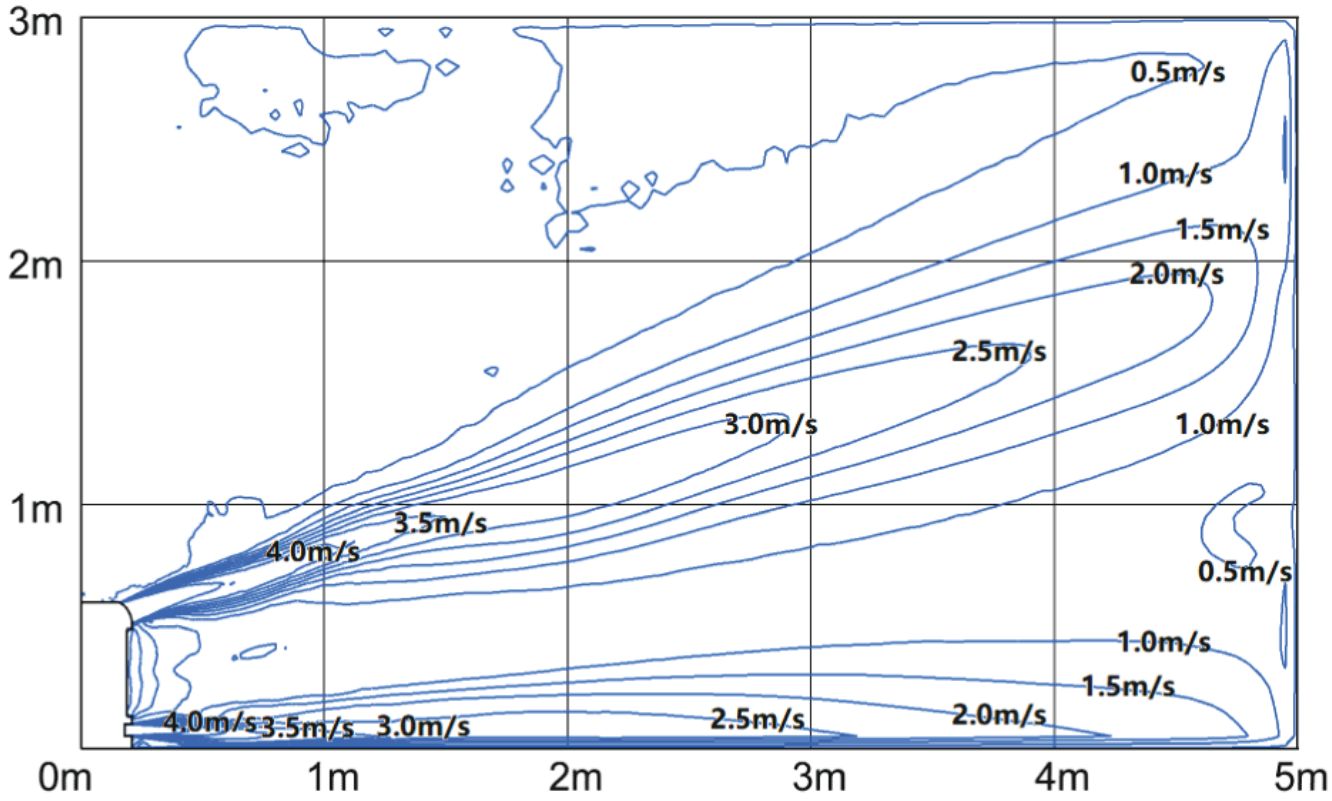

Fig. 13 – Heating airflow velocity distributions

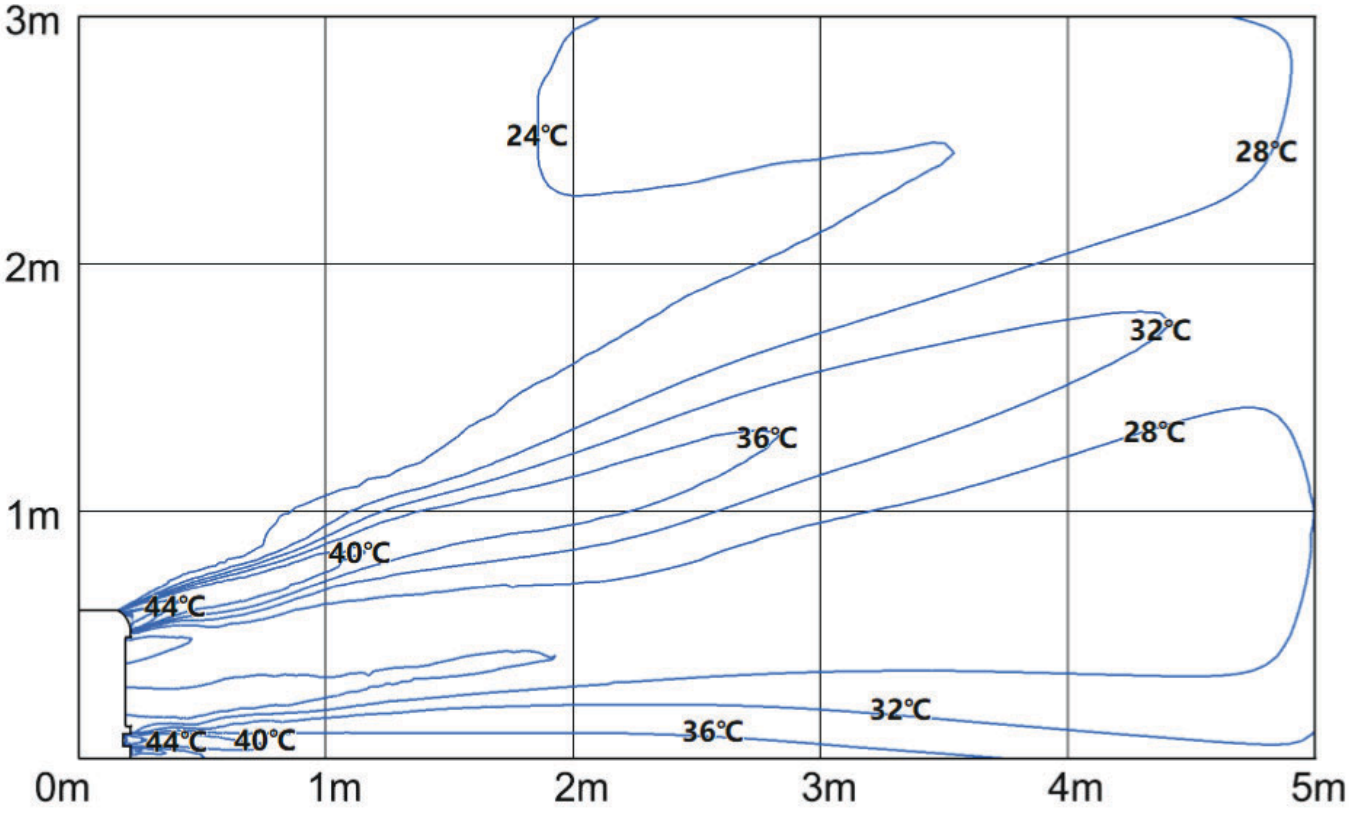

Fig. 14 – Heating temperature distributions

WIRING DIAGRAM

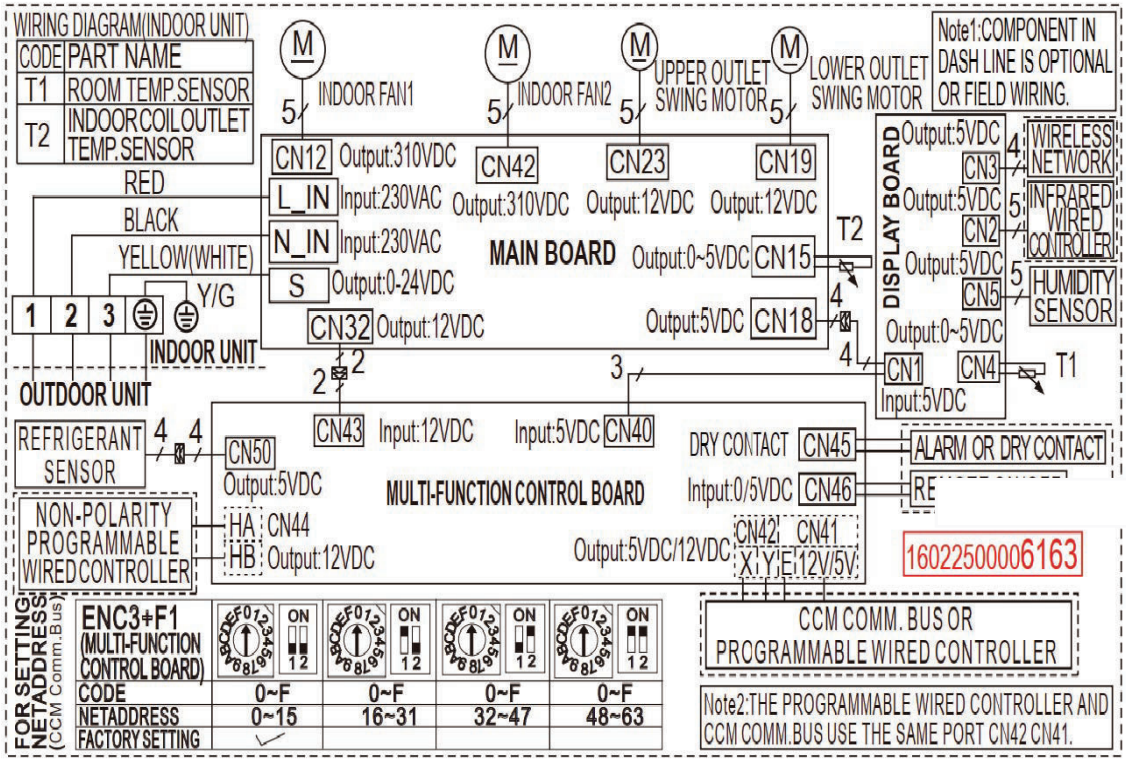

Fig. 15 – Wiring Diagram Sizes 09K, 12K, 16

Table 9 – Wiring Connections

System Size	9K	12K	16K
V-Ph-Hz	208/230-1-60		
Power Supply	4-Wire: includes ground wire (Outdoor); 208/230V-1Ph-60Hz		
Interconnection to Indoor Unit	Yes		
Shielded Wire (Yes/No)	Yes		

REFRIGERANT SYSTEM DIAGRAM

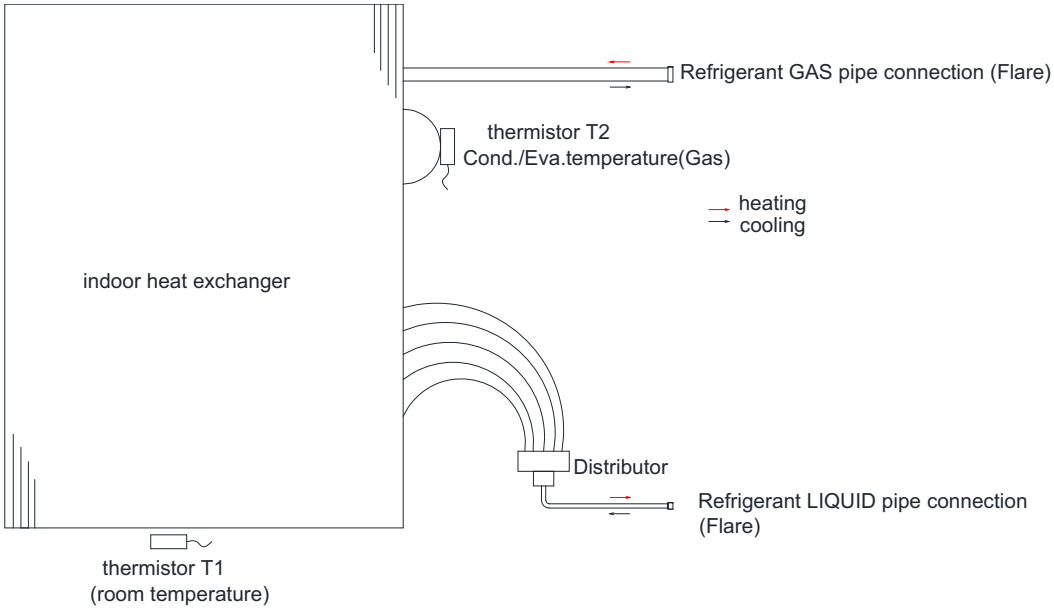

Fig. 16 – Refrigerant System Diagram

DISPLAY FUNCTION

NEW CONSOLE TYPE

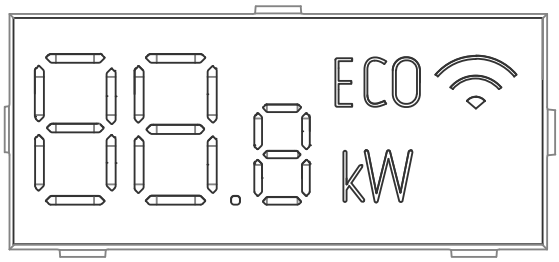

Fig. 17 – Console

Table 10 – Console Indicators

DISPLAY		FUNCTION
ECO		ECO function (available on select units only)
		When Wireless Control feature is activated (some units)
88.8	Temperature Value	Temperature
	ON (3s)	Timer ON is set. Activation of Swing, Boost, Silence or UV-C lamp
	OF (3s)	Timer OFF is set. Cancellation of Swing, Boost, Silence or UV-C lamp
	dF	Defrost
	CL	Active Clean
	FP	Heating in room temperature under 46°F(8°C)

SAFETY FEATURES

Compressor three-minute delay at restart

Compressor functions are delayed for up to ten seconds upon the first startup of the unit, and are delayed for up to three minutes upon subsequent unit restarts.

Automatic shutoff based on discharge temperature

If the compressor discharge temperature exceeds a certain level for nine seconds, the compressor ceases operation.

Inverter module protection

The inverter module has an automatic shutoff mechanism based on the unit's current, voltage, and temperature. If automatic shutoff is initiated, the corresponding error code appears on the indoor unit and the unit ceases operation.

Indoor fan delayed operation

- When the unit starts, the louver is automatically activated and the indoor fan operates after a period of setting time or the louver is in place.
- If the unit is in heating mode, the indoor fan is regulated by the anti-cold wind function.

Compressor preheating

Preheating is automatically activated when T4 sensor is lower than setting temperature of outdoor air (35°F / 2°C).

Sensor redundancy and automatic shutoff

- If one temperature sensor malfunctions, the air conditioner continues operation and displays the corresponding error code, allowing for emergency use.
- When more than one temperature sensor is malfunctioning, the air conditioner ceases operation.

BASIC FUNCTIONS

Table 11 – Cases

Functions		AUTO MODE
Cases		Case 3
Models	09K-16K	Ö

Table 12 – Unit Element Abbreviations

ABBREVIATION	ELEMENT
T1	Indoor room temperature
T2	Coil temperature of evaporator
T3	Coil temperature of condenser
T4	Outdoor ambient temperature
TP	Compressor discharge temperature
Tsc	Adjusted setting temperature
CDIFTEMP	Cooling shutdown temperature
HDIFTEMP2	Heating shutdown temperature

NOTE: Within this manual, CDIFTEMP, HDIFTEMP2...etc., are EEPROM parameters.

FAN MODE

When fan mode is activated:

- The outdoor fan and compressor stop.
- Temperature control is disabled and no temperature setting is displayed.
- The indoor fan speed can be set to 1%~100% and auto.
- The louver operations are identical to those in the **COOLING** mode.
- **AUTO** fan: In fan-only mode, AC operates the same as **AUTO** fan in **COOLING** mode with the temperature set at 75°F(24°C).

COOL MODE

Indoor Fan Control

1. In the **COOLING** mode, the indoor fan operates continuously. The fan speed can be set to 1%-100%, or low, medium, high and auto.
2. Auto fan action in the **COOLING** mode:

- **Descent curve**
  When T1-Tsc is lower than to 6.3°F/3.5°C, fan speed reduces to 80%;
  When T1-Tsc is lower than to 1.8°F/1°C, fan speed reduces to 60%;
  When T1-Tsc is lower than to 0.9°F/0.5°C, fan speed reduces to 40%;
  When T1-Tsc is lower than to 0°F/0°C, fan speed reduces to 20%;;
  When T1-Tsc is lower than to -0.9°F/-0.5°C, fan speed reduces to 1%;.
- **Rise curve**
  When T1-Tsc is higher than or equal 0°F/0°C, fan speed increases to 20%;;
  When T1-Tsc is higher than or equal 0.9°F/0.5°C/, fan speed increases to 40%;
  When T1-Tsc is higher than or equal 1.8°F/1°C,, fan speed increases to 60%;
  When T1-Tsc is higher than or equal 2.7°F/1.5°C, fan speed increases to 80%;
  When T1-Tsc is higher than or equal 7.2°F/4°C, fan speed increases to 100%.

CONDENSER TEMPERATURE PROTECTION

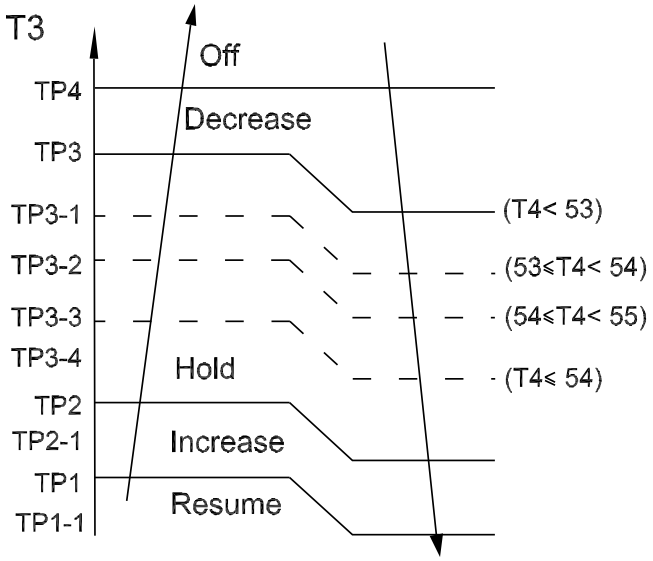

Fig. 18 – Condenser Temperature Protection

When the condenser temperature exceeds a configured value, the compressor ceases operation.

EVAPORATOR TEMPERATURE PROTECTION

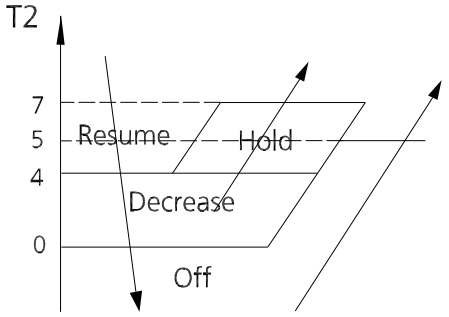

Fig. 19 – Evaporator Temperature Protection

- **Off:** Compressor stops.
- **Decrease:** Decrease the running frequency to the lower level per 1 minute.
- **Hold:** Keep the current frequency.
- **Resume:** No limitation for frequency.

HEATING MODE (HEAT PUMP UNITS)

Indoor Fan Control:

1. In the **HEATING** mode, the indoor fan operates continuously. The fan speed can be set to 1%-100% and auto.

- **Anti-cold air function**
- **If the temperature difference of T2 changes during AUTO fan and causes the fan speed to change, run the current fan speed for 30 seconds first, the default interval is the interval before the fan speed changes, and then judge T2 according to the current interval after 30 seconds to get the final anti-cold air interval.**

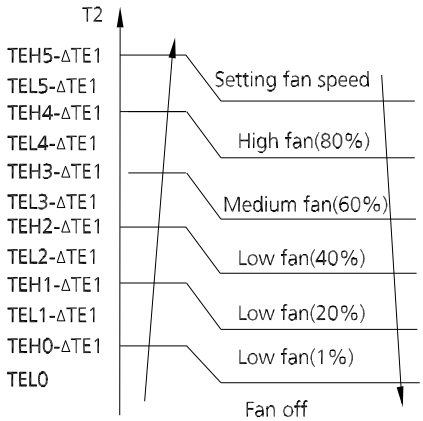

Fig. 20 – Anti-cold air function

ΔTE1=0

2. Auto fan action in the **HEATING** mode:

- **Rise curve**
  When T1-Tsc is higher than -2.7°F/-1.5°C,, fan speed reduces to 80%;
  When T1-Tsc is higher than 0°F/0°C, fan speed reduces to 60%;
  When T1-Tsc is higher than 0.9°F/0.5°C, fan speed reduces to 40%;
  When T1-Tsc is higher than 1.8°F/1°C, fan speed reduces to 20%.
- **Descent curve**
  When T1-Tsc is lower than or equal to 0.9°F/0.5°C, fan speed increases to 40%;
  When T1-Tsc is lower than or equal to 0°F/0°C, fan speed increases to 60%;
  When T1-Tsc is lower than or equal to - 2.7°F/-1.5°C/,, fan speed increases to 80%;
  When T1-Tsc is lower than or equal to -5.4°F/-3°C, fan speed increases to 100%.

EVAPORATOR COIL TEMPERATURE PROTECTION

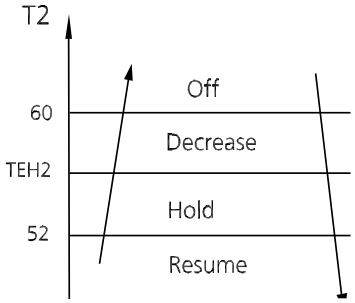

Fig. 21 – Evaporator Coil Temperature Protection

- **Off:** Compressor stops.
- **Decrease:** Decrease the running frequency to the lower level per 20 seconds.
- **Hold:** Keep the current frequency.
- **Resume:** No limitation for frequency.

AUTO-MODE

- **AUTO-MODE can be selected with the remote controller and the temperature setting can be adjusted between 60°F/16°C~86°F/30°C.**

In **AUTO-MODE**, the unit selects **COOLING**, **HEATING** or **FAN-ONLY** mode on the basis of T1,Ts, outdoor ambient temperature(T4) and relative humidity (φ).

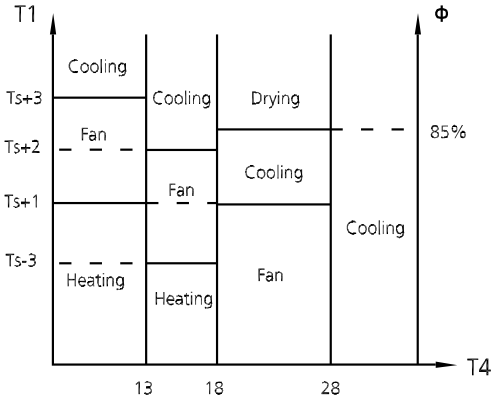

Fig. 22 – Auto-Mode

GUIDE SPECIFICATIONS

FLOOR CONSOLE UNIT DUCTLESS SYSTEM

Size Range: 0.75 to 1.33 Ton Nominal Cooling and Heating Capacity

Model Number:**45MBFA**

Part 1 - GENERAL

1.01 System Description

Indoor console, direct-expansion fan coils are matched with a cooling only or heat pump outdoor unit.

1.02 Agency Listings

Unit is rated per AHRI Standards 210/240 and listed in the AHRI directory as a matched system.

1.03 Delivery, Storage, And Handling

Units stored and handled per the unit manufacturer's recommendations.

1.04 Warranty (For Inclusion By Specifying Engineer)

Part 2 - PRODUCTS

2.01 Equipment

A. General:

Indoor, direct-expansion, floor-mounted fan coil. Unit is complete with a cooling/heating coil, fan, fan motor, piping connectors, electrical controls, microprocessor control system, and integral temperature sensing. Unit is furnished with an integral mounting bracket and mounting hardware.

B. Unit Cabinet:

Cabinet discharge and inlet grilles are attractively styled, high-impact polystyrene. Cabinet is fully insulated for improved thermal and acoustic performance.

C. Fans:

1. Fan is the tangential direct-drive blower type with an air intake in the center of the unit and discharge at the top and bottom front. An automatic, motor-driven vertical air sweep is provided standard.
2. Air sweep operation is user selectable. The vertical sweep may be adjusted (using the remote control) and the horizontal air direction may be set manually.

D. Coil:

Coil is a copper tube with aluminum fins and galvanized steel tube sheets. Fins are bonded to the tubes by mechanical expansion and specially golden hydrophilic pre-coated for enhanced wet-ability. A drip pan under the coil has a drain connection for hose attachment to remove condensate. The condensate pan has an internal trap.

E. Motor:

The motor has an open drip-proof, permanently lubricated ball bearing with inherent overload protection. The fan motor has 4-speeds.

F. Controls:

Controls consist of a microprocessor-based control system which controls the space temperature, determines the optimum fan speed, and runs self diagnostics. The temperature control ranges from 62°F to 86°F (17°C to 30°C) in increments of 1°F or 1°C, and have 46°F Heating Mode (Heating Setback). The wireless remote controller has the ability to act as the temperature sensing location for room comfort.

The unit has the following functions as a minimum:

1. An automatic restart after power failure at the same operating conditions as at failure.
2. A timer function to provide a minimum 24-hour timer cycle for system Auto Start/Stop.
3. Temperature-sensing controls to sense the return air temperature.
4. Indoor coil freeze protection.
5. Wireless infrared remote control to enter set points and operating conditions.
6. Automatic air sweep control to provide on or off activation of air sweep louvers.
7. Dehumidification mode to provide increased latent removal capability by modulating system operation and set point temperature.
8. Fan-only operation to provide room air circulation when no cooling is required.
9. Diagnostics to conduct continuous checks of unit operation and warn of possible malfunctions. Error messages appear on the unit.
10. Fan speed control is user-selectable: high, medium, low, or microprocessor controlled automatic operation during all operating modes.
11. Automatic heating-to-cooling changeover in heat pump mode. Control includes a deadband to prevent rapid mode cycling between heating and cooling.
12. Indoor coil high temperature protection is provided to detect excessive indoor discharge temperature when the unit is in heat pump mode.

G. Filters:

Unit has a filter track with factory-supplied cleanable filters.

H. Electrical Requirements:

Indoor fan motor to operate on 208-230V as specified. Power is supplied from the outdoor unit.

I. Operating Characteristics:

The **45MBFA** system has a minimum SEER (Seasonal Energy Efficiency Ratio) and HSPF at AHRI conditions, as listed on the specifications table of the outdoor unit.

J. Refrigerant Lines:

All units should have refrigerant lines that can be oriented to connect from the left, right or back of unit. Both refrigerant lines need to be insulated.

K. Refrigerant Leak Detection and Mitigation

System comes with a Refrigerant Leak Protection System.

NOTES:

© 2026 Carrier. All rights reserved.

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.