

Floor Console Heat Pump Ductless System

Indoor Model: 40MBQB12F--3



Submittal Data

Job Data:		Location:	
Buyer:		Buyer P.O. #:	
		Carrier #:	
Unit Number:		Model Number:	
Performance Data Certified By:		Date:	



Performance
SERIES

STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Timer
- Auto-Restart
- Follow Me
- 46°F Heating Mode (Heating Setback)

CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (optional)

System	Size		12
	Indoor Model		40MBQB12F--3
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply Indoor unit powered by outdoor unit		
	MCA	A.	0.29
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
	Wired Remote Controller (°F/°C Convertible)		Optional
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	1/2 (12.7)

Indoor Coil	Face Area	Sq. Ft.	2.1
	No. Rows		2
	Fins per inch		19
	Circuits		2
Indoor	Unit Width	in (mm)	27.56 (700)
	Unit Height	in (mm)	8.27 (210)
	Unit Depth	in (mm)	23.62 (600)
	Net Weight	lbs (kg)	32.41 (14.7)
	Number of Fan Speeds		3
	Airflow (lowest to highest)	CFM	220/250/280
	Sound Pressure (lowest to highest)	dB(A)	34/41/45

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

Accessories


53DS-900---118	Condensate Pump (230v)
KSACN0101AAA	Wired Remote Control with Timer Function
53DS-900---008	Insulated 25' Line Set - 1/4" x 1/2"

Compatibility Table

Indoor Unit	40MBQB12F--3
Outdoor Unit	38MAQB12R--3
	38MAQB12---3
	38MGQC18---3
	38MGQD27---3
	38MGQF36---3
	38MGQF48---3

Construction View

Indoor Model: 40MBQB12F--3

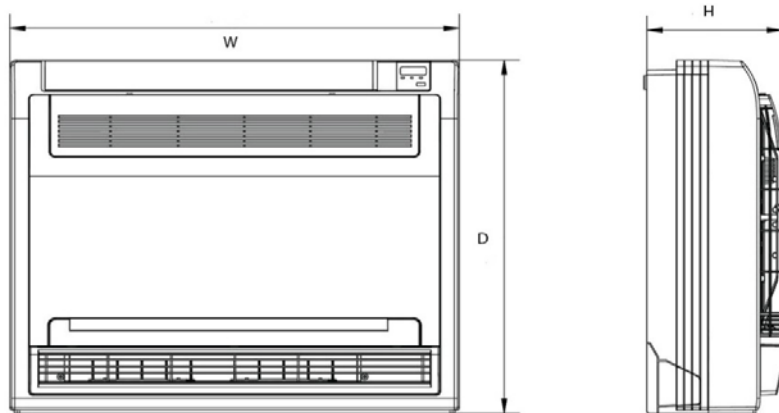

Unit Width	in (mm)	27.56 (700)
Unit Height	in (mm)	8.27 (210)
Unit Depth	in (mm)	23.62 (600)
Net Weight	lbs (kg)	32.41 (14.7)

