




Product Data

58WAV Weathermaker® 8000 High-Efficiency Upflow Furnace

Heating Capacities:
45,000 — 155,000 Btuh

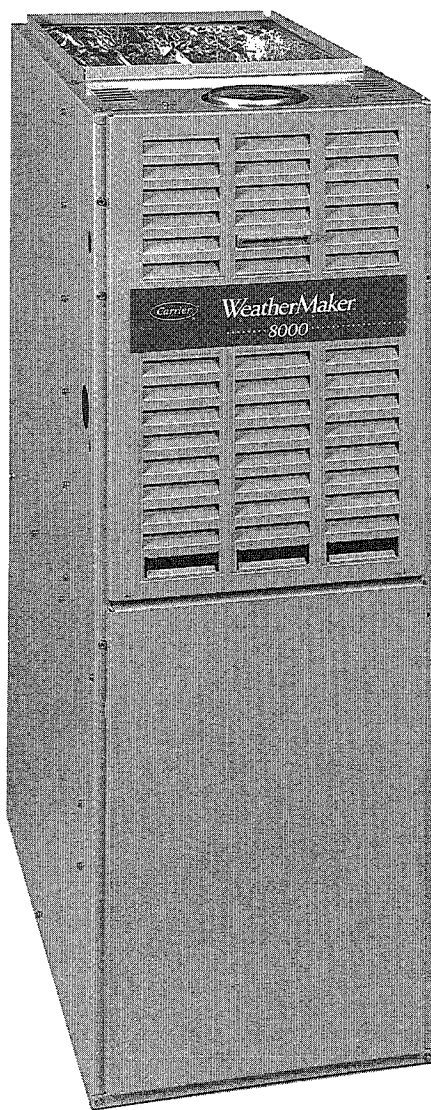

Advanced Technology for High-Efficiency Gas Furnaces

Carrier leads the industry with its new Weathermaker® 8000 Induced-Draft Gas Furnace. This furnace is built with the most advanced manufacturing equipment, processes, and technology available in order to ensure top quality. Packed into the cabinet are the industry's foremost dealer and homeowner features. The 58WAV Upflow Furnace is the newest addition to Carrier's list of product leadership in the gas furnace industry.

These induced-combustion, gas-fired furnaces offer not only low installation costs, but fuel economy as well — delivering an Annual Fuel Utilization Efficiency (AFUE) rating of 80.0%. The Carrier Weathermaker 8000 utilizes a hot surface, silicon carbide ignition system to save energy and increase reliability.

Our design uses the patented S-shaped 4-pass heat exchanger, a new soft mount inducer assembly, and a slow opening gas valve to improve sound level. The Super-S heat exchanger provides better heat transfer while enabling us to make a compact furnace. This provides more room in closet, utility room, and short basement installations. The heat exchanger is constructed of aluminized steel and is backed by a 20-year Limited Warranty.

The Carrier Weathermaker 8000 Gas Furnace will meet your home heating requirements. This furnace family provides the widest range of heating capacities available.

The superior attention to cabinet detail is obvious. The Carrier


Weathermaker 8000 features 1-piece, seamless, wrap-around construction. There are no spot welds on the exterior surfaces of the Weathermaker 8000 Furnace. There is also double protection for the cabinet. First, a galvanized steel substrate provides resistance to rusting; then the cabinet is constructed of prepainted steel — the same high-quality finish found on refrigerators and dishwashers.

Perhaps the most advanced feature of the Weathermaker 8000 is the microprocessor control center. The simplified electronics in this control board provide high reliability

while performing many of the functions of older, electro-mechanical devices in other furnaces. Advanced features of the board show true leadership in furnace technology. The control board provides blower delay at start-up and shutdown, while monitoring furnace operations and functions. In the unlikely event of a service call, in less than a minute the technician can use the self-test feature to determine if a major component has failed. The control board will check itself, then the inducer, silicon carbide ignition, low- and high-speed blower, and the humidifier connections. The control


board also features a 3-amp fuse that protects the transformer and control board.

Best of all, the Carrier Weathermaker 8000 is made to be easily installed. Many features make this furnace the easy choice for replacement or new construction markets. Left and right connections are provided for gas and electrical supplies. An easy-to-remove bottom, blower speed selector, cased or uncased cooling coils, low-voltage, humidifier, and electronic air cleaner terminal connections are among other features.

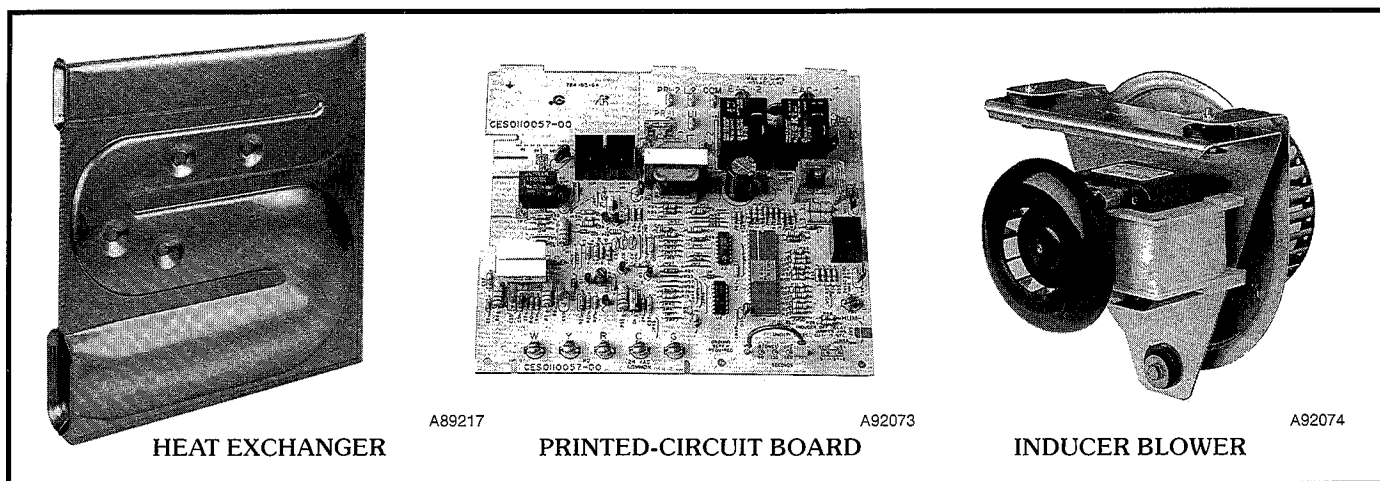

Model number nomenclature

58WAV		045	111	08	
High-Efficiency Induced-Combustion Upflow Furnace				Cooling Size (Airflow) (400 CFM per 12,000 Btuh)	
				08 — 800 CFM 12 — 1200 CFM 14 — 1400 CFM 16 — 1600 CFM 20 — 2000 CFM	
Input Capacity				Series Number	
045 — 44,000 Btuh	111 — 110,000 Btuh				
070 — 66,000 Btuh	136 — 132,000 Btuh				
091 — 88,000 Btuh	155 — 154,000 Btuh				

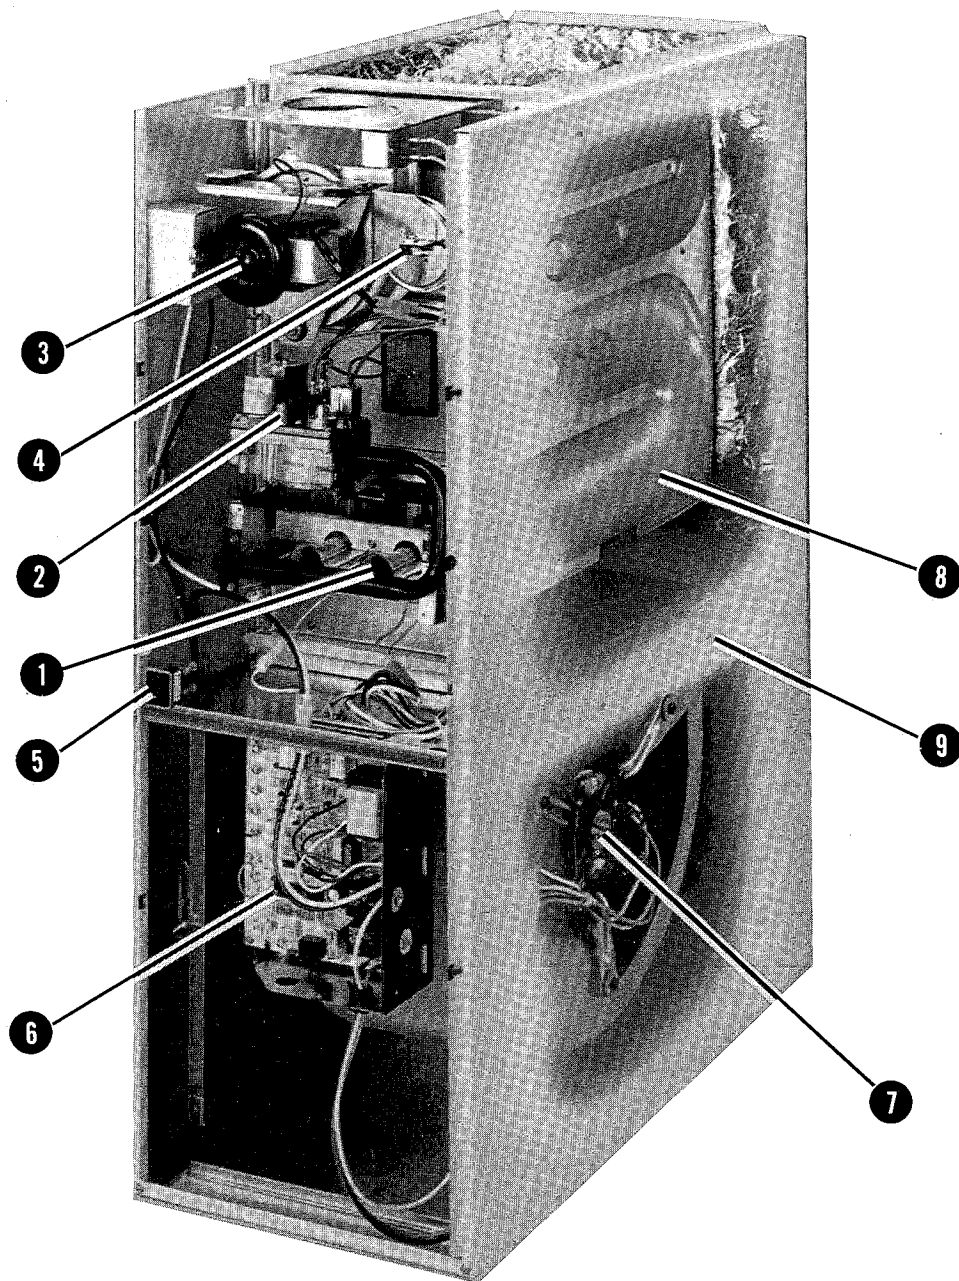


A92085

NOTE: The 58WAV Furnaces are for use with natural gas. These furnaces can be field-converted for propane gas with a factory-authorized and listed accessory conversion kit.

NOTE: Control location and actual control may be different than shown above.

- | | |
|-----------------------------|---------------------------|
| ① Burner Assembly | ⑥ Control Box |
| ② Gas Control Valve | ⑦ Blower and Blower Motor |
| ③ Inducer Assembly | ⑧ Heat Exchanger |
| ④ Pressure Switch | ⑨ Wrap-Around Casing |
| ⑤ Blower Door Safety Switch | |

Carrier Accessories*




A93067

RETURN-AIR PLENUM

Custom-made return-air plenum can be mounted on either side of the furnace. Includes washable filters.

A	25 in.
B	16 in.
C	39-7/8 in.




A93068

SIDE FILTER RACK

Custom-made filter rack for easy connection when a return plenum already exists. Provides easy access for cleaning filter.


A	23-1/8 in.
B	2-3/8 in.
C	14-1/2 in.



A89239

MODEL 31KAX ELECTRONIC AIR CLEANER

Cleans the air of smoke, dirt, and many pollens commonly found. Saves on decorating and cleaning expenses.



A89459

MODEL 49FH HUMIDIFIER

By adding moisture to winter-dry air, a Carrier humidifier can often improve comfort and keep furniture, rugs, and draperies in better condition. Moisturizing household air also helps to retain normal body heat and provides comfort at lower temperatures.

UNIT SIZE	045-08 & 12	070-08 & 12	091-14 & 16	111-12, 16, 20	136-16 & 20	155-20
ELECTRONIC AIR CLEANER	Model 31KAX					
HUMIDIFIER	Model 49FH					
THERMOSTAT	See Master Price Pages					
RETURN-AIR PLENUM (With Washable Filters)	KGARP0101ALL					
SIDE FILTER RACK (With Washable Filter)	KGAFR0101ALL					
TWINNING KIT	KGATW0101HS†					
GAS CONVERSION KIT — NATURAL-TO-PROPANE	KGANP2001HSI					
PROPANE-TO-NATURAL	KGAPN1601HSI					

* Factory authorized and field installed. Gas conversion kits are A.G.A. recognized.

† 16 and 20 Models only.

Physical data

UNIT SIZE	045		070		091		111			136		155
	08	12	08	12	14	16	12	16	20	16	20	20
OUTPUT CAPACITY BTUH† Nonweatherized ICS**	35,000	35,000	53,000	53,000	71,000	71,000	89,000	89,000	89,000	107,000	107,000	124,000
INPUT BTUH*	44,000	44,000	66,000	66,000	88,000	88,000	110,000	110,000	110,000	132,000	132,000	154,000
SHIPPING WEIGHT (lb)	122	124	132	134	150	154	160	166	184	178	194	204
CERTIFIED TEMP RISE RANGE (°F)	25-55	15-45	40-70	30-60	40-70	30-60	55-85	45-75	25-55	50-80	40-70	50-80
CERTIFIED EXT STATIC PRESSURE (in. wc)	Heating	0.10	0.10	0.12	0.12	0.15	0.15	0.20	0.20	0.20	0.20	0.20
	Cooling	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
AIRFLOW CFM‡	Heating	855	1070	830	1175	1150	1445	1175	1415	1720	1645	1975
	Cooling	930	1270	950	1300	1335	1740	1210	1575	2210	1620	1905
LIMIT CONTROL	SPST											
HEATING BLOWER CONTROL	Solid-State Time Operation											
BURNERS (Monoport)	2	2	3	3	4	4	5	5	5	6	6	7
GAS CONNECTION SIZE	1/2-in. NPT											
GAS VALVE (Redundant) Manufacturer	White-Rodgers											
Minimum Inlet Pressure (in. wc)	4.5 (Natural Gas)											
Maximum Inlet Pressure (in. wc)	13.6 (Natural Gas)											
IGNITION DEVICE	Hot Surface											

* Gas input ratings are certified for elevations to 2000 ft. For elevations above 2000 ft, reduce ratings 4% for each 1000 ft above sea level.

† Capacity and AFUE in accordance with U.S. Government DOE test procedures.

‡ Air delivery above 1800 CFM requires that both sides, or a combination of 1 side and bottom, or bottom only of the furnace be used for return air. A filter is required for each return-air supply.


** ICS — Isolated Combustion System

Dimensions

CLEARANCES (In.)

SIZE	045 AND 070	091 — 155
Sides — Single-Wall Vent	1	0
Type B-1, Double-Wall Vent	0	0
Back	0	0
Top of Plenum	1	1
Vent Connector — Single-Wall Vent	6	6
Type B-1, Double-Wall Vent	1	1
Front* Single-Wall Vent	6	6
Type B-1, Double-Wall Vent	3	3
Service	30	30

*The 3-in. front clearance is needed for combustion-air and ventilation-air entry.

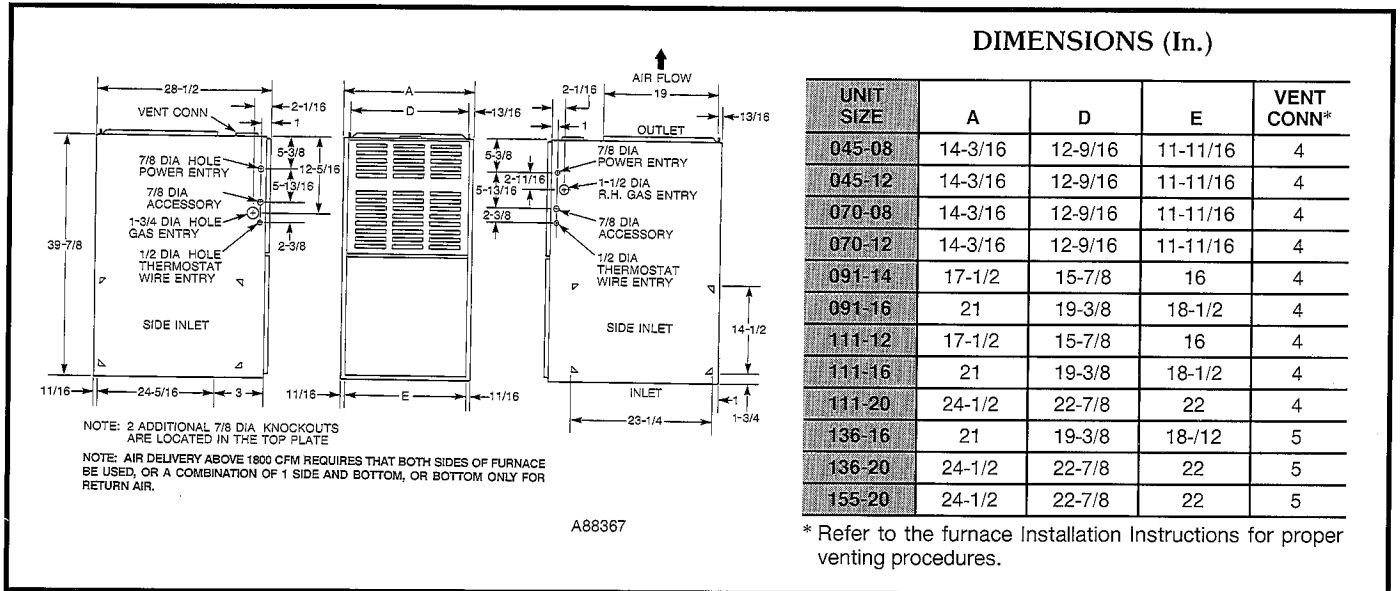

Performance data

UNIT SIZE	045		070		091		111			136		155
	08	12	08	12	14	16	12	16	20	16	20	20
DIRECT-DRIVE MOTOR Hp (PSC)	1/5	1/3	1/5	1/3	1/3	1/2	1/3	1/2	3/4	1/2	3/4	3/4
MOTOR FULL LOAD AMPS	2.9	5.8	2.9	5.8	5.8	7.9	5.8	7.9	11.1	7.9	11.1	11.1
RPM (Nominal) — SPEEDS	1075-3	1075-4	1075-3	1075-4	1075-4	1075-4	1075-4	1075-4	1075-4	1075-4	1075-4	1075-4
BLOWER WHEEL DIAMETER x WIDTHS (in.)	10 x 6	10 x 6	10 x 6	10 x 6	10 x 7	10 x 8	10 x 7	10 x 8	11 x 10	10 x 8	11 x 10	11 x 10
WASHABLE 16 x 25 x 1-in. FILTER — No.	1	1	1	1	1	—	1	—	—	—	—	—
WASHABLE 20 x 25 x 1-in. FILTER — No.	—	—	—	—	—	1	—	1	—	1	—	—

PSC — Permanent Split Capacitor

ENERGY EFFICIENCY

UNIT SIZE	045		070		091		111			136		155
	08	12	08	12	14	16	12	16	20	16	20	20
CAPACITY* Nonweatherized ICS†	35,000	35,000	53,000	53,000	71,000	71,000	89,000	89,000	89,000	107,000	107,000	124,000
AFUE %* Nonweatherized ICS†	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0

*Capacity and AFUE in accordance with U.S. Government DOE test procedures.

†ICS — Isolated Combustion System

AIR DELIVERY — CFM* (With Filter)

UNIT SIZE	SPEED	EXTERNAL STATIC PRESSURE (in. wc)							
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
045-08	High	1030	1005	970	925	880	815	745	615
	Med-High	855	830	800	765	720	670	595	485
	Med-Low	755	725	695	650	605	555	475	400
045-12	High	—	1485	1410	1350	1270	1180	1080	970
	Med-High	—	1375	1315	1240	1165	1095	1000	905
	Med-Low	1250	1205	1165	1120	1060	985	905	805
	Low	1070	1035	1010	970	930	875	805	720
070-08	High	1040	1010	975	935	880	810	735	640
	Med-High	855	830	800	765	715	660	600	490
	Med-Low	745	715	690	650	605	550	475	385
070-12	High	—	1485	1430	1365	1300	1220	1140	1045
	Med-High	—	1355	1305	1260	1200	1135	1055	960
	Med-Low	1175	1170	1140	1110	1055	1005	950	860
	Low	1020	1015	995	970	930	885	825	745
091-14	High	1585	1540	1470	1410	1335	1220	1110	980
	Med-High	1355	1325	1280	1230	1175	1090	1015	910
	Med-Low	1150	1125	1105	1085	1035	965	895	786
	Low	960	950	935	910	880	815	715	580
091-16	High	2010	1950	1875	1810	1740	1660	1550	1455
	Med-High	1675	1660	1625	1600	1545	1490	1395	1295
	Med-Low	1445	1430	1415	1400	1370	1325	1265	1170
	Low	1260	1260	1260	1250	1210	1180	1115	1030
111-12	High	1490	1435	1370	1300	1210	1135	1020	880
	Med-High	1375	1325	1265	1195	1125	1055	945	810
	Med-Low	1205	1175	1130	1075	1025	925	830	675
	Low	1045	1020	1000	960	905	820	700	565
111-16	High	1880	1815	1745	1690	1575	1500	1400	1265
	Med-High	1660	1615	1570	1505	1435	1355	1260	1170
	Med-Low	1455	1410	1375	1350	1290	1235	1145	985
	Low	1265	1265	1240	1210	1180	1110	995	855
111-20	High	2475	2405	2330	2265	2210	2130	2040	1945
	Med-High	2055	2025	2000	1965	1930	1865	1795	1720
	Med-Low	1725	1720	1705	1685	1665	1630	1585	1525
	Low	1500	1515	1510	1500	1480	1460	1415	1370
136-16	High	1900	1845	1780	1705	1620	1530	1445	1320
	Med-High	1695	1645	1580	1520	1460	1385	1280	1155
	Med-Low	1460	1415	1375	1340	1290	1205	1110	—
	Low	1275	1260	1245	1230	1180	1135	—	—
136-20	High	—	2210	2130	2055	1980	1895	1795	1680
	Med-High	2015	1975	1925	1880	1805	1735	1655	1555
	Med-Low	1730	1710	1670	1635	1590	1535	1470	1385
	Low	1525	1520	1495	1450	1410	1375	1315	1245
155-20	High	—	2145	2060	1975	1905	1800	1680	1565
	Med-High	—	1950	1885	1815	1710	1645	1545	1435
	Med-Low	1730	1695	1660	1600	1540	1465	1400	1305
	Low	1520	1500	1460	1410	1360	1310	1245	1155

*Air delivery above 1800 CFM requires that both sides, or a combination of 1 side and bottom, or bottom only of the furnace be used for return air. A filter is required for each return-air supply.
 — Indicates unstable operating conditions.

MEETS DOE RESIDENTIAL CONSERVATION SERVICES PROGRAM STANDARDS.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailers.



Diagram illustrating the wiring connections for a furnace system, including a 115-volt field-supplied fused disconnect, an auxiliary J-box, a control box, thermostat terminals, and a 24-volt terminal block. The diagram also shows connections for a condensing unit and field-supplied fused disconnects for 208/230V or 460V three-phase and 208/230V single phase.

Legend:

- FIELD 24-VOLT WIRING
- FIELD 115-, 208/230-, 460-VOLT WIRING
- FACTORY 24-VOLT WIRING
- FACTORY 115-VOLT WIRING

Components and Connections:

- 115-VOLT FIELD-SUPPLIED FUSED DISCONNECT:** Connected to BLK (Black) and WHT (White) lines, with a GND (Ground) connection.
- AUXILIARY J-BOX:** Connected to the 115-volt fused disconnect and the 24-volt terminal block.
- CONTROL BOX:** Contains a 24-VOLT TERMINAL BLOCK with terminals W, R, G, C, and Y.
- THERMOSTAT TERMINALS:** W, R, G, and Y terminals connected to the 24-volt terminal block.
- 24-VOLT TERMINAL BLOCK:** W, R, G, C, and Y terminals.
- CONDENSING UNIT:** Connected to the 24-volt terminal block and the 208/230V single phase fused disconnect.
- FIELD-SUPPLIED FUSED DISCONNECT (208/230-OR 460-VOLT THREE PHASE):** Connected to the 24-volt terminal block and the 208/230V single phase fused disconnect.
- FIELD-SUPPLIED FUSED DISCONNECT (208/230-VOLT SINGLE PHASE):** Connected to the 24-volt terminal block and the condensing unit.

NOTE: CONNECT Y-TERMINAL AS SHOWN FOR PROPER OPERATION

NOTE: IF ANY OF THE ORIGINAL WIRE, AS SUPPLIED, MUST BE REPLACED, USE SAME TYPE OF EQUIVALENT WIRE.

[illegible]

‡ Time-delay fuse is recommended.

Typical installations

