

Cassette Heat Pump Ductless System

Indoor Model: 40MBQB09C--3

Outdoor Model: 38MAQB09---3



turn to the experts™

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____



CASSETTE STANDARD FEATURES

- Variable Speed (Inverter)
- Built-in base pan heater
- Modes: Cool, Heat, Dry, Fan, Auto
- Timer
- Louver Control (Fixed or Swing)
- Built in Condensate Pump
- Follow me
- 46°F Heating Mode (Heating Setback)

CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (optional)
- Grille is required; sold separately.



Performance
SERIES

(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size	9	
	Outdoor Model	38MAQB09---3	
	Indoor Model	40MBQB09C--3	
Performance	Cooling Rated Capacity	Btu/h	9,000
	Cooling Cap. Range Min - Max	Btu/h	3,500-11,000
	SEER	19	
	EER	13	
	Heating Rated Capacity	Btu/h	10,000
	Heating Cap. Range Min - Max	Btu/h	4,500-11,500
	HSPF	10	
Controls	COP	W/W	3.1
	Wireless Remote Controller (°F/°C)	Standard	
Operating Range	Wired Remote Controller (°F/°C)	Optional	
	Cooling Outdoor DB Min - Max	°F	-4~122
	Heating Outdoor DB Min - Max	°F	-4~86
Piping	Total Piping Length	Ft.	82
	Piping Lift	Ft.	32
	Pipe Connection Size - Liquid	In.	1/4
	Pipe Connection Size - Suction	In.	3/8
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered from outdoor unit	
	MCA	A.	15
	MOCP - Fuse Rating	A.	15


Outdoor	Unit Width	In.	31.9
	Unit Height	In.	22.0
	Unit Depth	In.	12.2
	Net Weight	Lbs.	82.5
	Airflow	CFM	945
	Sound Pressure	dB(A)	56
Indoor	Body Unit Width	In.	22.4
	Body Unit Height	In.	10.2
	Body Unit Depth	In.	22.4
	Body Net Weight	Lbs.	35.3
	Panel Unit Width	In.	25.5
	Panel Unit Height	In.	2.0
	Panel Unit Depth	In.	25.5
	Panel Net Weight	Lbs.	5.5
	Number of Fan Speeds	3	
	Airflow (lowest to highest)	CFM	260/320/380
	Sound Pressure (lowest to highest)	dB(A)	34/39/44

Accessories

- ☐ Wired Control Convertible – Fahrenheit / Celsius
- ☐ Grille/Ceiling Panel

- ☐ Insulated 25' Line Set - 1/4" x 3/8"

Construction View Indoor Unit 40MBQB09C--3

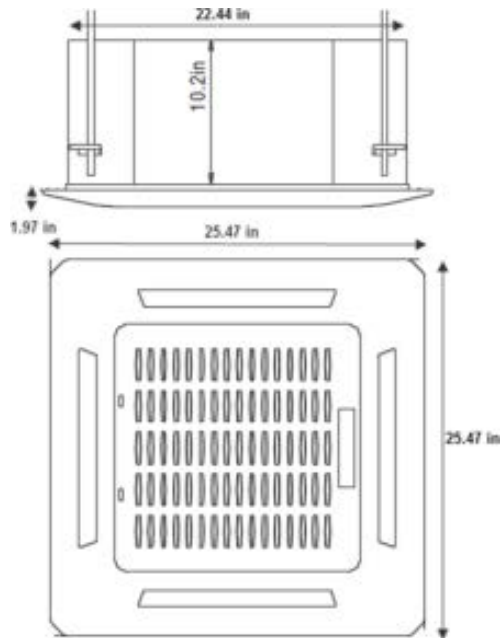

Construction View Outdoor Unit 38MAQB09---3

