

High Wall Heat Pump Ductless System

Indoor Model:

40MAQB30B--3

Carrier

turn to the experts 

Submittal Data

Job Data:

Location:

Buyer: Buyer P.O. #:

Carrier #:

Unit Number:

Model Number:

Performance Data Certified By:

Date:



Performance
SERIES

STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Anti-corrosive fin coating

CONTROLS:

- Wireless Remote Controller included with indoor unit
- Wired Remote Controller KSACN0401AAA (7 Day programmable) (Optional)

LIMITED WARRANTY*

- 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years

*For residential applications. See warranty for full details.

| | | | |
|-----------------|--|-------------------------------------|---------------|
| System | Size | 30 | |
| | Indoor Model | 40MAQB30B-3 | |
| Electrical | Voltage, Phase, Cycle | V/Ph/Hz | 208/230-1-60 |
| | Power Supply | Indoor unit powered by outdoor unit | |
| Controls | MCA | A. | 0.4 |
| | Wireless Remote Controller (°F/°C Convertible) | Standard | |
| Operating Range | Wired Remote Controller (°F/°C Convertible) | Optional | |
| | Cooling Indoor DB Min -Max | °F(°C) | 63~86 (17~30) |
| Piping | Heating Indoor DB Min -Max | °F(°C) | 32~86 (0~30) |
| | Pipe Connection Size - Liquid | in (mm) | 3/8 (9.52) |
| | Pipe Connection Size - Suction | in (mm) | 5/8 (16) |

| | | | |
|-------------|------------------------------------|--------------|-----------------|
| Indoor Coil | Face Area | Sq. Ft. | 3.68 |
| | No. Rows | | 3 |
| | Fins per inch | | 18 |
| | Circuits | | 7 |
| Indoor | Unit Width | in (mm) | 46.69 (1186) |
| | Unit Height | in (mm) | 13.39 (343) |
| | Unit Depth | in (mm) | 10.16 (258) |
| | Net Weight | lbs (kg) | 40.12 (18.2) |
| | Number of Fan Speeds | | 4 |
| | Airflow (lowest to highest) | CFM | 520/620/780/870 |
| | Sound Pressure (lowest to highest) | dB(A) | 39/45/50 |
| | Air throw Data | ft (m) | 36 (11) |
| | Moisture removal | Pint/h (L/h) | 8.1 (3.9) |
| | Field Drain Pipe Size O.D | in (mm) | 0.625 (16) |

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

For Compatibility See Product Data

Accessories



| | |
|---------------|---|
| 53DS-900--118 | Condensate Pump (208/230V) |
| KSACN0101AAA | Wired Remote Control with Timer Function |
| KSACN0401AAA | Wired Remote Control 7 day Programmable* |
| KSAIF0301AAA | Wi-Fi™ Kit High Wall Mid-Tier |
| KSAIC0101230 | 24V Interface Kit 230V |
| 53DS-900--090 | Wireless Remote Control Locking Mount Kit |

Note: *KSACN0401AAA Wired Remote Control 7 Day programmable compatible with High Walls Units starting with Serial Number 0216V10001.

**24V Interface compatible with High Walls Units starting with Serial Number 4316V10001.

Construction View

Indoor Model: **40MAQB30B--3**

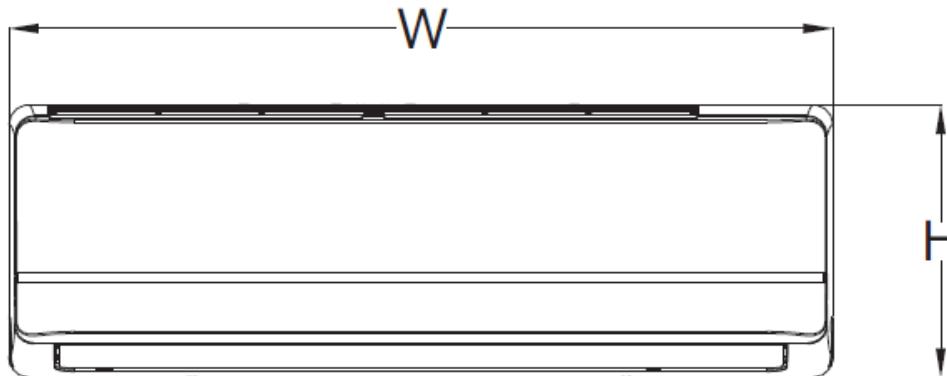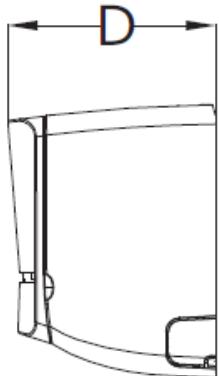

| | | |
|-------------|----------|--------------|
| Unit Width | in (mm) | 46.69 (1186) |
| Unit Height | in (mm) | 13.39 (343) |
| Unit Depth | in (mm) | 10.16 (258) |
| Net Weight | lbs (kg) | 40.12 (18.2) |

