

Ducted Heat Pump Ductless System

Indoor Model: 40MBQB48D--3



Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:



Performance
SERIES

STANDARD FEATURES

- Built-in condensate pump
- Modes: Cool, Heat, Dry, Fan, Auto
- Timer
- One touch memory
- Follow me
- 46°F Heating Mode (Heating Setback)

CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (standard)

System	Size		48
	Indoor Model		40MBQB48D--3
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208/230-1-60
	Power Supply		Indoor unit powered by outdoor unit
	MCA	A.	1.2
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
	Wired Remote Controller (°F/°C Convertible)		Standard
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)
	Pipe Connection Size - Suction	in (mm)	5/8 (16)

Indoor Coil	Face Area	Sq. Ft.	4.20
	No. Rows		4
	Fins per inch		16
	Circuits		8
Indoor	Unit Width	in (mm)	47.24 (1200)
	Unit Height	in (mm)	11.81 (300)
	Unit Depth	in (mm)	34.06 (865)
	Net Weight	lbs (kg)	99.21 (45)
	Number of Fan Speeds		3
	Airflow (lowest to highest)	CFM	940/1180/1470
	Sound Pressure (lowest to highest)	dB(A)	41/44/46
	Max Static Pressure	In.WG.	0.4


Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

Compatibility Table

Indoor Unit	40MBQB48D--3
Outdoor Unit	38MBQB48---3

Construction View

Indoor Model: 40MBQB48D--3

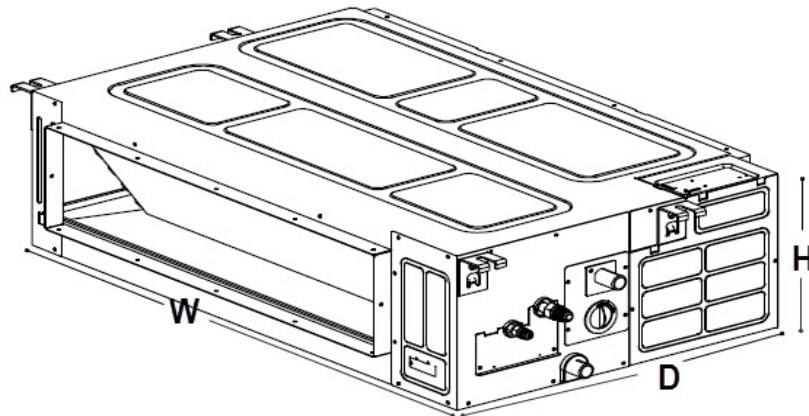

Unit Width	in (mm)	47.24 (1200)
Unit Height	in (mm)	11.81 (300)
Unit Depth	in (mm)	34.06 (865)
Net Weight	lbs (kg)	99.21 (45)

