

High Wall Cooling Only Ductless System

Indoor Model: D5FEHAA24XCK


Job Data:

Tag #:

Date:

Location:


Carrier#:

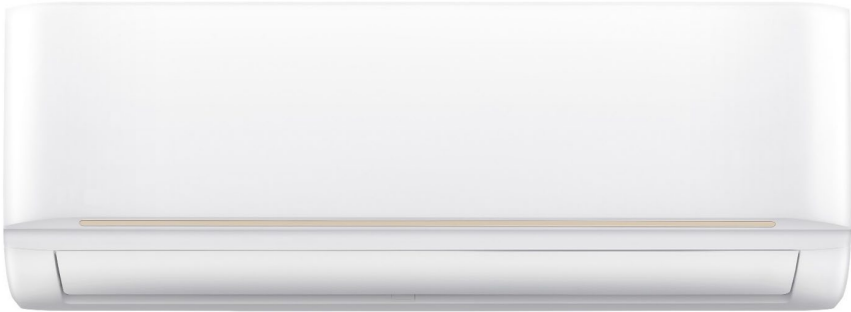

- INDOOR STANDARD FEATURES**
- Modes: Cool, Dry, Fan, Auto
 - Four fan speeds
 - Sleep Mode
 - Turbo Mode
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Pipe Connection Size - Liquid: 3/8in (9.52mm)
 - Pipe Connection Size - Suction: 5/8in (15.9mm)

RESIDENTIAL APPLICATION LIMITED WARRANTY*


• Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

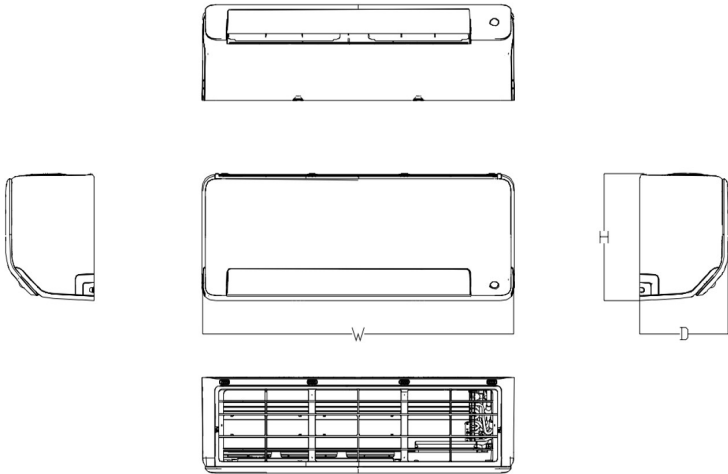

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
24K	mm	1082	234	337
	inch	42.6	9.21	13.27

NOTE: Images for illustration purposes only. Actual models may be slightly different.

D5FEHAA24XCK			
System	Indoor Model #		D5FEHAA24XCK
	Indoor Size		24000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	*F(°C)	60°90(16 ~ 32)
Indoor Coil	Face Area	Sq. Ft.	2.97
	No. Rows		2
	Fins per inch		20
	Circuits		4
Indoor Unit	Number of Fan Speeds		1200/960/720
	Airflow (highest to lowest)	CFM	588.6/470.9/400.2
	Sound Pressure (highest to lowest)	dB(A)	46.5/40/26.5/20
Dimensions	Height	in (mm)	13.27(337)
	Width	in (mm)	42.6(1082)
	Depth	in (mm)	9.21(234)
	Net Weight	lbs (kg)	30.86(14)
	Shipping Height	in (mm)	12.4(315)
	Shipping Width	in (mm)	45.47(1155)
	Shipping Depth	in (mm)	16.34(415)
	Shipping Net Weight	lbs (kg)	39.9(18.1)
CONTROLS			
Standard	Wireless Remote Controller (*F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	

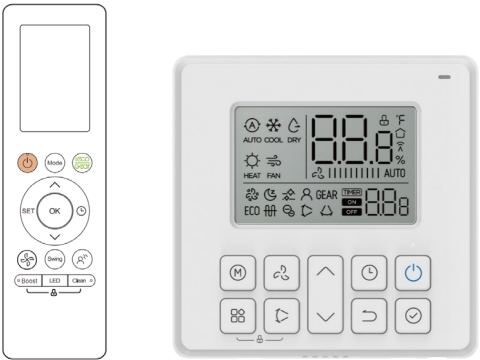

R-454B