

High Wall Heat Pump Ductless System

Indoor Model: **DLFEHBH24XAK**

Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:



STANDARD FEATURES:

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Aluminum Golden Hydrophilic pre-coated fins

CONTROLS:

- Wireless Remote Controller included with indoor unit

| | | | |
|-----------------|--|-------------------------------------|---------------|
| System | Size | 24 | |
| | Indoor Model | DLFEHBH24XAK | |
| Electrical | Voltage, Phase, Cycle | V/Ph/Hz | 208/230-1-60 |
| | Power Supply | Indoor unit powered by outdoor unit | |
| | MCA | A. | 0.632 |
| Controls | Wireless Remote Controller (°F/°C Convertible) | Standard | |
| | Wired Remote Controller (°F/°C Convertible) | Optional | |
| Operating Range | Cooling Indoor DB Min -Max | °F(°C) | 63~90 (17~32) |
| | Heating Indoor DB Min -Max | °F(°C) | 32~86 (0~30) |
| Piping | Pipe Connection Size - Liquid | in (mm) | 3/8 (9.52) |
| | Pipe Connection Size - Suction | in (mm) | 5/8 (16) |

| | | | |
|----------------------------|------------------------------------|--------------|-----------------|
| Indoor Coil | Face Area | Sq. Ft. | 2.67 |
| | No. Rows | | 2 |
| | Fins per inch | | 20 |
| | Circuits | | 4 |
| Indoor | Unit Width | in (mm) | 42.60 (1082) |
| | Unit Height | in (mm) | 13.27 (337) |
| | Unit Depth | in (mm) | 9.21 (234) |
| | Net Weight | lbs (kg) | 29.98 (13.6) |
| | Number of Fan Speeds | | 4 |
| | Airflow (lowest to highest) | CFM | 330/402/546/728 |
| | Sound Pressure (lowest to highest) | dB(A) | 32/38/44/51 |
| | Air throw Data | ft (m) | 27.2 (8.3) |
| | Moisture removal | Pint/h (L/h) | 5.3 (2.54) |
| Field Drain Pipe Size O.D. | in (mm) | 5/8 (16) | |



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

| | |
|--------------|--|
| KSACN0901AAA | Wired Remote Control 7 Day Programmable |
| KSACN0101AAA | Wired Remote Control with Timer Function |
| KSAIF0601AAA | Wi-Fi™ Kit High Wall Mid-Tier |
| KSAIC0401230 | 24V Interface Kit 230V |

Construction View

Indoor Model: **DLFEHBH24XAK**

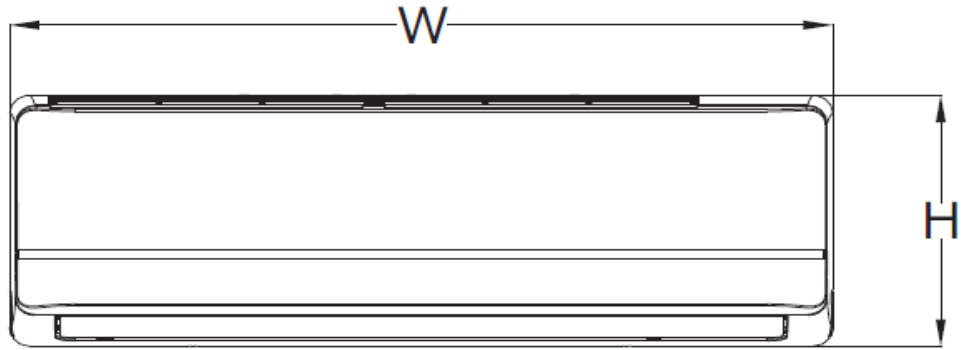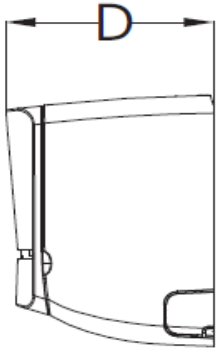

| | | |
|-------------|----------|--------------|
| Unit Width | in (mm) | 42.60 (1082) |
| Unit Height | in (mm) | 13.27 (337) |
| Unit Depth | in (mm) | 9.21 (234) |
| Net Weight | lbs (kg) | 29.98 (13.6) |

